

TOUCH II

User friendly and totally programmable 4,3" microprocessor.
 USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
 Videos show on display: ads, instructions, (useful for coin laundry).
 37 languages.

VERSATILITY

OPL <> COIN - Standard models can be programmed as OPL or coin laundry version, central pay, etc.
 SINGLE <> STACKED - Models can be stacked on top of a washer or on another dryer.
 Control panels can be assembled between both drums for better ergonomics.
 Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.
 Wet Cleaning features.

OUTSTANDING FEATURES

Reduced drying times (less than 45 minutes).

CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
 Management of laundries: OPL and COIN.
 Remote payment.

EFFICIENCY

Optimised airflow.
 Axial airflow.
 Wide fluff filter as drawer.
 Efficient design.

ROBUSTNESS

Outer casing in grey skinplate (white lacquered in HPDL model).
 Robust aluminium door.
 Industrial fan and powerful airflow.
 Sturdy construction of the dryer structure and panels.

OTHERS

Galvanized drum.
 Electric and gas heated models.
 Grey skinplate panels.
 CE approved product




OPTIONS

- License IoT - DOMUSCONNECT
- Natural gas heated tumble dryer
- Fire suppression system SFEX (only TOUCH II models)
- Plinth for better ergonomics HPD (except HPDL)
- Plinth for better ergonomics in stainless steel for HPD (except HPDL)
- Drum stainless steel AISI 304
- Outer casing stainless steel AISI 304
- Reverse door opening
- Control panel mounted below
- Tropicalized model (TOUCH II)
- EFFICIENT DRY humidity control (only TOUCH II models)
- Several payment systems for self-service
- 400V 3 / 230 I / 3 60 Hz (HPD, HPDL)
- 440-480V 3~ 60 Hz (marine)

| CAPACITY & DRUM | | UNIT. | HPD-8 TOUCH II | |
|---------------------------------------|--|----------------|-------------------|--------------------|
| Capacity 1/18 | | Kg | 8,9 | |
| | | lb | 19,6 | |
| Capacity 1/20 | | Kg | 8 | |
| | | lb | 17,6 | |
| Ø Drum | | mm | 590 | |
| | | inch | 23,2 | |
| Drum length | | mm | 585 | |
| | | inch | 23 | |
| Drum volume | | l | 160 | |
| | | cu ft | 5,65 | |
| Ø Door hole | | mm | 480 | |
| | | inch | 18,9 | |
| Door center height | | mm | 554 | |
| | | inch | 21,8 | |
| Height from floor to bottom of door | | mm | 250 | |
| | | inch | 9,84 | |
| ELECTRIC HEATING | | | | |
| Evaporation capacity | | L/h | 5,3 | |
| | | US gallon/h | 1,40 | |
| Hourly output | | Kg/h | 10,6 | |
| | | lb/h | 23,37 | |
| Installed heating power | | kW | 4,5 / 6,75 | |
| Installed electrical power | | kW | 4,92 / 7,17 | |
| GAS HEATING | | | | |
| Evaporation capacity (gas model) | | L/h | 5,3 | |
| | | US gallon/h | 1,40 | |
| Hourly output (gas model) | | Kg/h | 10,6 | |
| | | lb/h | 23,37 | |
| Installed gas heating power | | kcal/h | 5761 | |
| | | Btu/h | 22861,3 | |
| Installed gas heating power | | kW | 6,70 | |
| Installed electrical power | | kW | 0,42 | |
| Instant propane gas consumption (G31) | | Kg/h | 0,57 | |
| | | lb/h | 1,26 | |
| Instant natural gas consumption (G20) | | m³/h | 0,71 | |
| | | cfm | 0,42 | |
| Ø Gas inlet | | BSPP ISO 228-1 | 1/2" | |
| POWER AND VENTILATION | | | | |
| Drum motor power | | kW | 0,37 (2) | |
| Fan motor power | | kW | 0,37(2) | |
| Nominal air flow rate | | m³/h | 300 | |
| | | cfm | 177 | |
| Ø Fume exhaust | | mm | 100 | |
| | | inch | 3,94 | |
| HEAT EMISSION | | | | |
| Maximum total heat emission | | kW | 0,5 | |
| | | Btu/h | 1536 | |
| Max. front heat emission | | kW | 0,3 | |
| | | Btu/h | 1075 | |
| CONNECTIONS | | | | |
| Tension 230V - I + N + T | | Nº x mm² / A | E 3 x 10 / 40A | G 3 x 1,5 / 10A |
| Tension 230V - III + T | | Nº x mm² / A | 4 x 4 / 25A | 3 x 1,5 / 10A (3) |
| Tension 400V - III + N + T | | Nº x mm² / A | 5 x 2,5 / 16A | 3 x 1,5 / 10A (4) |
| NET DIMENSIONS / D. WITH PACKING | | | | |
| Net / gross width | | mm | 680 / 710 | |
| | | inch | 26,8 / 28 | |

| | | |
|--------------------|------|---------------|
| Net / gross depth | mm | 722 / 832 |
| | inch | 28,4 / 32,8 |
| Net / gross height | mm | 1.056 / 1.141 |
| | inch | 41,6 / 44,9 |
| Net / gross weight | Kg | 89 / 108 |
| | lb | 196 / 237 |
| OTHERS | | |
| Sound level | dB | 62 |

- (1) Configurable via a terminal block system.
- (2) It's a single motor for both the drum and fan.
- (3) Connect two phases and ground.
- (4) Connect phase, neutral, and ground.

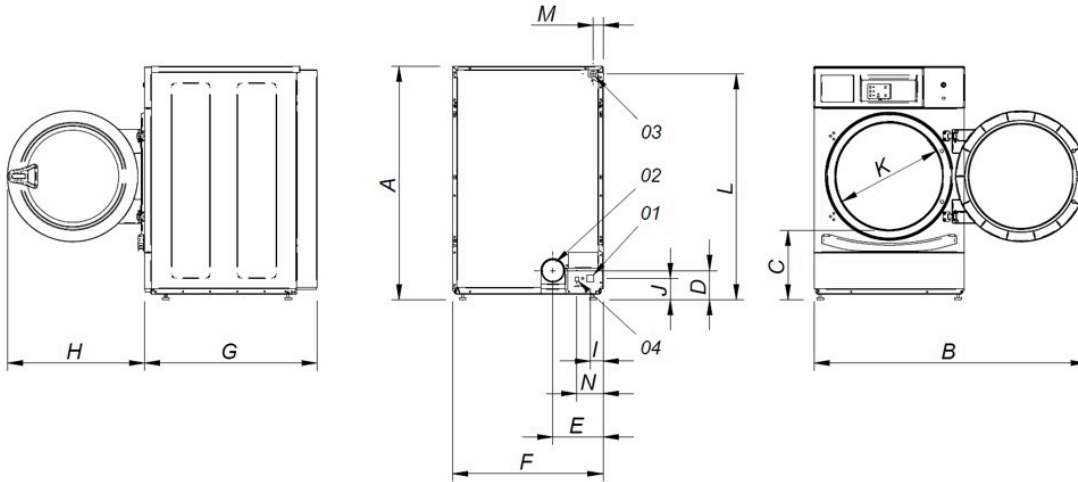

- 01 Power supply
- 02 Fumes output Ø 100
- 03 Gas inlet 1/2"
- 04 Ethernet connection (only TOUCH control)

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|--------|-------|-------|-----|-----|-----|-----|-----|-----|----|----|-----|-------|----|-----|
| HPD-8 | 1.056 | 1.227 | 320 | 140 | 226 | 680 | 722 | 615 | 57 | 91 | 480 | 1.015 | 50 | 118 |
| HPD-10 | 1.056 | 1.227 | 320 | 140 | 226 | 680 | 775 | 615 | 57 | 91 | 480 | 1.015 | 50 | 118 |