
DOMUS

WINNING THE FUTURE THROUGH INNOVATION

CF-2665 TOUCH II
Flatwork ironers CF Ø 650

TOUCH II

- **TOUCH II**: easy-to-use microprocessor, fully programmable with 7'' touchscreen.
- Multilingual interface.
- Unlimited programmes: in addition to presets, create as many as your business needs.
- USB port: configure, update, and analyse machines without an internet connection.

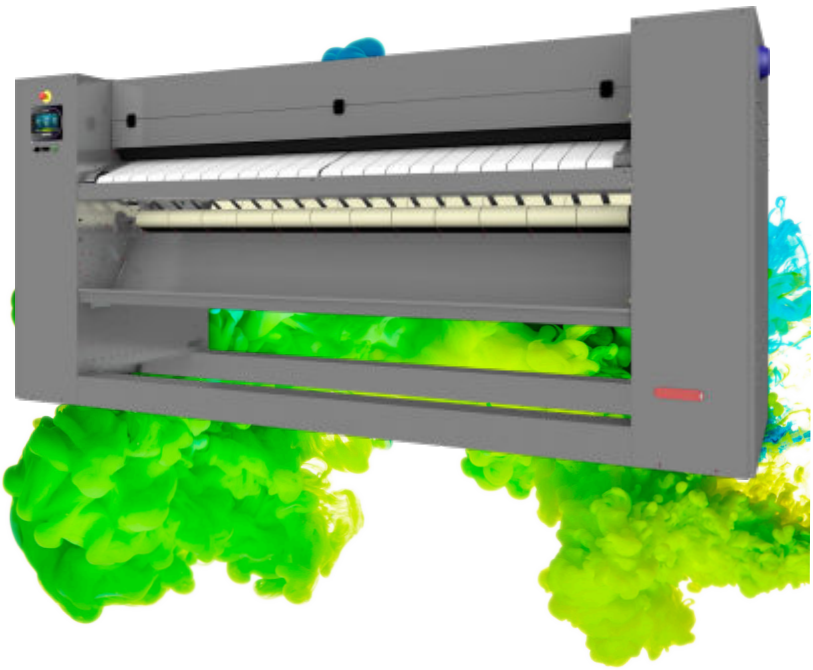

EFFICIENCY

- **EFFICIENT IRON**: automatically adjusts ironing speed based on residual moisture, saving energy.
- **OPTIMAL FEEDING**: automatic speed adjustment – slower for feeding, faster for higher output, up to 15 m/min (standard).
- Excellent heat transfer thanks to the roller's material and thickness.
- Auto stop at 80 ºC: extends lifespan of ironing belts.
- Gas circuit at the bottom, reducing energy consumption.
- Accurate temperature control via microprocessor: low energy use.
- Models with radiant gas burner: up to 25% more output – saving time and energy.

ROBUSTNESS

- Roller with inverter.
- Panels in skinplate.
- Ironing belts in Nomex: resistant to high temperatures.
- Nickel-plated cylinder – corrosion-resistant and longer lasting (optional).

ERGONOMICS

- Acoustic comfort: max 65 dB.
- Easy to clean, more hygienic.
- Optimal feeding height: 1,120 mm.
- LED indicator 3 ironing zones for easier operation (optional).

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections: electrical and flue gas.
- Comprehensive technical menu: statistics, self-test, data retrieval for technicians and maintenance.
- Remote communication: rapid intervention.

VERSATILITY


- Radiant gas model: flexibility for higher output and better adaptation to high-ceiling spaces.
- Key options:
  - **SRE**: Standard rear outlet without folder (new).
  - **LF**: Front outlet with integrated folder.
  - **LFRE**: Front and rear outlet with integrated folder.
  - **CPL-CROSS**: External transverse folder.

OPTIONS

- Feeding tray CF-2665
- Leveling feet kit
- 3-zone LED ironing indicator
- Nickel plated roll CF-2665 (except steam model)
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Built-in lengthfolder CF-2665 (front exit)
- Built-in lengthfolder + rear and front exit CF-2665
- Cross folder CPL-CROSS CF-2665
- Rear exit without folder CF-2665
- No drop tray (laundry recovery) CF-2665
- Antistatic belts for CF-2665 ironers
- Antistatic ironing belts + ionizing bar CF-2665 for folder
- Maritime wooden packing for CF-2665
- 230V 3~ 50/60Hz CF-2665 E
- 230V 3~ 60Hz CF-2665 G
- 440V 3~ 50/60Hz CF-2665 E (marine)
- 120V 1~ + N 60Hz CF-2665 G (Gas US)

GENERAL DETAILS	UNIT.	CF-2665 TOUCH II	
Theoretical output Electric heating* standard mod. front or rear exit	Kg/h	115	
	lb/h	254	
Theoretical output Electric heating* mod. Folder front exit	Kg/h	81	
	lb/h	177	
Theoretical output Electric heating* mod. Folder front and rear exit	Kg/h	75	
	lb/h	165	
Theoretical production Gas atmo heating*	Kg/h	N/A	
	lb/h	N/A	
Theoretical production Radiant gas heating* mod standard front or rear exit	Kg/h	132	
	lb/l	291	
Theoretical production Radiant gas heating* mod folder front exit	Kg/h	92	
	lb/l	204	
Theoretical production Radiant gas heating* mod folder front and rear exit	Kg/h	86	
	lb/l	189	
Roll Ø	mm	650	
	inch	25,59	
Working width	mm	2.600	
	inch	102,36	
Height floor-feeding belts	mm	1.170	
	inch	46,06	
Working speed standard mod.	m/min	0,5 - 15	
	ft/min	1,6 - 49	
Working speed mod. with folder	m/min	2 - 10	
	ft/min	6,5 - 32	
Electronic control	-	TOUCH II	
No. Programs	-	5	
Lenght folder	-	OPT.	
Rear exit	-	OPT.	
Large surface contact with linen	-	305°	
POWER			
Roll motor power	kW	0,61	
Fan motor power	kW	0,5	
TOTAL motor power	kW	1,11	
Electric mod.: heating power	kW	54	
Electric mod: Total electric power	kW	55,11	
Gas mod.: heating power	kW	69	
Gas mod.: total electric power	kW	1,11	
Steam mod.: heating power	kW	76	
Steam mod.: total electric power	kW	1,11	
Steam consumption	Kg/h	80	
Additional electric power standard mod. Rear exit	kW	0,28	
Additional electric power mod with folder front exit	kW	0,66	
Additional electric power mod with folder front and rear exit	kW	0,76	
CONNECTIONS		E	G/S
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 10A
	nº x AWG/A	N/A	3 x 13 / 10A
Tension 230V - III + T	Nº x mm² / A	4 x 35 / 160A	4 x 2,5 / 10A
	nº x AWG/A	4 x 2 / 160A	4 x 13 / 10A
Tension 400V - III + N + T	Nº x mm² / A	5 x 25 / 100A	5 x 2,5 / 10A
	nº x AWG/A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	3710 / 3890	
	inch	146,1 / 153,1	

Net depth (with rear exit open) / gross depth	mm	1175 (1480) / 1360
	inch	46,3 (58,2) / 53,5
Net height / gross height	mm	1780 / 1940
	inch	70,1 / 76,4
Net weight / gross weight standard mod.	kg	1717 / 1797
	lbs	3785 / 3962
Net weight / gross weight standard mod. with rear exit	kg	1757 / 1837
	lbs	3874 / 4050
Net weight / gross weight mod. Folder front exit	kg	1812 / 1892
	lbs	3995 / 4171
Net weight / gross weight mod. Folder front and rear exit	kg	1872 / 1952
	lbs	4127 / 4303
Net volume (with rear exit) / Gross volume	m³	7,76 (9,53) / 10,26
	f³	274 (336,42) / 362
OTHERS		
No. Fume outlet	Nº	2
Ø Fume outlet	mm	153
	inch	6,0
Air Flow	m³/h	1.200
	cfm	706
Sound level	dB	65
Evaporation power standard mod.	l/h	59
	USgallon/h	15,7
Evaporation power mod. Folder front exit	l/h	42
	USgallon/h	11
Evaporation power mod. Folder front and rear exit	l/h	39
	USgallon/h	10,2

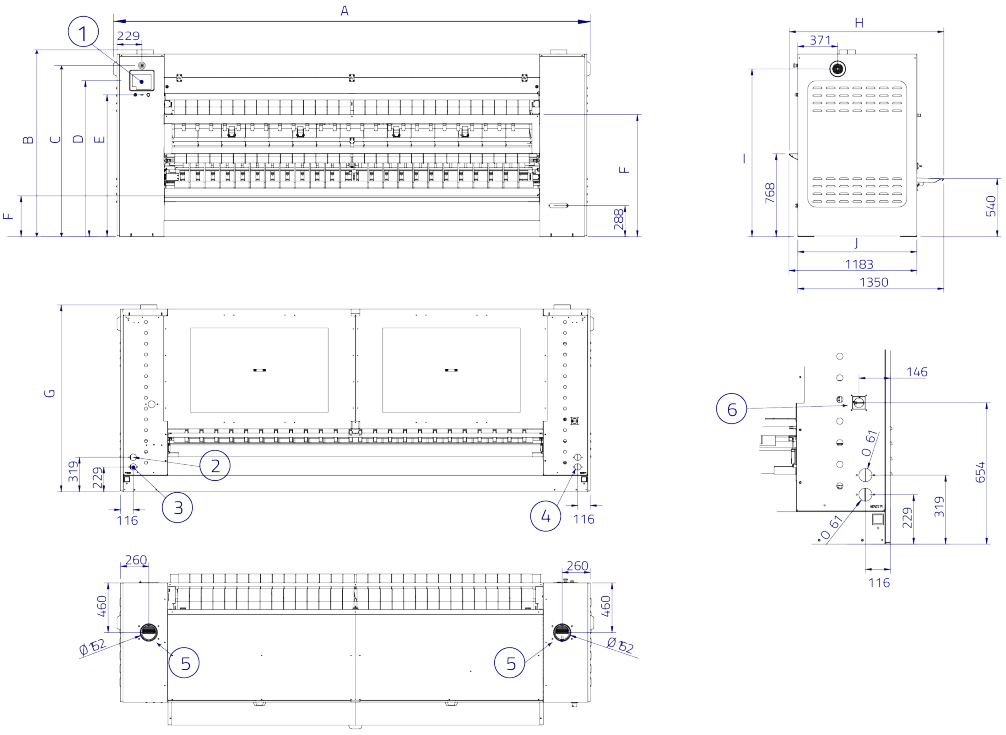

1. TOUCH II control with touch screen
2. Touch-screen control panel
3. Gas Ø22 or steam Ø3/4" male connection
4. Electrical connection
5. Exhaust outlet (Ø152 ext.)
6. Main isolator

--

H. Dimensions with rear tray retracted / extended.

	A	H
2000 mm	3.110	1.428 / 1.480
2600 mm	3.710	1.428 / 1.480
3300 mm	4.410	1.428 / 1.480