

TOUCH II

7" touch screen easy to use and fully programmable, double display
 Connection USB. Free software online for programming, telemetry, data analysis., etc.
 Videos on display (instructions, etc.)
 37 languages.
 8 dosing signals as standard.

OUTSTANDING FEATURES

Automatic positioning of drum with motor brake and UPS device (in case of power failure).
 3 water inlets, double drain.
 Wet Cleaning, telemetry standard.
 G FACTOR 325.
 Heating: electric, steam, dual heating as option.

EFFICIENCY

Intelligent consumption.
 Optimal loading: manual indication of weight.
 Water Recovery tanks ready: **ECOTANK XL**.
 Low water consumption.
 High G FACTOR: reduced residual moisture > reduced drying time.

CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
 Remote technical service.
 Laundry management.

ERGONOMICS

Huge door opening making loading/unloading easier.
 User-friendly drum opening by push button.
 Loading height: door base 960 mm.

MAINTENANCE

Electric components on the left side, mechanical components on the right side and connections on the top (protected from water and detergents).
 Technical menu: statistics, alarms, autotest, data recovery for technicians and maintenance.

OTHERS

2 opposed doors. Pass-through barrier washer.
 Ready to be connected to dosing pumps.
 Grey skinplate outer casing.
 Drum and vat in stainless steel AISI 304.
 Frequency inverter to control imbalance.
 CE approved product




OPTIONS

- License IoT - DOMUSCONNECT
- Ready for ECOTANK XL conn. 1" for barriers ASA-100
- Weighing sensor system on feet for ASA-100. Includes kit with 6 extra dosing signals.
- 6 extra dosing signals card for automatic liquid dosing
- Double heating Electric + Steam
- Titration valve
- End of cycle light alarm
- 4 compartment detergent box
- Stainless steel outer casing
- Stainless steel frame
- Screen and panels protector
- Maritime wooden packing for
- 230V III 50/60Hz
- 440V III 60Hz (maritime)

DRUM	UNIT.	ASA-100 TOUCH II	
Load capacity 1:9	Kg	100	
	lb	220,5	
Load capacity 1:10	Kg	90	
	lb	198,4	
Volume	l	900	
	ft ³	31,78	
Diameter	mm	1.050	
	inch	41,3	
Depth	mm	1.032	
	inch	40,6	
Drum compartments	Nº	2	
GENERAL DETAILS			
Washing speed	rpm	45	
Spining speed	rpm	750	
G Factor	-	325	
TOUCH II Control	-	7"	
Double screen	-	STD	
Motor break	-	STD	
Double drainage	-	STD	
DOOR			
Drum opening dimensions	mm	900 x 500	
	inch	35,4 x 19,6	
Vat opening dimensions	mm	960 x 700	
	inch	37,8 x 27,55	
Height door bottom	mm	960	
	inch	37,8	
POWER			
Motor	kW	15	
Electric heating (elec. mod)	kW	60	
Total electric power (elec. mod)	kW	75	
Total electric power (steam mod)	kW	15	
CONNECTIONS		E/DUAL	S
Tension 230V I + N + T 50/60Hz	Nº x mm ² /A	-	-
Tension 230V III + T 50/60Hz	Nº x mm ² /A	-	4 x 10 / 40A
Tension 400V III + N + T 50/60Hz	Nº x mm ² /A	5 x 25 / 120A	5 x 6 / 25A
Water inlets number	-	3	
Water inlet	inch	1"	
Water pressure	bar	3 - 5	
	psi	43 - 72	
Steam inlet (steam mod)	inch	3/4"	
Steam pressure	bar	4-8	
	psi	58-116	
Drain number	-	2	
Drain evacuation capacity	l/min	2x160	
	cfm	2x5,65	
Drain	inch	3"	
OVERALL DIMENSIONS			
Net / Gross width	mm	1.742 (1.894) / 1.890	
	inch	68,6 (74,6) / 74,4	
Net / Gross depth	mm	1.468 / 1.540	
	inch	57,8 / 60,6	
Net / Gross height	mm	1.982 / 2.150	
	inch	78 / 84,6	
Net / Gross weight	kg	1.900 / 1.958	
	lb	4.189 / 4.316,7	

Volume	m ³	6,26
	ft ³	221

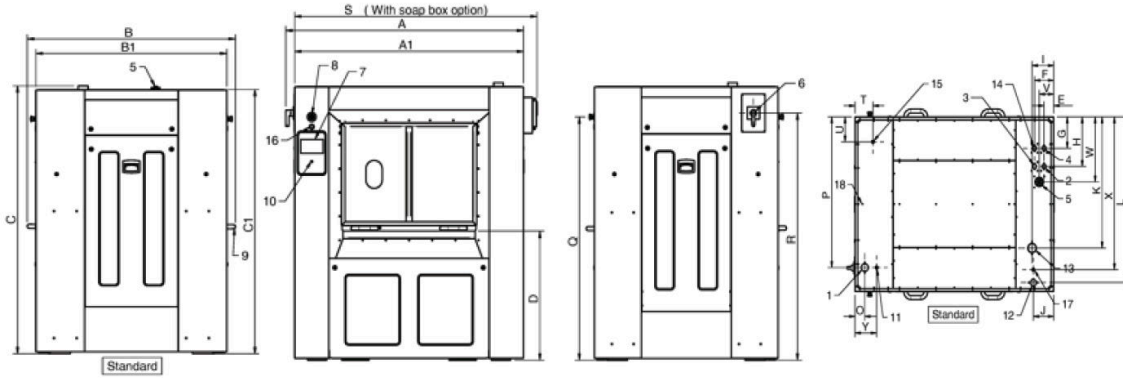

1. Electrical connexion
2. Cold water inlet
3. Soft water inlet
4. Hot water inlet
5. Liquid products inlet
6. Main switch
7. Control panel
8. Emergency stop
9. Door opening
10. USB port
11. Dosing pumps connexion
12. Steam inlet
13. Exhaust
14. Cold water for detergent box
15. Compressed air connection
16. Manual rotation
17. Compressed air steam valve
18. Ethernet port

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	O	P	Q	R	S	T	U	V	W	X	Y
ASA-100	1.742	1.468	1.982	1.677	1.346	1.954	921	82	162	262	382	183	172	1.013	1.279	83	1.163	1.737	1.765	1.777	150	192	122	502	1.179	183