

TOUCH II

- **TOUCH II:** Easy-to-use microprocessor, fully programmable with 7" touchscreen.
- Multilingual interface.
- Dual-side screen.
- Detergent dosing: 8 standard signals + 6 optional.
- USB port: configure, update and analyse without internet.
- Programme customisation based on your needs.

OUTSTANDING FEATURES

- 3 water inlets.
- WET CLEANING.
- Skinplate cabinet with stainless steel top - easy to clean.
- Heating model: electric and steam.
- Automatic drum positioning (optional) + UPS system for short power cuts.

EFFICIENCY

- WATER SAVING: three configurable saving levels.
- OPTIMAL LOADING: manual load weight input.
- Ready for **ECOTANK XL** connection.
- High G Factor: lower residual moisture > shorter drying time.
- Low water consumption.
- Automatic weighing system (option).
- **LEMS pulse concentrator by Onnera** (ask us about this new option).

CONNECTIVITY

- **DOMUSCONNECT:** standard, free IoT connectivity.
- Remote technical service.
- Machine monitoring.
- Remote business management.

ERGONOMICS

- Large-diameter door - ideal for loading and unloading.
- Drum opens easily with push-button.
- Ergonomic height for easier loading.
- Loading height: door base 960 mm.

MAINTENANCE

Electric components on the left side, mechanical components on the right side and connections on the top (protected from water and detergents).

Technical menu: statistics, alarms, autotest, data recovery for technicians and maintenance.

OTHERS

2 opposed doors. Pass-through barrier washer. Ready to be connected to dosing pumps. Grey skinplate outer casing. Drum and vat in stainless steel AISI 304. Frequency inverter to control imbalance. CE approved product



OPTIONS


- License IoT - DOMUSCONNECT
- Weighing sensor system on feet for ASA-100. Includes kit with 6 extra dosing signals.
- 6 extra dosing signals card for automatic liquid dosing
- Titration valve
- End of cycle light alarm
- 4 compartment detergent box
- Stainless steel outer casing
- Stainless steel frame
- Screen and panels protector
- Maritime wooden packing for
- 230V 3~ 50/60Hz
- 440V 3~ 60Hz (marine)

| DRUM | UNIT. | ASA-100 TOUCH II | |
|----------------------------------|-------------------------|-----------------------|--------------|
| Load capacity 1:9 | Kg | 100 | |
| | lb | 220,5 | |
| Load capacity 1:10 | Kg | 90 | |
| | lb | 198,4 | |
| Volume | l | 900 | |
| | ft ³ | 31,78 | |
| Diameter | mm | 1.050 | |
| | inch | 41,3 | |
| Depth | mm | 1.032 | |
| | inch | 40,6 | |
| Drum compartments | Nº | 2 | |
| GENERAL DETAILS | | | |
| Washing speed | rpm | 45 | |
| Spining speed | rpm | 750 | |
| G Factor | - | 325 | |
| TOUCH II Control | - | 7" | |
| Double screen | - | STD | |
| Motor break | - | STD | |
| Double drainage | - | STD | |
| DOOR | | | |
| Drum opening dimensions | mm | 900 x 500 | |
| | inch | 35,4 x 19,6 | |
| Vat opening dimensions | mm | 960 x 700 | |
| | inch | 37,8 x 27,55 | |
| Height door bottom | mm | 960 | |
| | inch | 37,8 | |
| POWER | | | |
| Motor | kW | 15 | |
| Electric heating (elec. mod) | kW | 60 | |
| Total electric power (elec. mod) | kW | 75 | |
| Total electric power (steam mod) | kW | 15 | |
| CONNECTIONS | | E/DUAL | S |
| Tension 230V I + N + T 50/60Hz | Nº x mm ² /A | - | - |
| Tension 230V III + T 50/60Hz | Nº x mm ² /A | - | 4 x 10 / 40A |
| Tension 400V III + N + T 50/60Hz | Nº x mm ² /A | 5 x 25 / 120A | 5 x 6 / 25A |
| Water inlets number | - | 3 | |
| Water inlet | inch | 1" | |
| Water pressure | bar | 3 - 5 | |
| | psi | 43 - 72 | |
| Steam inlet (steam mod) | inch | 3/4" | |
| | bar | 4-8 | |
| Steam pressure | psi | 58-116 | |
| | bar | 4-8 | |
| Drain number | - | 2 | |
| Drain evacuation capacity | l/min | 2x200 | |
| | cfm | 2x5,65 | |
| Drain | inch | 3" | |
| OVERALL DIMENSIONS | | | |
| Net / Gross width | mm | 1.742 (1.894) / 1.890 | |
| | inch | 68,6 (74,6) / 74,4 | |
| Net / Gross depth | mm | 1.468 / 1.540 | |
| | inch | 57,8 / 60,6 | |
| Net / Gross height | mm | 1.982 / 2.150 | |
| | inch | 78 / 84,6 | |
| Net / Gross weight | kg | 1.900 / 1.958 | |
| | lb | 4.189 / 4.316,7 | |

| | | |
|--------|-----------------|------|
| Volume | m ³ | 6,26 |
| | ft ³ | 221 |

* Program No 2, 100 % load

** Measurement with the detergent option added

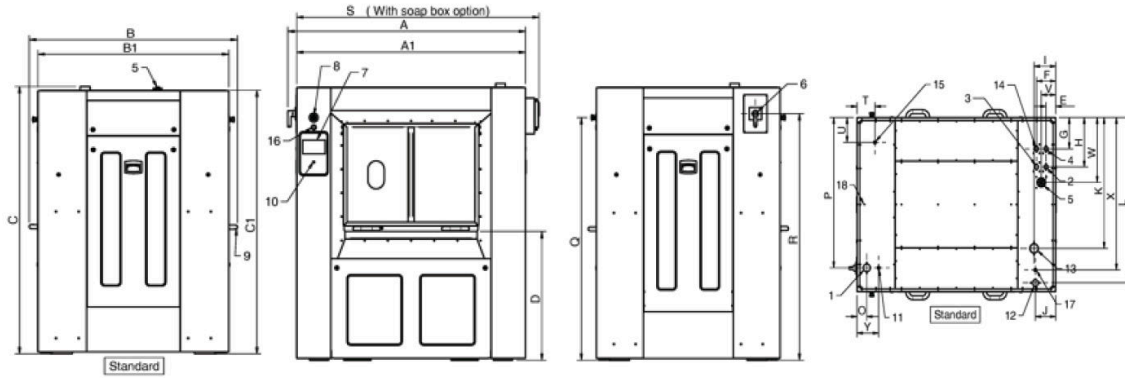

1. Electrical connexion
2. Cold water inlet
3. Soft water inlet
4. Hot water inlet
5. Liquid products inlet
6. Main switch
7. Control panel
8. Emergency stop
9. Door opening
10. USB port
11. Dosing pumps connexion
12. Steam inlet
13. Exhaust
14. Cold water for detergent box
15. Compressed air connection
16. Manual rotation
17. Compressed air steam valve
18. Ethernet port

| | A | B | C | A1 | B1 | C1 | D | E | F | G | H | I | J | K | L | O | P | Q | R | S | T | U | V | W | X | Y |
|---------|-------|-------|-------|-------|-------|-------|-----|----|-----|-----|-----|-----|-----|-------|-------|----|-------|-------|-------|-------|-----|-----|-----|-----|-------|-----|
| ASA-100 | 1.742 | 1.468 | 1.982 | 1.677 | 1.346 | 1.954 | 921 | 82 | 162 | 262 | 382 | 183 | 172 | 1.013 | 1.279 | 83 | 1.163 | 1.737 | 1.765 | 1.777 | 150 | 192 | 122 | 502 | 1.179 | 183 |