

 **FEATURES****TP-A (Without boiler)**

Vacuum ironing table + iron, with electrically heated board and suction.

Work table dimensions 1.200 x 400 x 250mm.

Adjustable temperature of the board by means of a thermostat.

Built-in single phase suction unit.

Works by means of a pedal.

Electric heated board.

Needs to be connected to an external steam supply.

Voltage: 230V I +N 50Hz.

**TPC-A / TPC-A PLUS (With boiler)**

Vacuum ironing table + iron with suction and electrically heated board, controlled by a thermostat.

Work table dimensions 1.200 x 400 x 250mm.

Built-in electric steam boiler. Iron included.

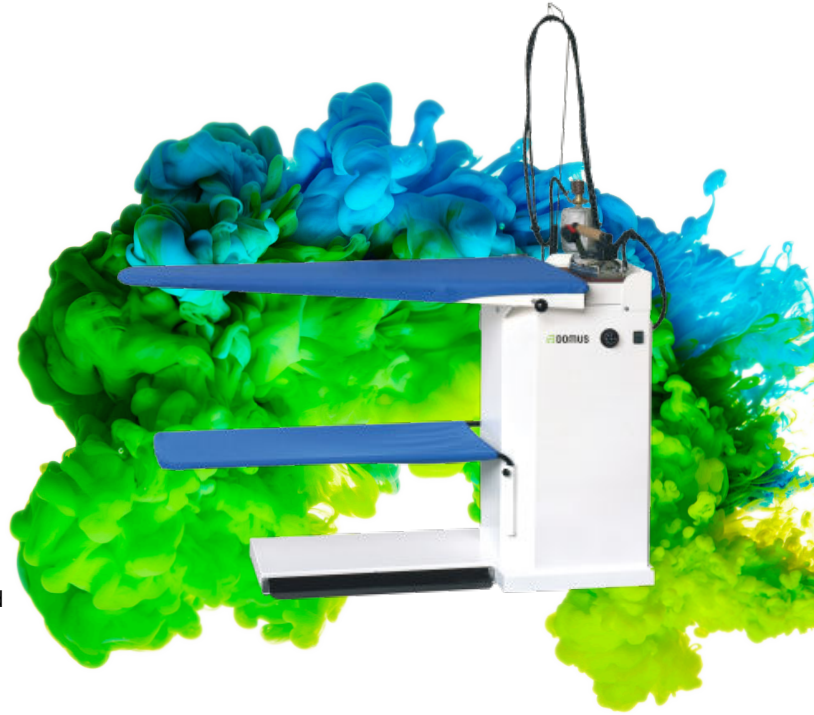
Automatic water feeding, automatic pressure control.

Feeding pump and emptying valve.

Works by means of a pedal.

Voltage: 400V III +N / 230V III / 230V I +N 50Hz.

**TPC-A PLUS:** Adjustable height of board from 750 to 950mm.

**OPTIONS**

- Sleeve arm for TP-A, TPC-A, TP-BA and TPC-BA
- Steam gun for TP-A, TPC-A, TP-BA and TPC-BA
- Sliding trolley with light TP-A, TPC-A, TP-VBA and TPC-VBA

CAPACITY	UNIT.	TP-A
		SIN CALDERA
Boiler	-	NO
Boiler capacity	L	-
Board dimensions	mm	1.200 x 400 x 250
Adjustable height of board	-	NO
<b>OPTIONS</b>		
Swinging arm with heated sleeve shape	-	OPT
Steam gun	-	OPT
Sliding trolley with balancer and lighting	-	OPT
Second steam iron assembly	-	NO
<b>POWER</b>		
Vacuum motor	kW	0,45
Pump motor	kW	-
Iron heater	kW	0,83
Board heater	kW	1
Boiler heater	kW	-
Sleeve-arm heater (option)	kW	0,09
<b>CONNECTIONS</b>		
Ø Water inlet	BSP	-
Ø Boiler exhaust (with boiler)	BSP	-
Ø Steam inlet	BSP	1/4"
Steam pressure	BAR	-
Steam Consumption	kg/h	5
Ø Air inlet	BSP	-
Air pressure	BAR	-
Air Consumption	NI/min	-
<b>DIMENSIONS / PACKING DIMENSIONS</b>		
Net width / Gross width	mm	1.480 / 1.520
Net depth / Gross depth	mm	480 / 580
Net height / Gross height	mm	930 / 1.120
Net weight / Gross weight	kg/h	66 / 82
Volume	m <sup>3</sup>	0,66 / 0,98
<b>OTHER</b>		
Voltage 50-60Hz	V/Hz	230V   50
Sound level	dB	68