DOMUS

WINNING THE FUTURE THROUGH INNOVATION

# PR-1018
# Wall Ironers Ø180

## ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.

## EFFICIENCY

Acoustic comfort: 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.

## ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.

## OUTSTANDING FEATURES


Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
Two available models:
- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.

## MAINTENANCE

Easy installation: requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.

## OTHERS


Front feed and return.
Roll ø 180 mm.
Working widths: 1.000mm and 1.200mm.
Electric heating.
CE certification

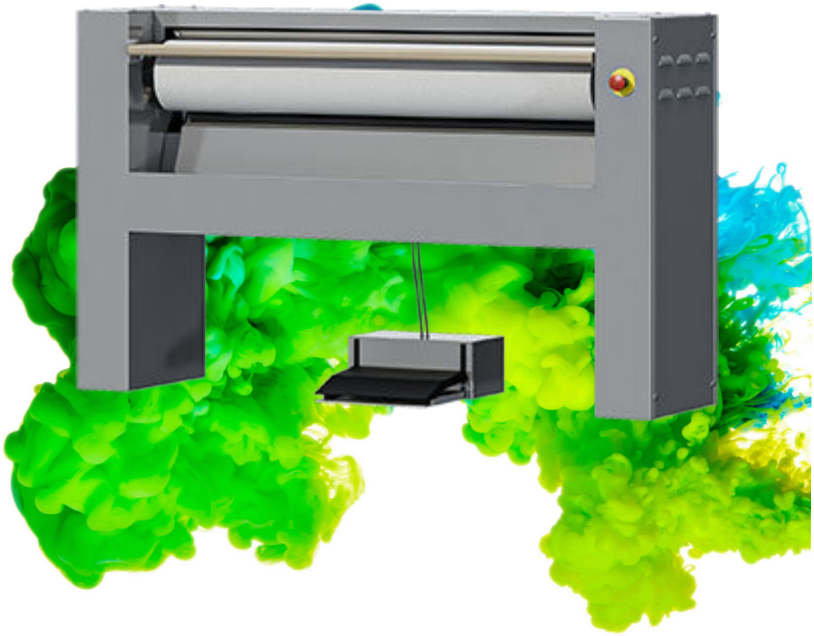

## OPTIONS

- Speed control (except ECO-ENERGY)
- 230V 1 + N 50Hz (except 250mm and ECO-ENERGY)
- 230V 1 + N 60Hz (except 250mm and ECO-ENERGY)
- 230V 3 + N + T 50Hz (250mm)

| GENERAL DETAILS | UNIT. | PR-1018 |
|---|---|---|
| Theorical production: 20-25 humidity | Kg/h | 15 |
| | Lb/h | 33,07 |
| Roll Ø | mm | 180 |
| | inch | 7,09 |
| Working width | mm | 1.000 |
| | inch | 39,37 |
| Working speed | m/min | 2.02 |
| | ft/mn | 6,62 |
| Electronic control | - | YES |
| Chest motion | - | Manual |
| **POWER** | | |
| Heating power | Kw | 3,30 |
| Roll motor power | Kw | 0,03 |
| Total electric power | Kw | 3,33 |
| **CONNEXIONS** | | |
| Tension 230 V I + N + T | nº x mm²/A | 3 x 4 / 16A |
| | n° x AWG/A | 3 x 11 / 16A |
| Tension 230 V III + T | nº x mm²/A | - |
| | n° x AWG/A | - |
| Tension 400 V III + N + T | nº x mm²/A | - |
| | n° x AWG/A | - |
| **DIMENSIONS** | | |
| Net / gross width | mm | 1.370 / 1.490 |
| | inch | 54 / 59 |
| Net / gross depth | mm | 438 / 540 |
| | inch | 17 / 21 |
| Net / gross height | mm | 952 / 1.130 |
| | inch | 37 / 44 |
| Net / gross weight | Kg | 80 / 100 |
| | Lb | 176 / 220 |
| Net / gross volume | m³ | 0,57 / 0,91 |
| | ft³ | 20,13 / 32,14 |
| **OTHERS** | | |
| No. Fume outlet | Nº | - |
| Ø Fume outlet | mm | - |
| | inch | - |
| Air flow | m³/h | - |
| | cfm | - |
| Noise Level | dB | 55 |

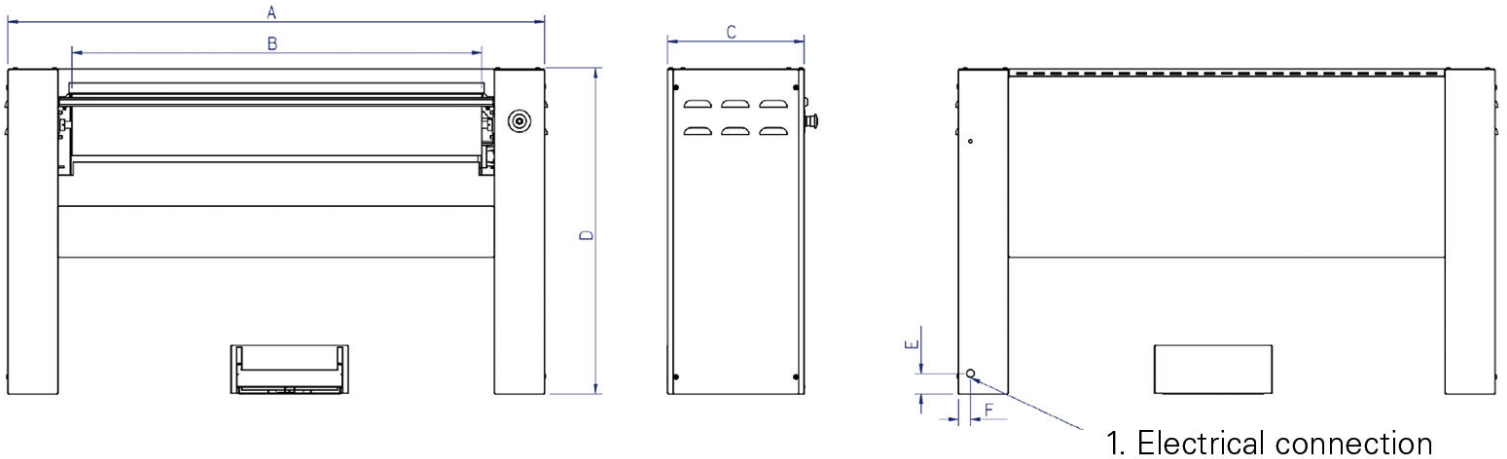


1. Electrical connection

| | A | B | C | D | E | F |
|---|---|---|---|---|---|---|
| PR-1018 | 1.694 | 1.447 | 689 | 1.354 | 68 | 785 |
| PR-1218 | 1.694 | 1.447 | 689 | 1.354 | 68 | 785 |