

## FEATURES

- In a space of just 18 m<sup>2</sup>, it dries and irons, folds and stacks linen.
  - Folding types: longitudinal and crosswise.
  - Can be operated by a single operator.
  - Maximum output up to 290 kg/h.\*
  - Adjustable ironing speed up to 18 m/min.\*
  - Maximum temperature: 165°C.
  - Automatic ironing speed control.
  - Automatic cooling of the ironing roller.
  - Available in one or two work lanes.
  - Intuitive and programmable 7" touchscreen. Optional mobile arm.
  - Fume extraction system with automatic fan cleaning.
  - Stackers can be added (optional).
  - Customisable with different accessories.
- Featured options:

### SALIDA LATERAL / Side exit



1 Apilador lat. compacto por palas  
Side standard stacker by blades



2 Apilador lat. Roll-Off (por arrastre)  
Side stacker Roll-Off

### SALIDA POSTERIOR / Rear exit



3 Recogedor post. + bypass (2/4 vías)  
Rear collector + bypass (2/4 lanes)



SMARTY  
Plegadora prend. pequeñas  
Small garment folder

\*Maximum production and speed, variable depending on model, configuration and working conditions.




## OPTIONS

- Compact side stacker by blades
- Roll-off side stacker
- Vacuum belts to help linen feeding
- Automatic 1 lane clamp feeder (needs option of vacuum feeding belts)
- By pass for rear exit
- Table for rear exit (H=860 mm. OPC bypass required)
- Four folding lanes (lengthfolds only)
- Rotating arm for the control panel
- 2 lanes rear collector small garments (it needs bypass option)
- Side output with table (without stacker) H=480 mm
- Side output with motorised table (without stacker) H=805 mm
- 4 lanes rear collector small garments (it needs bypass option)
- Double air pressure for thick linen
- Linen rejection system (dirty or torn)
- Remote service (SPE, SP, S)
- Maritime packaging SPE
- Maritime packaging for compact side stacker by blades
- Maritime packaging for Roll-off side stacker 1
- Maritime packaging for small pieces collector 2 lanes
- Maritime packaging for small pieces collector 4 lanes
- Different voltage from 400V 3~ +N 50 Hz

GENERAL DATA	UNIT.	SPE600-2-2600
Theoretical production elec/steam	Kg/h	75-105
Theoretical production gas heating*	Kg/h	75-105
Theoretical production radiant gas burner (+20%)*	Kg/h	90-126
Ø Roll	mm	600
Working width	mm	2.600
Height floor-feeding	mm	1.050
Working speed	m/min	3-12
Control type	-	Digital
No. of programs	Nº.	20
MAIN FUNCTIONS		
Drying	-	YES
Ironing	-	YES
Longitudinal folding	-	YES
Cross folding	-	YES
Lateral stacking (Roll-Off or compact stacker)	-	OPT
FOLDING		
1 lane - lengthfold	Nº.	1-2
1 lane - crossfold	Nº.	1-2-3
2 lanes - lengthfold	Nº.	1-2
2 lanes - crossfold	Nº.	1-2
4 lanes - lengthfold	Nº.	1-2
4+ lanes - folding	Nº.	NO
POWER		
Electric model - Consumption	A	78
Electric model - Heating power	kW	54
Electric model - Total electrical power	kW	57,1
Steam model - Consumption	Kg/h	95
Steam model - Power (max 12 bar)	kW	55
Steam model - Total electrical power	kW	3,1
Liquefied gas (LPG) model - Consumption	m³/h	2,5
Liquefied gas (LPG) model - Power	kW	67,4
Natural gas (NG) model - Consumption	m³/h	6,7
Natural gas (NG) model - Power	kW	63,3
Gas LPG / NG model - Total electrical power	kW	3,1
CONNECTIONS		
Ø Gas inlet	BSP	1"
Ø Steam inlet (12 bar max.)	BSP	1"
Ø Condensed (steam models)	BSP	1/2"
Ø Air inlet	mm	12
DIMENSIONS		
Net width / gross width	mm	3.740 / 3.900
Net depth / gross depth	mm	2.210 / 2.280
Net height / gross height	mm	2.040 / 1.970
Net weight / gross weight	Kg	2.686 / 3.050
Volume	m³	16,86 / 17,52
OTHERS		
Exhaust outlet	Nº	2
Exhaust outlet Ø	mm	120
Air extraction flow rate	m³/h	2 x 630
Air consumption (6.5 bar)	NI/h	15.000
Noise level	dB	<80

\* 50% residual moisture, 140gr/m² cotton, 100% roller utilization. Gas with atmospheric burner not available on 1000mm models.

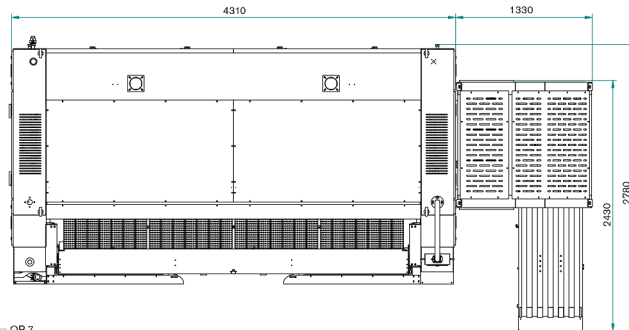

Standard:  
 ST 1 - Warning light  
 ST 2 - Emergency stop  
 ST 3 - Lifting eye bolts (crane)  
 ST 4 - Exhaust outlet connection

Options:  
 OP 1 - Swing arm  
 OP 2 - Vacuum feed belts  
 OP 3 - Feeder: clips  
 OP 31 - Feeder: alignment guides  
 OP 4 - Linen reject (button)  
 OP 5 - Roll-off side stacker (only SPE models)  
 OP 51 - Reset button  
 OP 52 - Conveyor belt  
 OP 6 - Small pieces back collector (2 or 4 lanes)  
 OP 7 - Compact side stacker (only SPE models)  
 OP 71 - Reset button  
 OP 72 - Conveyor belt

