DOMUS

WINNING THE FUTURE THROUGH INNOVATION

PR-1018 NOMEX
Wall Ironers Ø180

ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.

EFFICIENCY

Acoustic comfort: 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.

ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.

OUTSTANDING FEATURES


Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.
Two available models:
- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.

MAINTENANCE

Easy installation: requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.

OTHERS


Front feed and return.
Roll ø 180 mm.
Working widths: 1.000mm and 1.200mm.
Electric heating.
CE certification

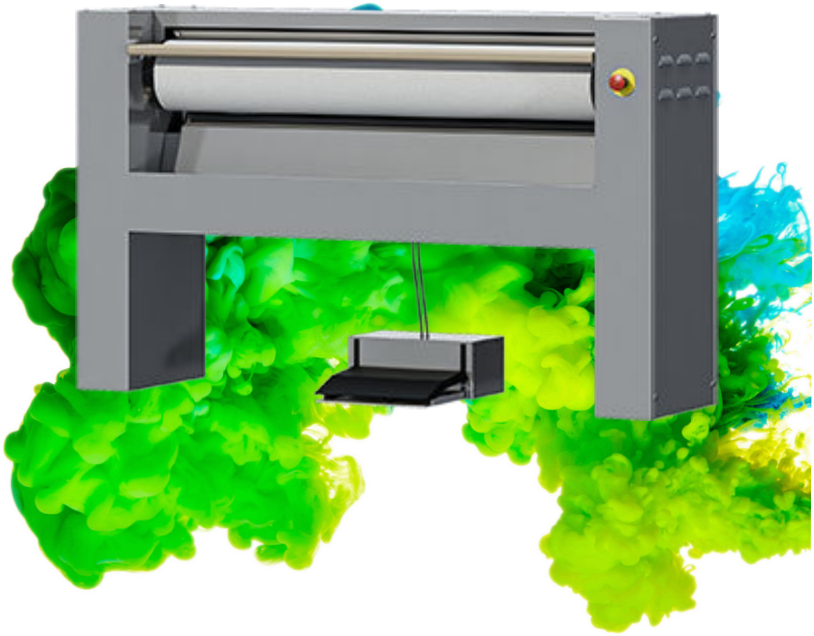

OPTIONS

- Speed control (except ECO-ENERGY)
- 230V 1 + N 50Hz (except 250mm and ECO-ENERGY)
- 230V 1 + N 60Hz (except 250mm and ECO-ENERGY)
- 230V 3 + N + T 50Hz (250mm)

GENERAL DETAILS	UNIT.	PR-1018 NOMEX
Theorical production: 20-25 humidity	Kg/h	15
	Lb/h	33,07
Roll Ø	mm	180
	inch	7,09
Working width	mm	1.000
	inch	39,37
Working speed	m/min	2.02
	ft/mn	6,62
Electronic control	-	YES
Chest motion	-	Manual
POWER		
Heating power	Kw	3,30
Roll motor power	Kw	0,03
Total electric power	Kw	3,33
CONNEXIONS		
Tension 230 V I + N + T	nº x mm²/A	3 x 4 / 16A
	n° x AWG/A	3 x 11 / 16A
Tension 230 V III + T	nº x mm²/A	-
	n° x AWG/A	-
Tension 400 V III + N + T	nº x mm²/A	-
	n° x AWG/A	-
DIMENSIONS		
Net / gross width	mm	1.370 / 1.490
	inch	54 / 59
Net / gross depth	mm	438 / 540
	inch	17,24 / 21,26
Net / gross height	mm	952 / 1.130
	inch	37,48 / 44,49
Net / gross weight	Kg	80 / 100
	Lb	176,37 / 220,46
Net / gross volume	m³	0,57 / 0,91
	ft³	20,13 / 32,14
OTHERS		
No. Fume outlet	Nº	-
Ø Fume outlet	mm	-
	inch	-
Air flow	m³/h	-
	cfm	-
Noise Level	dB	55

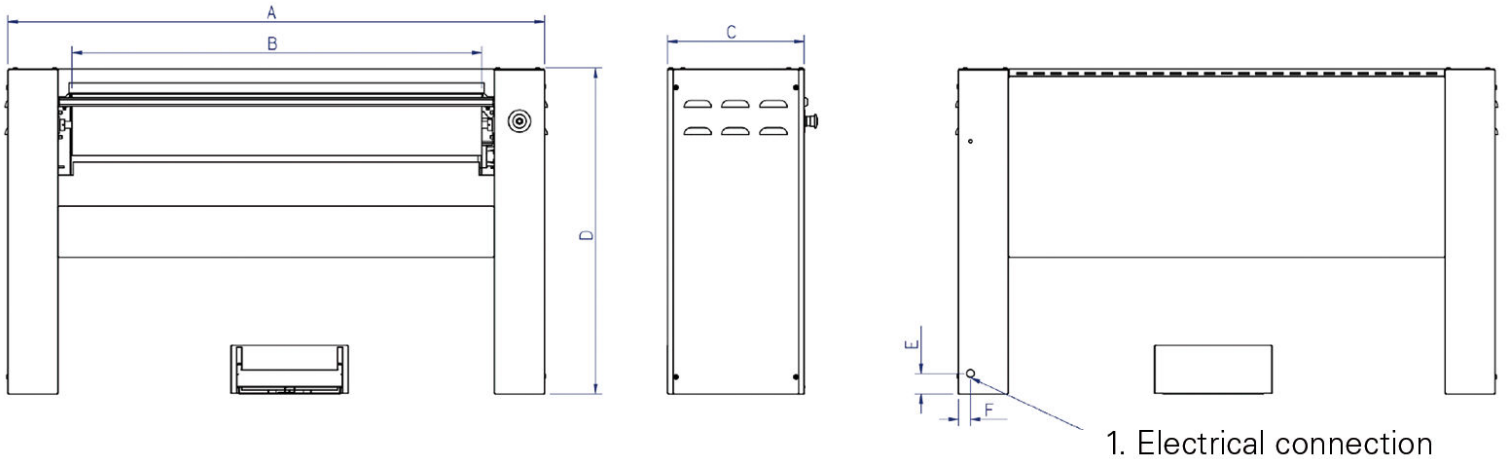

1. Electrical connection

	A	B	C	D	E	F
PR-1018 NOMEX	1.694	1.447	689	1.354	68	785
PR-1218 NOMEX	1.694	1.447	689	1.354	68	785