



### ELECTRONIC CONTROL

Selection between 4 temperatures.  
Preset ironing speeds, not adjustable.  
No display.



### EFFICIENCY

Acoustic comfort: 50-60 dB max.  
Minimum space requirement: space saving, suitable for small spaces.  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.



### ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).  
Panels in grey Skinplate and stainless steel.  
Wooden feeding board.  
Industrial components, more durable.



### OUTSTANDING FEATURES

Large roll contact area with the linen.  
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.

Two available models:

- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.




### MAINTENANCE

Easy installation: requires only an electrical connection.  
Easy access on both sides for maintenance.  
Quick and easy dismantling of bearings.



### OTHERS


Front feed and return.  
Roll ø 180 mm.  
Working widths: 1.000mm and 1.200mm.  
Electric heating.  
CE certification

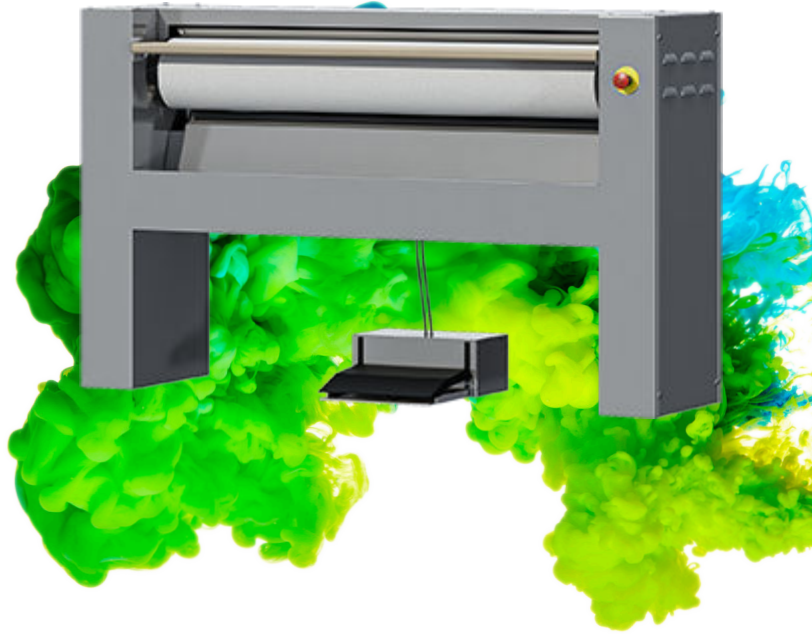

### OPTIONS

- Speed control (except ECO-ENERGY)
- 230V 1 + N 50Hz (except 250mm and ECO-ENERGY)
- 230V 1 + N 60Hz (except 250mm and ECO-ENERGY)
- 230V 3 + N + T 50Hz (250mm)

GENERAL DETAILS		UNIT.	PR-1018 NOMEX
Theoretical production: 20-25 humidity		Kg/h	15
		Lb/h	33,07
Roll Ø		mm	180
		inch	7,09
Working width		mm	1.000
		inch	39,37
Working speed		m/min	2.02
		ft/mn	6,62
Electronic control		-	YES
Chest motion		-	Manual
POWER			
Heating power		Kw	3,30
Roll motor power		Kw	0,03
Total electric power		Kw	3,33
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	3 x 4 / 16A
		nº x AWG/A	3 x 11 / 16A
Tension 230 V III + T		nº x mm²/A	-
		nº x AWG/A	-
Tension 400 V III + N + T		nº x mm²/A	-
		nº x AWG/A	-
DIMENSIONS			
Net / gross width		mm	1.370 / 1.490
		inch	54 / 59
Net / gross depth		mm	438 / 540
		inch	17,24 / 21,26
Net / gross height		mm	952 / 1.130
		inch	37,48 / 44,49
Net / gross weight		Kg	80 / 100
		Lb	176,37 / 220,46
Net / gross volume		m³	0,57 / 0,91
		ft³	20,13 / 32,14
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55

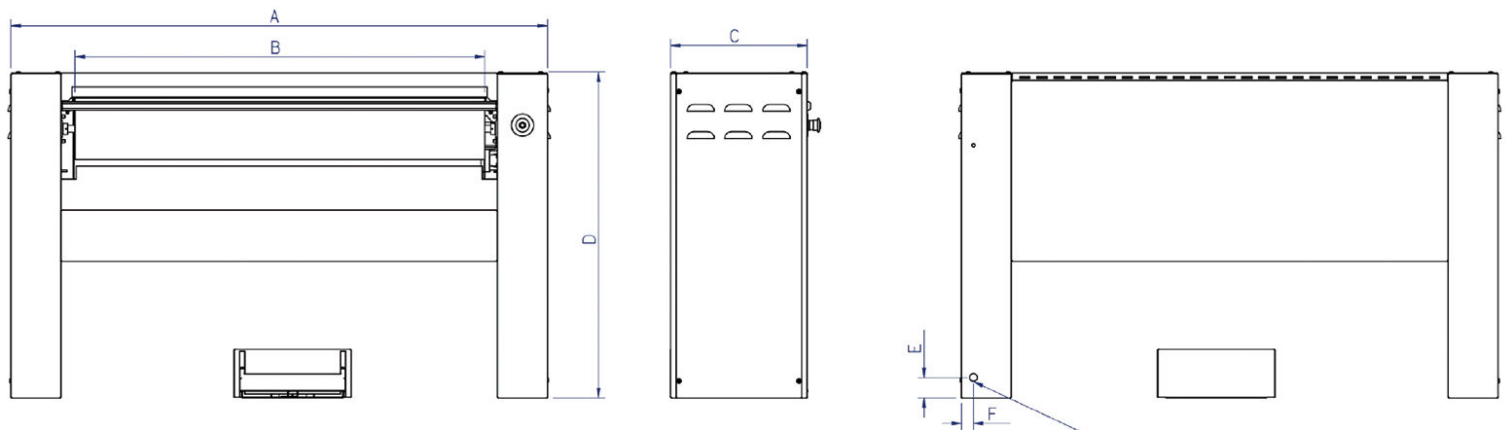

1. Electrical connection

	A	B	C	D	E	F
PR-1018 NOMEX	1.694	1.447	689	1.354	68	785
PR-1218 NOMEX	1.694	1.447	689	1.354	68	785