DOMUS

WINNING THE FUTURE THROUGH INNOVATION

WREC-150 T2

ECOTANK - Water recovery tank

OUTSTANDING FEATURES

80 and 150 litre tanks to save a large amount of water in small spaces.

In column: each washer or barrier can have 1, 2 or 3 tanks in column.

Resistant: Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.

Interior with rounded corners design to prevent dirt accumulation and facilitate cleaning.

ECOTANK tanks are the ideal solution for optimising water consumption in your laundry.

Perfect for businesses with limited space and smaller machines.



EFFICIENCY

We saves water: thanks to the reuse of water at different stages of the washing and rinsing process.
We saves energy: by reducing the demand for conventional pumping and pressure systems, processes that require a considerable amount of energy.
We saves chemicals: by optimising the use of water in different phases of the wash, ECOTANKS reduce the need for chemicals to treat the water, taking advantage of its purity in each cycle.

EASY MAINTENANCE

Plug and play: Easy to connect and install to washing machines with TOUCH II control.
2 water level sensors in each ECOTANK.
Self-cleaning tanks with pre-set programmes (with TOUCH II equipped washers).
Removable tanks for easy cleaning and maintenance.

OTHERS

Grey skinplate panels.
High density polyethylene tanks.
2 water level sensors in each tank.


MACHINES THAT CAN BE CONNECTED TO ECOTANK
80l. tanks for:
• 11 to 18kg washers
• 16kg barriers

150l. tanks for:
• 22 to 28kg washers
• 22kg barriers

OPTIONS

• Kit ready for ECOTANK XL conn. 3/4" for barriers ASM-16
• Kit ready for ECOTANK XL conn. 3/4" for barriers ASM-22
• Kit ready for ECOTANK XL conn. 3/4" for washers DLS/DHS-11/14/18/22/28

WATER RECOVERY TANK	UNIT.	WREC-150 T2
Tanks capacity	l	150x2
Front-load washing machine capacity	Kg	27, 35
Front-load washing machine barrier	Kg	27, 35
Outdoor furniture	-	skinplate
CONNECTIONS		
Water inlet	inch	3/4"
Water outlet	inch	3/4"
Ø Steam exhaust	mm	21
Ø Overflow / Drain	mm	21
Voltage	V	230V I
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	551 / 570
Net depth / Gross depth	mm	1.273 / 1.350
Net height / Gross height	mm	1.023 / 1.425
Net weight / Gross weight	Kg	102 / 131
Volume	m³	1,1

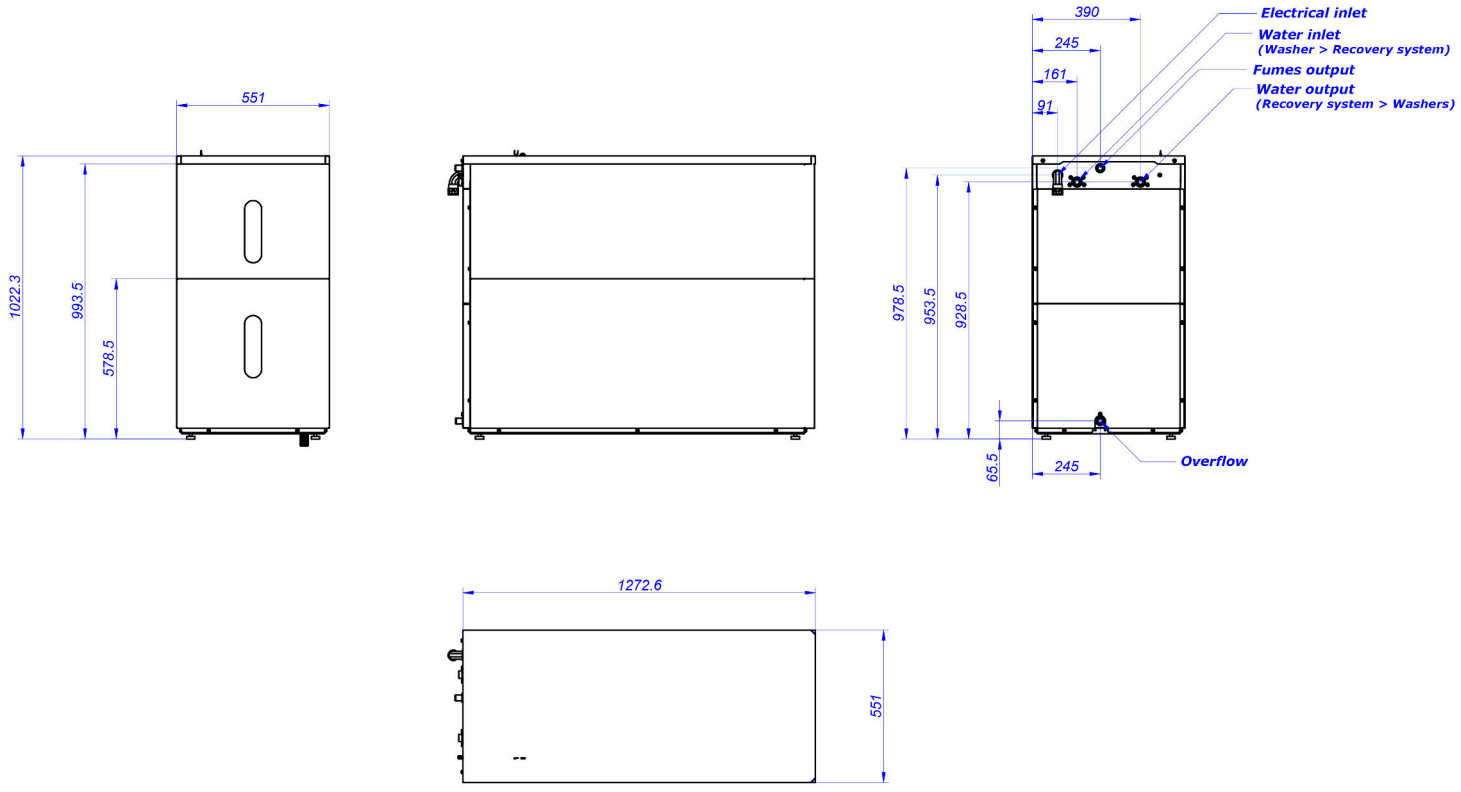

	A	B	C	D	E	F	G	H	I	J	K	L
WREC-150 T2	1022,3	551	1272,6	65,5	928,5	953,5	978,5	245	390	245	161	91