

 **FEATURES****SB-2**

Electric steam boiler with steam iron.
Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kW.
Manually operated water feeding (drinking water required for its functioning).
Automatic pressure control by thermostat with fixed setting.
Mobile trolley as option.
Voltage: 230V I +N 50-60Hz.

SB-5

Stainless steel electric steam boiler with electric steam iron.
Boiler capacity 5 liters, heater 1,45 kW.
Water level indicator with warning light for empty boiler.
Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
Manual water feed.
Mobile trolley as option.
Voltage: 230V I +N 50Hz.

SB-24

Electric and automatic steam boiler SB-24 to supply steam to models without boiler. Available from 12 to 22 kW.
Water feed can be connected directly to the water mains or to a condensate tank. Pressure between 1 and 7 bar.
Capacity 24,9 litres.
Voltage: 230/400V III 50-60Hz.

TCC


Folding ironing table with electrically heated board and built in suction unit.
Without steam iron, without built-in boiler.
Board dimensions: 1.380 x 380 x 930 mm.

**OPTIONS**

- Stainless steel condensate recovery tank 45L
- Stainless steel condensate recovery tank 83L

GENERAL DETAILS	UNIT.	SB-24
Boiler capacity	L	24,9
Steam pressure	Bar	0,3 - 7
Working temperature	°C	+5 ÷ +80
Working humidity	-	90% max
Boiler Heater	kW	-
Iron Heater	kW	-
Resistance table	W	-
Suction motor	W	-
POWER		
Boiler heaters	kW	12- 22
Steam production	Kg/h	16 - 29,7
Pump motor power	HP	0,5
CONNECTIONS		
Water feeding inlet	in	1/2"
Boiler exhaust	in	1/2"
Steam inlet	in	1/2"
Condensate return with valve	in	1/2"
Autonomy	-	-
Operating pressure	BAR	-
DIMENSIONS		
Dimensions*	mm	580 x 660 x 780
Height with wheel stand mounted (option)	mm	-
Net weight	Kg	85
Gross weight	Kg	111
Packing dimensions	mm	880 x 730 x 1.050
Working dimensions	-	-
Voltage	V/Hz	230/400V III 50-60
Sound level	dB	<70

* Dimensions une fois assemblé

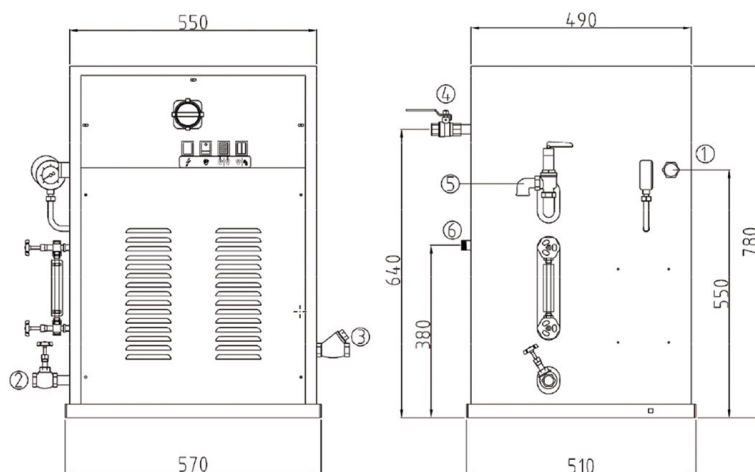

1. PG21 power supply inlet
2. Boiler exhaust
3. Water feeding inlet
4. Steam inlet
5. Safety valve
6. Condensate return with valve