

FEATURES

B-2 - Steam generator with iron

- Electric steam generator with 1.8-litre capacity (1 kW), with iron.
- Compact, thermally insulated, with aluminium alloy boiler and manual water filling.
- Voltage: 230 V 1 ~ 50/60 Hz.

SB-5 - Steam generator with iron.

- Stainless steel electric steam generator, supplied with a steam iron.
- Water level indicator with warning light when the generator is empty.
- Three safety devices: pressure switch, safety valve and emergency thermostat.
- Requires water supply for operation.
- Fixed thermostat to control pressure. Trolley with wheels optional.
- Voltage: 230 V 1 +N 50 Hz.

SB-24 - Steam generators for supplying finishing equipment without a boiler.


- Available from 12 to 22 kW.
- Water supply can be connected directly to the mains or to a stainless steel condensate tank.
- Pressure between 1 and 7 bar.
- Capacity: 24.9 litres.
- Voltage: 230 V 3 / 400 V 3 50/60 Hz.



OPTIONS

- Stainless steel condensate recovery tank 45 lt SB24-12 kw
- Stainless steel condensate recovery tank 83 lt SB24-22 kw

GENERAL DATA	UNIT.	SB-24
Power supply	V	230/400 V 3 50 Hz
Boiler energy consumption	W	12.000 / 24.000
Iron energy consumption	W	-
Boiler capacity	L	24
Autonomy	h	-
Maximum steam pressure	bar	7
Sound pressure level	dB	<70
Operating temperature	°C	5 - 80 °C
Operating humidity	%	90
Storage temperature: -20 to +50 °C	°C	-20 / +50
DIMENSIONS		
Net width	mm	580
Net depth	mm	660
Net height (without pole)	mm	765
Net weight	kg	85
Gross width	mm	780
Net depth	mm	680
Gross height	mm	990
Gross weight	kg	111

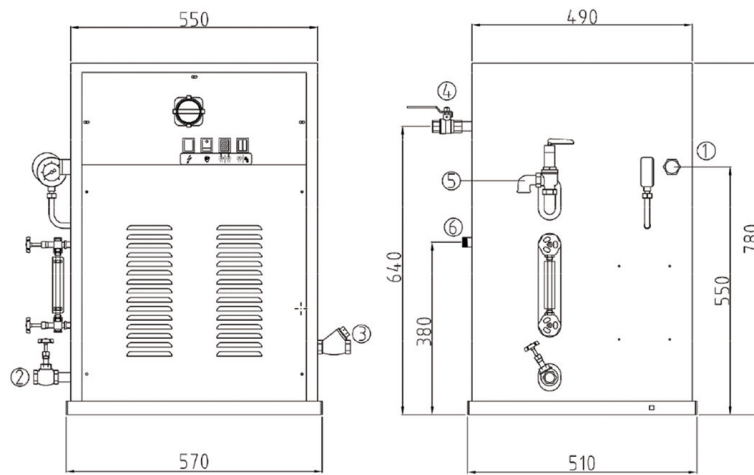

1. PG21 power supply inlet
2. Boiler exhaust
3. Water feeding inlet
4. Steam inlet
5. Safety valve
6. Condensate return with valve