

 **ELECTRONIC PROGRAMMER**

M programmer: push buttons to control temperature and time.

 **OUTSTANDING FEATURES**

Reversing drum action as standard.
Galvanised steel drum.
Frequency inverter as standard.

 **EFFICIENCY**

Big fluff filter.

 **VERSATILITY**

Make to order - customisation.
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.

 **ERGONOMICS**

Biggest door diameters.
Opening sense of door adjustable on site.

 **MAINTENANCE**

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).
Easy to access to components.

 **OTHERS**

White painted panels.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas.
CE approved




OPTIONS

- Opposite door opening
- Back panel with air filter
- Maritime wooden packing DLM-11
- M programmer display
- 230V III 50Hz DLM-11/14/18 E
- 400V III 60Hz DLM-11/14/18/22/28/35
- 230V III 60Hz DLM-11/14/18 E
- 230V III 60Hz DLM-11 to DLM-35 G/S
- 230V I 50Hz DLM-11 E
- 440/480V III 60Hz DLM-11/14/18
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DLM-11	
Capacity 1/18		Kg	11,7	
		lb	25,7	
Capacity 1/20		Kg	10,5	
		lb	23,1	
Ø Drum		mm	750	
		inch	29,53	
Drum length		mm	475	
		inch	18,70	
Drum volume		l	210	
		cu ft	7,41	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	976	
		inch	38,43	
Height from floor to bottom of door		mm	618	
		inch	24,33	
ELECTRIC HEATING				
Evaporation capacity		L/h	9,3	
		US gallon/h	2,46	
Hourly output		Kg/h	20,3	
		lb/h	44,8	
Installed heating power		kW	12	
Installed electrical power		kW	12,67	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	14,5	
		US gallon/h	3,830	
Hourly output (gas model)		Kg/h	28,6	
		lb/h	63,1	
Installed gas heating power		kcal/h	17638	
		Btu/h	70000	
Installed gas heating power		kW	20,51	
Installed electrical power		kW	0,67	
Instant propane gas consumption (G31)		Kg/h	1,76	
		lb/h	3,88	
Instant natural gas consumption (G20)		m ³ /h	2,17	
		cfm	1,28	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,25	
Nominal air flow rate		m ³ /h	850	
		cfm	500,29	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	1,2	
		Btu/h	4097,0	
Max. front heat emission		kW	0,84	
		Btu/h	2867,9	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm ² / A	3 x 25 / 63A	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 10 / 40A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 4 / 25A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30,91 / 34,06	

Net / gross depth	mm	855 / 940
	inch	33,66 / 37,01
Net / gross height	mm	1.694 / 1.840
	inch	66,69 / 72,44
Net / gross weight	Kg	172 / 180
	lb	379,20 / 396,83
OTHERS		
Sound level	dB	64

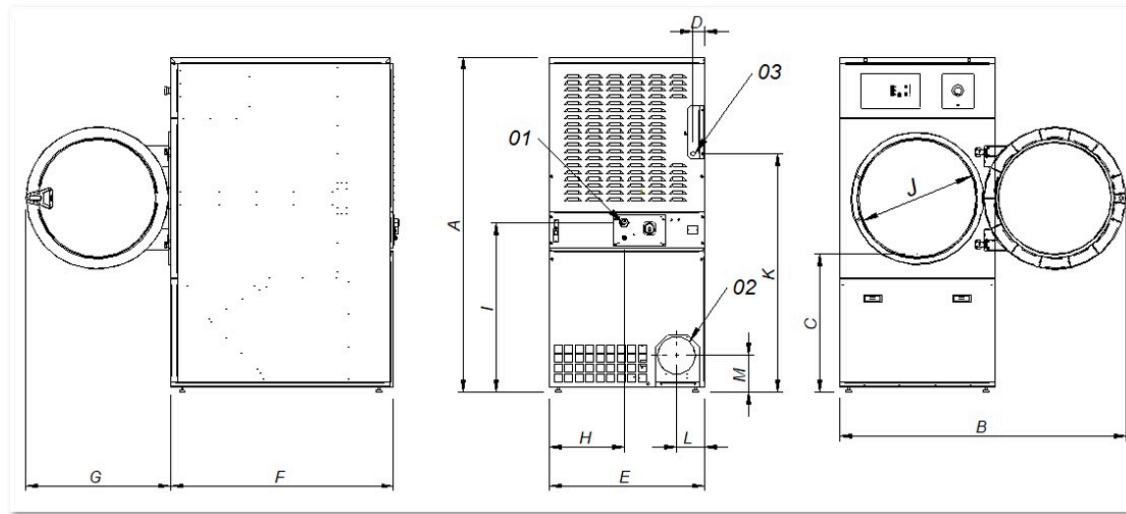

01 Power supply
02 Fumes output Ø 200
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-11	1.694	1.447	689	68	785	855	735	380	870	575	1.226	133	180
DLM-14	1.694	1.447	689	68	785	989	735	380	870	575	1.226	133	180