

## TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.  
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
Videos show on display: ads, instructions, (useful for coin laundry).  
37 languages.

## OUTSTANDING FEATURES

Reversing drum action as standard.  
Stainless steel drum as standard.  
Frequency inverter as standard.

## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.  
Big fluff filter.

## VERSATILITY

Make to order - customisation.  
Wet Cleaning.  
OPL > Self-service - Standard OPL model easily trasformable to coin laundry uses.

## CONNECTIVITY

IoT- **DOMUSCONNECT** standard.  
Management of laundries: OPL and COIN.  
Remote payment (coin-laundry).

## ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
Biggest door diameters.

## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians.

## OTHERS

Grey skinplate outer casing, stainless steel look.  
SOFT DRY - new drum with stamped holes.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric or gas, except DTT2-22 XP only gas.  
CE approved



## OPTIONS

- 400V 3~60Hz 11/14/18/22 XP
- CP KIT CENTRAL PAY STACK
- License IoT - DOMUSCONNECT
- EFFICIENT DRY - Humidity sensor for DTT2 (order 1 unit per column)
- Double doorglass (order 1 unit per column)
- Fire extinguisher SFEX STACK (order 1 unit per column)
- Tropicalized model (order 1 unit per column)
- Opposite door opening (order 1 unit per column)
- Dosing-spraying (1 unit x column)
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm)
- Front and side panels in AISI 304 stainless steel AISI 304 DTT2-22 XP
- Back panel with air filter (STACK)
- Front panel in AISI 304 stainless steel AISI 304 DTT2-22 XP
- Maritime wooden packing DTT2-22 XP
- 400V 3~ 50 Hz 11/14/18/22 XP
- 400V 3N 60 Hz 11/14/18/22 XP
- 230V 3~ 60 Hz 11/14/18/22 G XP
- 440/480V 3~ 60 Hz 11/14/18/22 XP (marine)
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DTT2-22 XP	
Capacity 1/18		Kg	24,3 x 2	
		lb	53,5 x 2	
Capacity 1/20		Kg	21,9 x 2	
		lb	48,3 x 2	
Ø Drum		mm	835	
		inch	32,9	
Drum length		mm	800	
		inch	31,50	
Drum volume		l	440	
		cu ft	15,54	
Ø Door hole		mm	575	
		inch	22,6	
Door center height		mm	574 / 1618	
		inch	22,60/63,70	
Height from floor to bottom of door		mm	214 / 1258	
		inch	8,46/49,53	
ELECTRIC HEATING				
Evaporation capacity		L/h *	-	
		US gallon/h *	-	
Hourly output		Kg/h **	-	
		lb/h **	-	
Installed heating power		kW	-	
Installed electrical power		kW	-	
Drum motor power		kW	0,37 x 2	
GAS HEATING				
Evaporation capacity (gas model)		L/h	22 x 2	
		US gallon/h	5,81 x 2	
Hourly output (gas model)		Kg/h	44 x 2	
		lb/h	97 x 2	
Installed gas heating power		kcal/h ***	26139 x 2	
		Btu/h ***	103798 x 2	
		kW ***	30,4 x 2	
Installed electrical power		kW	1,94	
Consumption of propane gas average (G31)		Kg/h	2,08 x 2	
		lb/h	4,60 x 2	
Instant natural gas consumption (G20)		m³/h	3,22 x 2	
		cfm	1,89 x 2	
Ø Gas inlet		BSPP ISO 228-1	3/4"	
VENTILATION				
Fan motor power		kW	0,55 x 2	
Nominal air flow rate		m³/h	900 x 2	
		cfm	529,72 x 2	
Ø Fume exhaust		mm	250	
		inch	9,84	
HEAT EMISSION				
Maximum total heat emission 10-8% (9-7%)		kW	5	
		Btu/h	16934	
Max. front heat emission 7-5% (4-2%)		kW	1,9	
		Btu/h	6350	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm² / A	-	3 x 2,5 / 20
Tension 230V - III + T		Nº x mm² / A	-	3 x 2,5 / 20 (5*)
Tension 400V - III + N + T		Nº x mm² / A	-	3 x 2,5 / 20 (6*)
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	870 / 950	
		inch	34,3 / 37,4	

Net / gross depth	mm	1312 / 1395
	inch	51,7 / 54,9
Net / gross height	mm	2118 / 2250
	inch	83,4 / 88,6
Net / gross weight	Kg	374 / 389
	lb	823 / 856
<b>OTHERS</b>		
Max. sound level (at 1m in front)	dB	69


\* Drying conditions: full load (1/20) of towels, drying temperature 90°C.

\*\* Kg dry linen per hour. Drying conditions: full load (1/20) of towels, drying temperature 90°C.

\*\*\* Calculation of thermal power from PCI.

(5\*) Connect 2 phases and earth.

(6\*) Connect phase, neutral and earth.

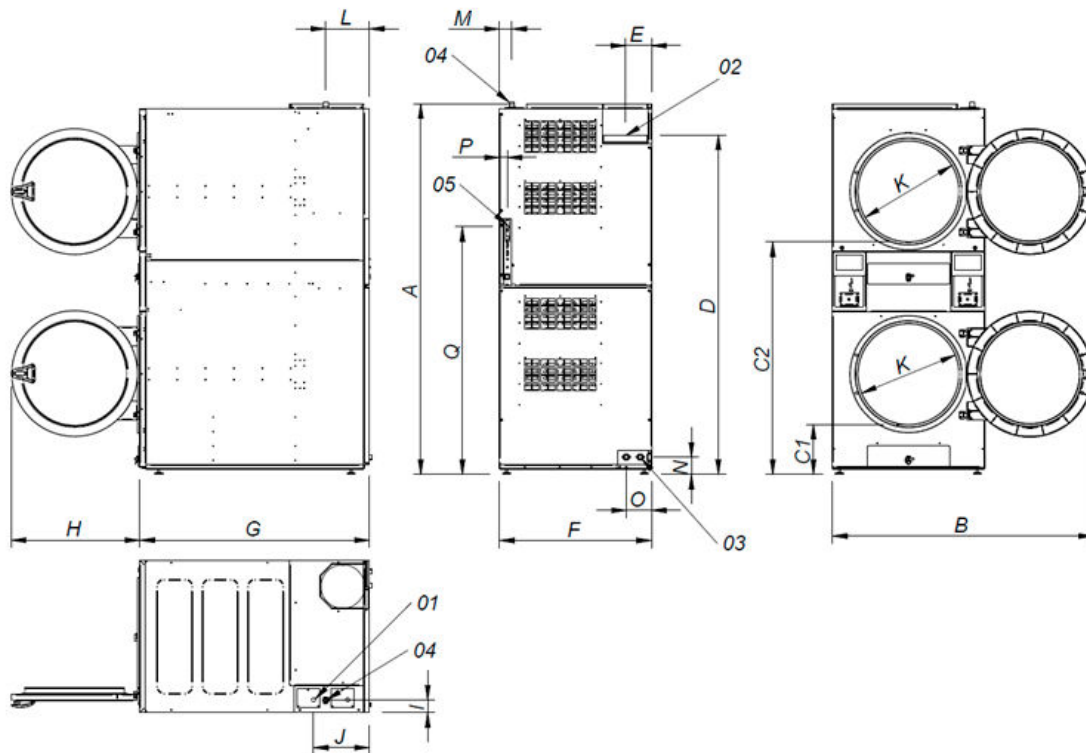

- 01. Power supply
- 02. Fumes output Ø250
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 3/4"
- 05. Ethernet connection (only touch control)

		A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
DTT2-22 XP	mm	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	100	145	45	1416