

 **FEATURES****B-2 - Steam generator with iron**


- Electric steam generator with 1.8-litre capacity (1 kW), with iron.
- Compact, thermally insulated, with aluminium alloy boiler and manual water filling.
- Voltage: 230 V 1 ~ 50/60 Hz.

**B-5 - Steam generator with iron.**

- Stainless steel electric steam generator, supplied with a steam iron.
- Water level indicator with warning light when the generator is empty.
- Three safety devices: pressure switch, safety valve and emergency thermostat.
- Requires water supply for operation.
- Fixed thermostat to control pressure. Trolley with wheels optional.
- Voltage: 230 V 1 +N 50 Hz.


**SB-24 - Steam generators for supplying finishing equipment without a boiler.**

- Available from 12 to 22 kW.
- Water supply can be connected directly to the mains or to a stainless steel condensate tank.
- Pressure between 1 and 7 bar.
- Capacity: 24.9 litres.
- Voltage: 230 V 3 / 400 V 3 50/60 Hz.

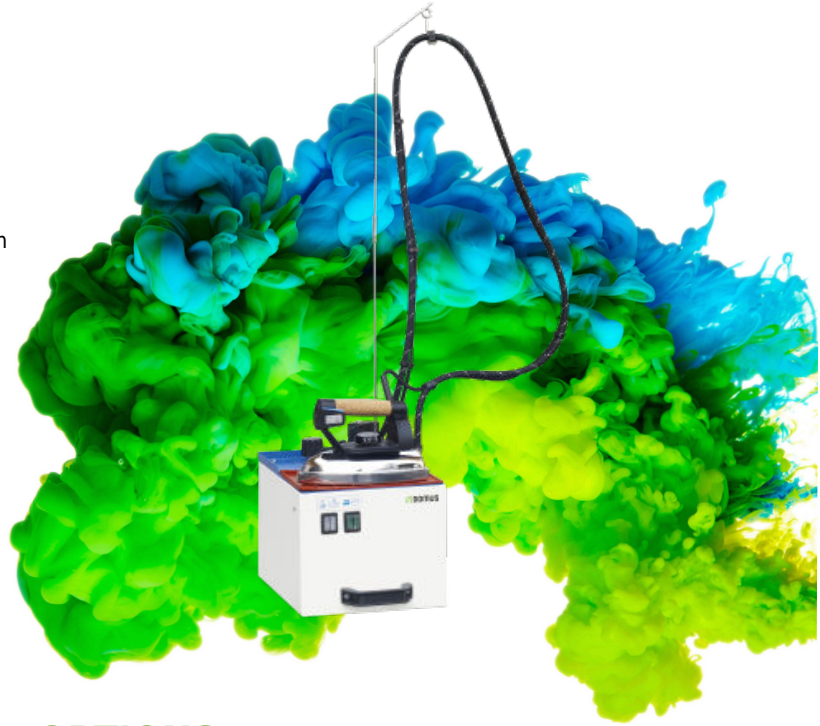**OPTIONS**

- Wheels support for SB-5

GENERAL DATA	UNIT.	B-5
Power supply	V	230V/ 1 / 50-60 Hz
Boiler energy consumption	W	1450
Iron energy consumption	W	800
Boiler capacity	L	5
Autonomy	h	5-6
Maximum steam pressure	bar	2,8
Sound pressure level	dB	<70
Operating temperature	°C	5 - 80 °C
Operating humidity	%	90
Storage temperature: -20 to +50 °C	°C	-20 / +50
DIMENSIONS		
Net width	mm	270
Net depth	mm	380
Net height (without pole)	mm	110
Net weight	kg	11
Gross width	mm	400
Net depth	mm	300
Gross height	mm	400
Gross weight	kg	12

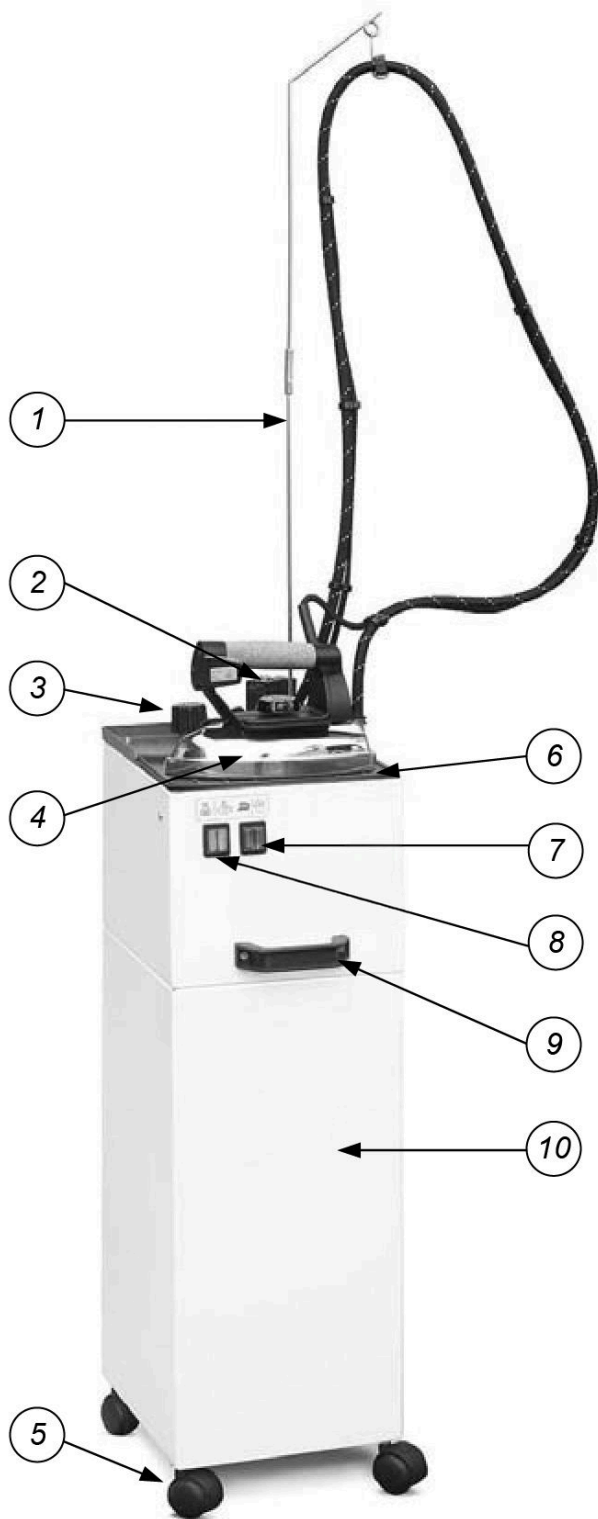

- 1. Iron support tube (antenna)
- 2. Steam solenoid valve
- 3. Filling and safety cap
- 4. Iron
- 5. Swivel wheels
- 6. Silicone iron rest
- 7. Boiler and iron switch
- 8. Indicator lights
- 9. Handle
- 10. Complete trolley (optional)