

 **FEATURES****SB-2**

Electric steam boiler with steam iron.  
Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kW.  
Manually operated water feeding (drinking water required for its functioning).  
Automatic pressure control by thermostat with fixed setting.  
Mobile trolley as option.  
Voltage: 230V I +N 50-60Hz.

**SB-5**

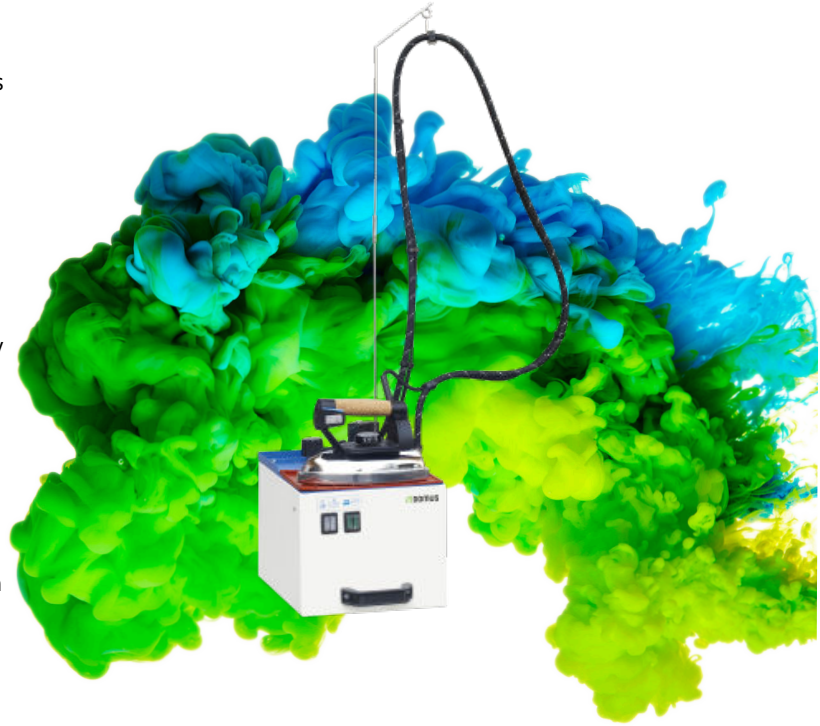
Stainless steel electric steam boiler with electric steam iron.  
Boiler capacity 5 liters, heater 1,45 kW.  
Water level indicator with warning light for empty boiler.  
Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.  
Manual water feed.  
Mobile trolley as option.  
Voltage: 230V I +N 50Hz.

**SB-24**

Electric and automatic steam boiler SB-24 to supply steam to models without boiler. Available from 12 to 22 kW.  
Water feed can be connected directly to the water mains or to a condensate tank. Pressure between 1 and 7 bar.  
Capacity 24,9 litres.  
Voltage: 230/400V III 50-60Hz.

**TCC**

Folding ironing table with electrically heated board and built in suction unit.  
Without steam iron, without built-in boiler.  
Board dimensions: 1.380 x 380 x 930 mm.

**OPTIONS**

- Wheels support

| GENERAL DETAILS                          | UNIT. | SB-5              |
|------------------------------------------|-------|-------------------|
| Boiler capacity                          | L     | 5,0               |
| Steam pressure                           | Bar   | -                 |
| Working temperature                      | °C    | -                 |
| Working humidity                         | -     | -                 |
| Boiler Heater                            | kW    | 1,45              |
| Iron Heater                              | kW    | 0,80              |
| Resistance table                         | W     | -                 |
| Suction motor                            | W     | -                 |
| POWER                                    |       |                   |
| Boiler heaters                           | kW    | -                 |
| Steam production                         | Kg/h  | -                 |
| Pump motor power                         | HP    | -                 |
| CONNECTIONS                              |       |                   |
| Water feeding inlet                      | in    | -                 |
| Boiler exhaust                           | in    | -                 |
| Steam inlet                              | in    | -                 |
| Condensate return with valve             | in    | -                 |
| Autonomy                                 | -     | 5/6               |
| Operating pressure                       | BAR   | 2,8               |
| DIMENSIONS                               |       |                   |
| Dimensions*                              | mm    | 262 x 397 x 1.090 |
| Height with wheel stand mounted (option) | mm    | 1.580             |
| Net weight                               | Kg    | 11                |
| Gross weight                             | Kg    | 15                |
| Packing dimensions                       | mm    | 600 x 450 x 540   |
| Working dimensions                       | -     | -                 |
| Voltage                                  | V/Hz  | 230V   50         |
| Sound level                              | dB    | -                 |

\* Dimensions une fois assemblé