

FEATURES

SB-2

Electric steam boiler with steam iron.
Die-cast aluminium boiler, capacity 1,8 liters, heater 1 kW.
Manually operated water feeding (drinking water required for its functioning).
Automatic pressure control by thermostat with fixed setting.
Mobile trolley as option.
Voltage: 230V I +N 50-60Hz.

SB-5


Stainless steel electric steam boiler with electric steam iron.
Boiler capacity 5 liters, heater 1,45 kW.
Water level indicator with warning light for empty boiler.
Three safety devices fitted on the boiler: pressure switch, safety valve and safety thermostat.
Manual water feed.
Mobile trolley as option.
Voltage: 230V I +N 50Hz.

SB-24

Electric and automatic steam boiler SB-24 to supply steam to models without boiler. Available from 12 to 22 kW.
Water feed can be connected directly to the water mains or to a condensate tank. Pressure between 1 and 7 bar.
Capacity 24,9 litres.
Voltage: 230/400V III 50-60Hz.

TCC

Folding ironing table with electrically heated board and built in suction unit.
Without steam iron, without built-in boiler.
Board dimensions: 1.380 x 380 x 930 mm.

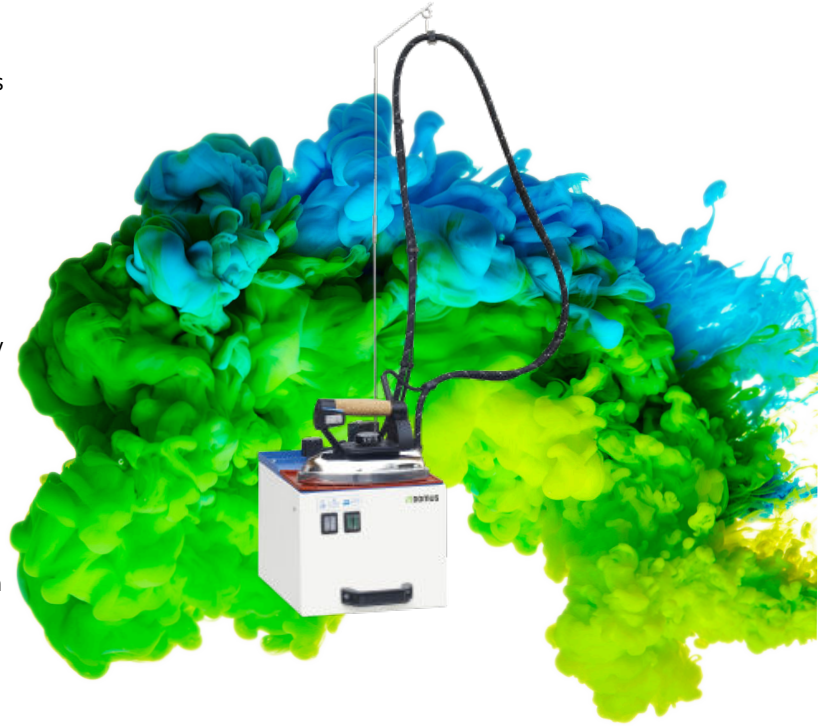

OPTIONS

- Wheels support

GENERAL DETAILS		UNIT.	SB-5
Boiler capacity		L	5,0
Steam pressure		Bar	-
Working temperature		°C	-
Working humidity		-	-
Boiler Heater		kW	1,45
Iron Heater		kW	0,80
Resistance table		W	-
Suction motor		W	-
POWER			
Boiler heaters		kW	-
Steam production		Kg/h	-
Pump motor power		HP	-
CONNECTIONS			
Water feeding inlet		in	-
Boiler exhaust		in	-
Steam inlet		in	-
Condensate return with valve		in	-
Autonomy		-	5/6
Operating pressure		BAR	2,8
DIMENSIONS			
Dimensions*		mm	262 x 397 x 1.090
Height with wheel stand mounted (option)		mm	1.580
Net weight		Kg	11
Gross weight		Kg	15
Packing dimensions		mm	600 x 450 x 540
Working dimensions		-	-
Voltage		V/Hz	230V 50
Sound level		dB	-

* Dimensions une fois assemblé