

TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.
37 available languages, 5 preset programs.
USB connection. Free Software online for programming, telemetry, data analysis.
IoT - **DOMUSCONNECT** standard.
Reversing roll as standard.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable parameter).
Fumes circulation circuit from the bottom reducing energy consumption.
Model with radiant gas burners: +25% productive.
EFFICIENT IRON: automatic regulation of ironing speed according to residual moisture as option.
OPTIMAL FEEDING: high production system, ironing speed up to 15 m/min as option.

ROBUSTNESS

Roll driving by speed inverter.
Panels in skinplate and stainless steel.
Nomex quality ironing belts: high temperatures resistant.
Nickel plate roll as option: anticorrosive, more durable.

ERGONOMICS


Acoustic comfort: <65 dba.
Appropriate operating height: 1.120 mm feeding belts.
Compact dimensions.

MAINTENANCE

Easy access to all components on both sides of the machine.
Complete technical menu: statistics, autotest, data recovery for technician and maintenance.
Remote communication: quicker intervention.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation
Front feeding and return.
Built-in COOL DOWN system.
Polished steel roll Ø 500 mm.
Roll length: 2.000, 2.600 and 3.300 mm.
Electric heating, gas radiant burner, steam.
CE standard

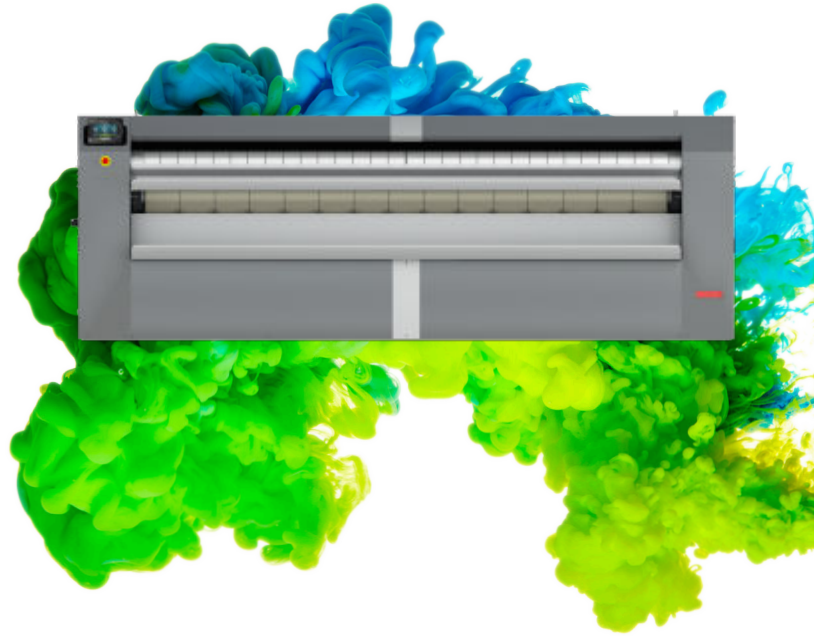

OPTIONS


- EFFICIENT IRON: humidity control Ø 500
- OPTIMAL FEEDING - high production HPS
- Nickel plated roll CM-3350 E / G
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder for CM- 3350 (front exit)
- Rear exit for CM-3350 (only with folder)
- Cross folder CPL-CROSS CM-3350
- Antistatic belts for CM-3350 ironers without folder
- Antistatic belts + bar for CM-3350 ironers with folder
- Maritime wooden packing for CM-3350
- 230V III 50/60Hz electric CM-3350 E
- 230V III 60Hz gas CM-3350 G
- 440V III 50/60Hz electric CM-3350 E
- 120V I 60Hz + N gas CM-3350 (Gas US)

| GENERAL DATA | UNIT. | CM-3350 TOUCH II | |
|---|------------|------------------|---------------|
| Electric or steam theoretical production* | Kg/h | 115 | |
| | Lb/h | 254 | |
| Atmo. gas theoretical production* | Kg/h | 115 | |
| | Lb/h | 254 | |
| Radiant gas theoretical production* | Kg/h | 138 | |
| | Lb/h | 304 | |
| Evaporation power | l/h | 62 | |
| | USgallon/h | 16,4 | |
| Roll Ø | mm | 500 | |
| | inch | 19,69 | |
| Working length | mm | 3.300 | |
| | inch | 129,92 | |
| Height floor-feeding belts | mm | 1.120 | |
| | inch | 44,09 | |
| Working speed | mt/min | 0,5 - 8 | |
| | ft/min | 1,6 - 26 | |
| Electronic control | - | YES | |
| No. Programs | Nº | 5 | |
| Surface contact with linen | º | 310 | |
| Length folder + rear exit | - | OPT. | |
| Elec/steam theoretical production* with folder | Kg/h | 92 | |
| | Lb/h | 203 | |
| Atmo. gas theoretical production* with folder | Kg/h | 92 | |
| | Lb/h | 203 | |
| Radiant gas theoretical production* with folder | Kg/h | 110 | |
| | Lb/h | 203 | |
| Evaporation power with folder | l/h | 50 | |
| | USgallon/h | 13,1 | |
| Working speed with folder | mt/min | 2 - 8 | |
| | ft/min | 6,5 - 26 | |
| POWER | | | |
| Electric heating | Kw | 54 | |
| Total electric power (elec. mod.) | Kw | 54,87 | |
| Gas heating | Kw | 69 | |
| Total electric power (gas mod.) | Kw | 0,87 | |
| Steam heating | Kw | 81 | |
| Total electric power (steam mod.) | Kw | 0,87 | |
| Roll motor power | Kw | 0,37 | |
| Fan motor power | Kw | 0,25 x2 | |
| Additional electric power with folder option | Kw | 0,56 | |
| Additional electric power folder + rear exit option | Kw | 0,74 | |
| CONNECTIONS | | E | G / S |
| Tension 230V I + N + T | nº x mm²/A | - | 3 x 2,5 / 10A |
| | nº x AWG/A | - | 3 x 13 / 10A |
| Tension 230V III + T | nº x mm²/A | 4 x 35 / 160A | 4 x 2,5 / 10A |
| | nº x AWG/A | 4 x 2 / 160A | 4 x 13 / 10A |
| Tension 400V III + N + T | nº x mm²/A | 5 x 25 / 100A | 5 x 2,5 / 10A |
| | nº x AWG/A | 5 x 3 / 100A | 5 x 13 / 10A |
| Ø Gas inlet | BSP | 1" | |
| Ø Steam inlet | BSP | 3/4" | |
| Ø Condensed (Steam models) | BSP | 1/2" | |
| OVERALL DIMENSIONS / PACKING DIMENSIONS | | | |
| Net / gross width | mm | 4.145 / 4.445 | |
| | inch | 163,2 / 175 | |
| Net / gross depth | mm | 1.070 / 1.153 | |
| | inch | 42,1 / 45,4 | |

| | | |
|----------------------------------|-------------------|-------------------------|
| Net / gross depth with rear exit | mm | 1.074 (1.417**) / 1.153 |
| | inch | 42,3 (55,8**) / 45,4 |
| Net / gross height | mm | 1.420 / 1.672 |
| | inch | 55,9 / 65,8 |
| Net / gross weight | Kg | 1.430 / 1.480 |
| | Lb | 3.153 / 3.263 |
| Net / gross weight with folder | Kg | 1.740 / 1.790 |
| | Lb | 3.836 / 3.946 |
| Net / gross volume | m ³ | 6,3 / 8,57 |
| | ft ³ | 222 / 303 |
| Net / gross volume with folder | m ³ | 6,66 (8,34**) / 8,57 |
| | ft ³ | 235 (294**) / 303 |
| OTHERS | | |
| Nº Fume outlet | Nº | 2 |
| Ø Extraction | mm | 153 |
| | inch | 6 |
| Airflow | m ³ /h | 1.200 |
| | cfm | 706 |
| Sound level | dB | 65 |

* Theoretical production 45% moisture

** With open rear exit

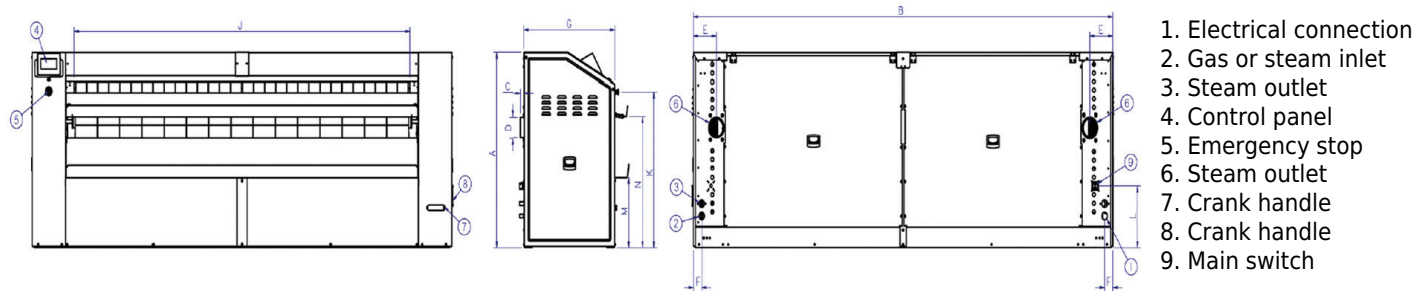

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N |
|---------|-------|-------|----|------|-----|----|-----|-------|-------|-------|-------|-----|-----|-----|
| CM-2050 | 1.420 | 2.845 | 36 | Ø152 | 228 | 83 | 897 | 2.160 | 1.079 | 2.004 | 1.128 | 447 | 509 | 952 |
| CM-2650 | 1.420 | 3.445 | 36 | Ø152 | 228 | 83 | 897 | 2.760 | 1.079 | 2.604 | 1.128 | 447 | 509 | 952 |
| CM-3350 | 1.420 | 4.145 | 36 | Ø152 | 228 | 83 | 897 | 3.460 | 1.079 | 3.304 | 1.128 | 447 | 509 | 952 |