

## TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.  
 USB Connection.  
 Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
 Videos shown on display: ads, instructions (useful for coin laundry).  
 37 languages.

## OUTSTANDING FEATURES

Reversing drum action as standard.  
 Stainless steel drum as standard.  
 Frequency inverter as standard.

## EFFICIENCY

EFFICIENT DRY - Intelligent humidity control, with new drum inlet temperature control.  
 AIR RE-CYCLE - Efficient air recirculation system.  
 THERMAL INSULATION - Complete air-flow circuit and double door glass.  
 FULL FLOW - Optimized system with mixed airflow.  
 Big fluff filter.

## VERSATILITY

Make to order - customisation.  
 Wet Cleaning.

## CONNECTIVITY

Standard IoT **DOMUSCONNECT**.  
 Management for laundries: OPL and self-service.

## ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
 Biggest door diameters.  
 Opening sense of door adjustable on site.

## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
 Technical menu: statistics for technicians.

## OTHERS

Grey skinplate outer casing, stainless steel look.  
**NEW:** Geared motor drive on models DTT-45 to DTT-80  
 SFEX - Integrated Fire Extinguishing System.  
 SOFT DRY - new drum with stamped holes.  
 COOL DOWN - anti-wrinkle at the end of the cycle.  
 Heating options: electric, gas and steam.  
 CE approved




## OPTIONS

- License IoT - DOMUSCONNECT
- Back panel with air filter DTT-11 to DTT-35
- Natural gas heated tumble dryer
- Opposite door opening DTT-11 to DTT-35
- Tropicalized model
- Dosing spraying of perfume
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Stainless steel front and side panels DTT-14/18
- Front panel in stainless steel DTT-11/14/18
- Steam battery in stainless steel DTT-11/14/18
- Low pressure steam battery DTT-11/14/18
- Reduced power (12kw instead of 18kw) for electric heated 14kg and 18kg models.
- Maritime wooden packing DTT-14/18
- 400V III 60Hz DTT-11 to DTT-35
- 230V III 50Hz DTT-11/14/18 E
- 230V III 60Hz DTT-11/14/18 E
- 230V III 60Hz DTT-11 to DTT-35 G/S
- 440/480V III 60Hz DTT-11/14/18 ECO-ENERGY

CAPACITY & DRUM	UNIT.	DTT-18 ECO-ENERGY
Capacity 1/18	Kg	18,3
	lb	40,4
Capacity 1/20	Kg	16,5
	lb	36,3
Ø Drum	mm	750
	inch	29,53
Drum length	mm	746
	inch	29,37
Drum volume	l	330
	cu ft	11,64
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	976
	inch	38,43
Height from floor to bottom of door	mm	618
	inch	24,33
ELECTRIC HEATING		
Evaporation capacity	L/h	14,90
	US gallon/h	3,94
Hourly output	Kg/h	30
	lb/h	66,1
Installed heating power	kW	18
Installed electrical power	kW	18,97
Drum motor power	kW	0,37
GAS HEATING		
Evaporation capacity (gas model)	L/h	16,30
	US gallon/h	4,306
Hourly output (gas model)	Kg/h	33,60
	lb/h	74,1
Installed gas heating power	kcal/h	17638
	Btu/h	70000
Installed gas heating power	kW	20,51
Installed electrical power	kW	0,97
Instant propane gas consumption (G31)	Kg/h	1,76
	lb/h	3,88
Instant natural gas consumption (G20)	m <sup>3</sup> /h	2,17
	cfm	1,28
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	30
	Btu/h	102364
Installed electrical power	kW	0,97
Steam consumption (8 barG) - Standard	kg/h	53
Steam consumption (116 psiG)	lb/h	63,8
Steam pressure	barG	6 - 9
	psiG	87 - 130,5
Standard steam inlet - outlet	BSPT- ISO7.1	3/4"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure	kg/h	57
Steam consumption (72,5 psiG) - Low Pressure	lb/h	68,7
Steam pressure (low pressure)	barG	3 - 6
	psiG	43,5 - 92
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m <sup>3</sup> /h	-

Thermal oil connection	BSP	-	
<b>VENTILATION</b>			
Fan motor power	kW	0,55	
Nominal air flow rate	m <sup>3</sup> /h	1.200	
	cfm	706,29	
Ø Fume exhaust	mm	200	
	inch	7,87	
<b>HEAT EMISSION</b>			
Maximum total heat emission	kW	1,44	
	Btu/h	4916,4	
Max. front heat emission	kW	0,9	
	Btu/h	3072,7	
<b>CONNECTIONS</b>			
Tension 230V - I + N + T	Nº x mm <sup>2</sup> / A	E	G / S
Tension 230V - III + T	Nº x mm <sup>2</sup> / A	4 x 16 / 63A	3 x 1,5 / 16A
Tension 400V - III + N + T	Nº x mm <sup>2</sup> / A	5 x 10 / 32A	3 x 1,5 / 16A
<b>NET DIMENSIONS / D. WITH PACKING</b>			
Net / gross width	mm	785 / 865	
	inch	30,91 / 34,06	
Net / gross depth	mm	1.125 / 1.210	
	inch	44,29 / 47,64	
Net height / gross height	mm	1.694 / 1.840	
	inch	66,69 / 72,44	
Net / gross weight	Kg	187 / 200	
	lb	412,26 / 440,92	
<b>OTHERS</b>			
Sound level	dB	64	

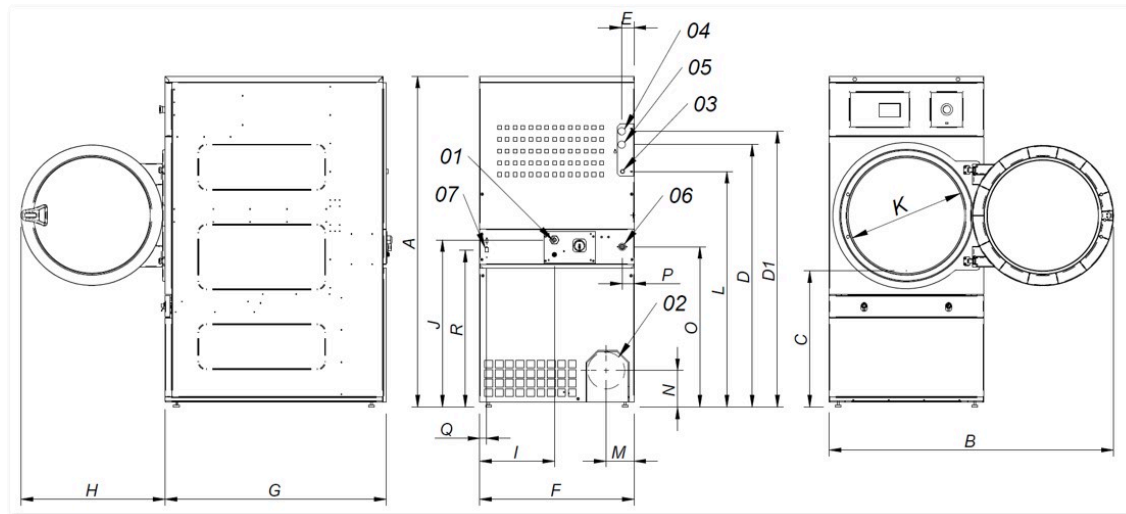

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (DTT-11-14-18)
- 04 Steam inlet 1" (DTT-22)
- 05 Condensate outlet 3/4" (DTT-11-14-18)
- 05 Condensate 1" (DTT-22)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
DTT-18 ECO-ENERGY	1.694	1.447	689	1.354	1.422	68	68	785	1.125	735	380	870	575	1.226	133	180	830	65	35	805
DTT-22 ECO-ENERGY	1.812	1.552	743	1.430	1.532	112	55	890	1.255	735	107	920	575	1.344	238	180	885	65	37	860