

TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.
37 available languages, 5 preset programs.
USB connection. Free Software online for programming, telemetry, data analysis.
IoT - **DOMUSCONNECT** standard.
Reversing roll as standard.

EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable parameter).
Fumes circulation circuit from the bottom reducing energy consumption.
Model with radiant gas burners: +25% productive.
EFFICIENT IRON: automatic regulation of ironing speed according to residual moisture as option.
OPTIMAL FEEDING: high production system, ironing speed up to 15 m/min as option.

ROBUSTNESS

Roll driving by speed inverter.
Panels in skinplate and stainless steel.
Nomex quality ironing belts: high temperatures resistant.
Nickel plate roll as option: anticorrosive, more durable.

ERGONOMICS


Acoustic comfort: <65 dba.
Appropriate operating height: 1.120 mm feeding belts.
Compact dimensions.

MAINTENANCE

Easy access to all components on both sides of the machine.
Complete technical menu: statistics, autotest, data recovery for technician and maintenance.
Remote communication: quicker intervention.

OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation
Front feeding and return.
Built-in COOL DOWN system.
Polished steel roll Ø 500 mm.
Roll length: 2.000, 2.600 and 3.300 mm.
Electric heating, gas radiant burner, steam.
CE standard

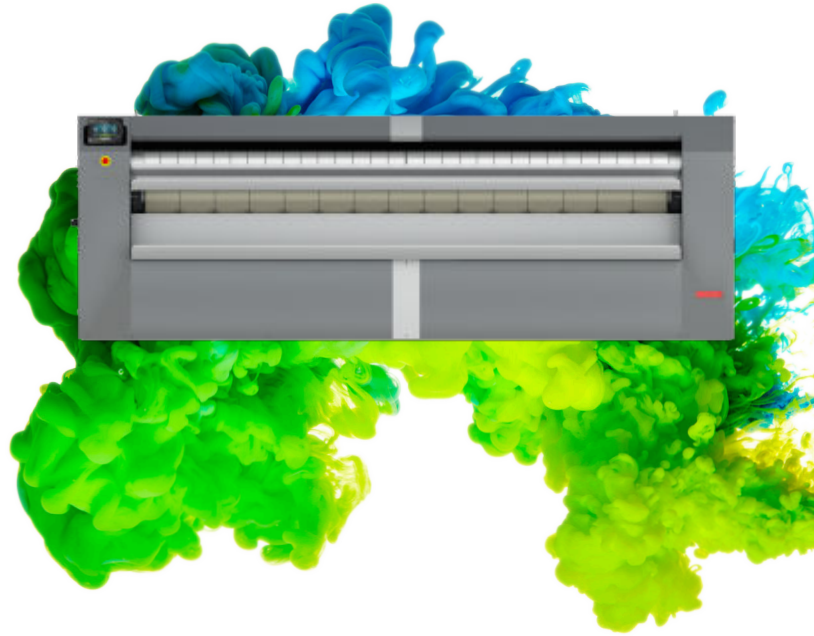

OPTIONS


- EFFICIENT IRON: humidity control Ø 500
- OPTIMAL FEEDING - high production HPS
- Nickel plated roll CM-2650 E / G
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder for CM- 2650 (front exit)
- Rear exit for CM-2650 (only with folder)
- Cross folder CPL-CROSS CM-2650
- Antistatic belts for CM-2650 ironers without folder
- Antistatic belts + bar for CM-2650 ironers with folder
- Maritime wooden packing for CM-2650
- 230V III 50/60Hz electric CM-2650 E
- 230V III 60Hz gas CM-2650 G
- 440V III 50/60Hz electric CM-2650 E
- 120V I 60Hz + N gas CM-2650 (Gas US)

GENERAL DATA	UNIT.	CM-2650 TOUCH II	
Electric or steam theoretical production*	Kg/h	84	
	Lb/h	185	
Atmo. gas theoretical production*	Kg/h	84	
	Lb/h	185	
Radiant gas theoretical production*	Kg/h	100	
	Lb/h	220	
Evaporation power	l/h	45	
	USgallon/h	11,9	
Roll Ø	mm	500	
	inch	19,69	
Working length	mm	2.600	
	inch	102,36	
Height floor-feeding belts	mm	1.120	
	inch	44,09	
Working speed	mt/min	0,5 - 8	
	ft/min	1,6 - 26	
Electronic control	-	YES	
No. Programs	Nº	5	
Surface contact with linen	º	310	
Length folder + rear exit	-	OPT.	
Elec/steam theoretical production* with folder	Kg/h	68	
	Lb/h	150	
Atmo. gas theoretical production* with folder	Kg/h	68	
	Lb/h	150	
Radiant gas theoretical production* with folder	Kg/h	80	
	Lb/h	150	
Evaporation power with folder	l/h	36	
	USgallon/h	9,5	
Working speed with folder	mt/min	2 - 8	
	ft/min	6,5 - 26	
POWER			
Electric heating	Kw	40,50	
Total electric power (elec. mod.)	Kw	41,37	
Gas heating	Kw	55	
Total electric power (gas mod.)	Kw	0,87	
Steam heating	Kw	64	
Total electric power (steam mod.)	Kw	0,87	
Roll motor power	Kw	0,37	
Fan motor power	Kw	0,25 x2	
Additional electric power with folder option	Kw	0,56	
Additional electric power folder + rear exit option	Kw	0,74	
CONNECTIONS		E	G / S
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 10A
	nº x AWG/A	-	3 x 13 / 10A
Tension 230V III + T	nº x mm²/A	4 x 25 / 125A	4 x 2,5 / 10A
	nº x AWG/A	4 x 3 / 125A	4 x 13 / 10A
Tension 400V III + N + T	nº x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A
	nº x AWG/A	5 x 5 / 80A	5 x 13 / 10A
Ø Gas inlet	BSP	1"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	3.445 / 3.745	
	inch	135,6 / 147,4	
Net / gross depth	mm	1.070 / 1.153	
	inch	42,1 / 45,4	

Net / gross depth with rear exit	mm	1.074 (1.417**) / 1.153
	inch	42,3 (55,8**) / 45,4
Net / gross height	mm	1.420 / 1.672
	inch	55,9 / 65,8
Net / gross weight	Kg	1.180 / 1.470
	Lb	2.601 / 3.241
Net / gross weight with folder	Kg	1.435 / 1.470
	Lb	3.164 / 3.241
Net / gross volume	m ³	5,23 / 7,22
	ft ³	185 / 255
Net / gross volume with folder	m ³	5,54 (6,93**) / 7,22
	ft ³	195 (244**) / 255
OTHERS		
Nº Fume outlet	Nº	2
Ø Extraction	mm	153
	inch	6
Airflow	m ³ /h	1.200
	cfm	706
Sound level	dB	65

* Theoretical production 45% moisture

** With open rear exit

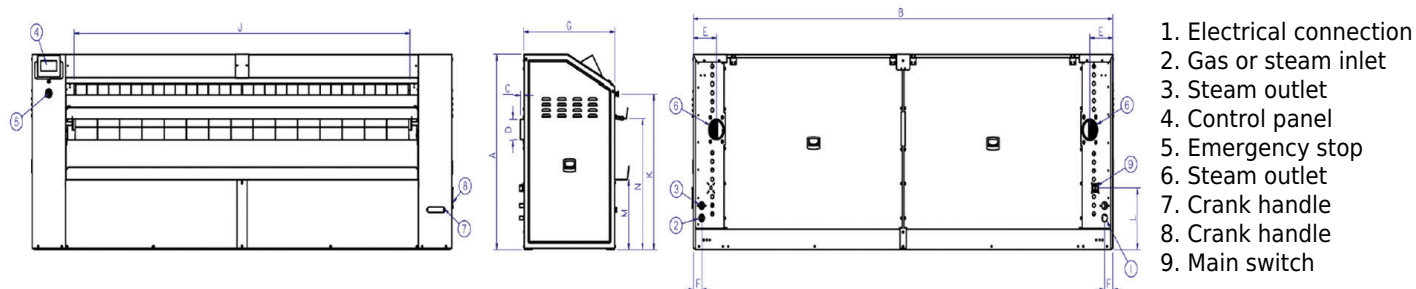

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CM-2050	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
CM-2650	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
CM-3350	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952