

**ELECTRONIC PROGRAMMER**

M programmer: push buttons to control temperature and time.

**OUTSTANDING FEATURES**

Reversing drum action as standard.  
Galvanised steel drum.  
Frequency inverter as standard.

**EFFICIENCY**

Big fluff filter.

**VERSATILITY**

Make to order - customisation.  
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.

**ERGONOMICS**


Biggest door diameters.  
Opening sense of door adjustable on site.

**MAINTENANCE**

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians and maintenance with external console (with console option).  
Easy to access to components.

**OTHERS**

White painted panels.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric or gas.  
CE approved

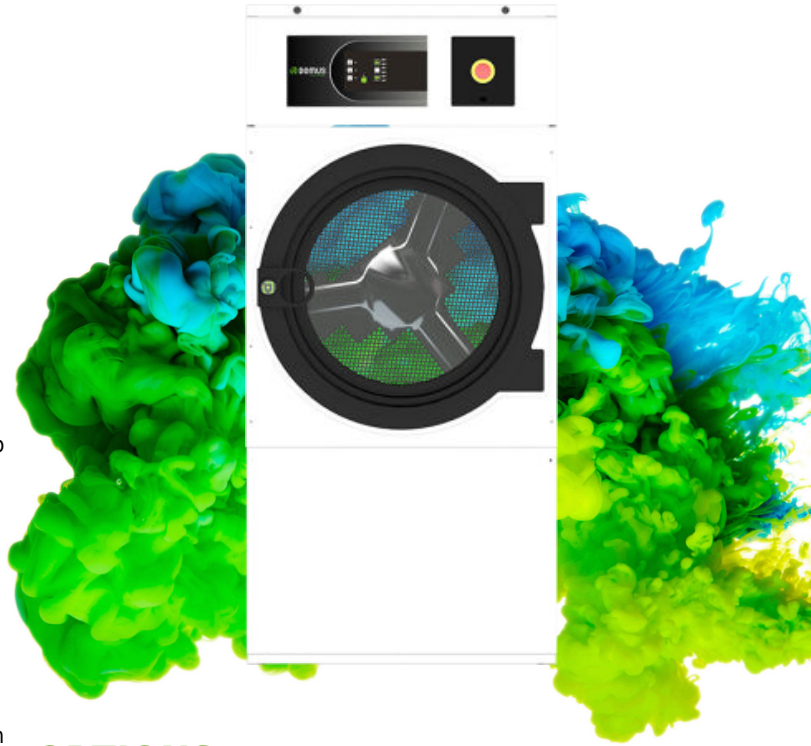


**OPTIONS**

- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-14/18
- 230V III 50Hz DLM-11/14/18 E
- 400V III 60Hz DLM-11/14/18/22/28/35
- 230V III 60Hz DLM-11/14/18 E
- 230V III 60Hz DLM-11 to DLM-35 G/S
- 440/480V III 60Hz DLM-11/14/18
- Reduced power (12kw instead of 18kw) DLM-14/18 for electric heated 14kg and 18kg models.
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DLM-14	
Capacity 1/18		Kg	15	
		lb	33,1	
Capacity 1/20		Kg	13,5	
		lb	29,8	
Ø Drum		mm	750	
		inch	29,53	
Drum length		mm	610	
		inch	24,02	
Drum volume		l	270	
		cu ft	9,53	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	976	
		inch	38,43	
Height from floor to bottom of door		mm	618	
		inch	24,33	
ELECTRIC HEATING				
Evaporation capacity		L/h	13,5	
		US gallon/h	3,6	
Hourly output		Kg/h	26,9	
		lb/h	59,3	
Installed heating power		kW	18	
Installed electrical power		kW	18,67	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	15,4	
		US gallon/h	4,068	
Hourly output (gas model)		Kg/h	30,3	
		lb/h	66,7	
Installed gas heating power		kcal/h	17638	
		Btu/h	70000	
Installed gas heating power		kW	20,51	
Installed electrical power		kW	0,67	
Instant propane gas consumption (G31)		Kg/h	1,76	
		lb/h	3,88	
Instant natural gas consumption (G20)		m <sup>3</sup> /h	2,17	
		cfm	1,28	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,25	
Nominal air flow rate		m <sup>3</sup> /h	850	
		cfm	500,29	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	1,8	
		Btu/h	6145,5	
Max. front heat emission		kW	1,26	
		Btu/h	4301,8	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	4 x 16 / 63A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	5 x 10 / 32A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30,91 / 34,06	

Net / gross depth	mm	989 / 1.074
	inch	38,94 / 42,28
Net / gross height	mm	1.694 / 1.840
	inch	66,69 / 72,44
Net / gross weight	Kg	180 / 190
	lb	396,83 / 418,88
<b>OTHERS</b>		
Sound level	dB	64

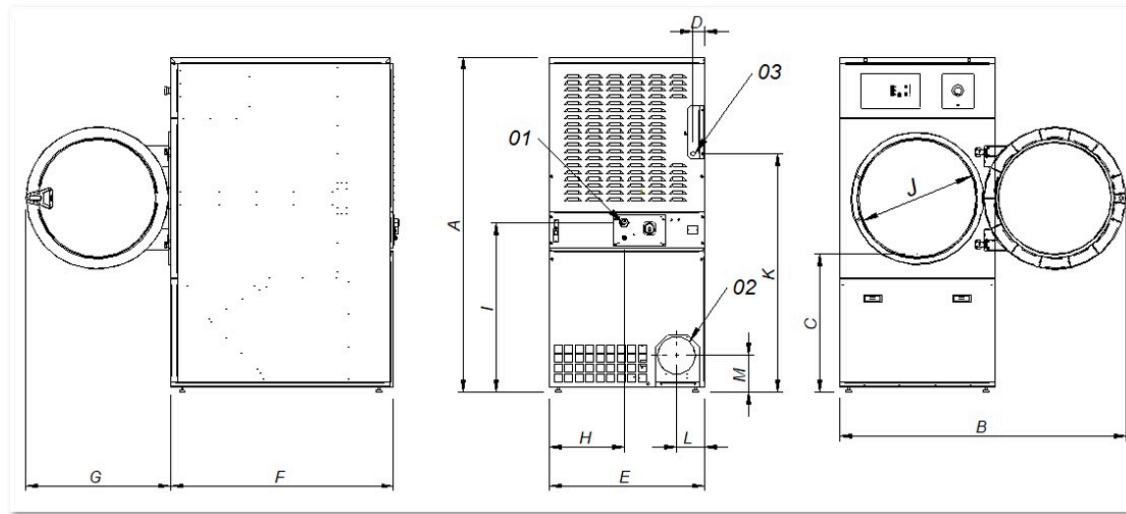

01 Power supply  
02 Fumes output Ø 200  
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-11	1.694	1.447	689	68	785	855	735	380	870	575	1.226	133	180
DLM-14	1.694	1.447	689	68	785	989	735	380	870	575	1.226	133	180