

 **ELECTRONIC PROGRAMMER**

M programmer: push buttons to control temperature and time.

 **OUTSTANDING FEATURES**

Reversing drum action as standard.  
Galvanised steel drum.  
Frequency inverter as standard.

 **EFFICIENCY**

Big fluff filter.

 **VERSATILITY**

Make to order - customisation.  
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry.

 **ERGONOMICS**

Biggest door diameters.  
Opening sense of door adjustable on site.

 **MAINTENANCE**

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians and maintenance with external console (with console option).  
Easy to access to components.

 **OTHERS**

White painted panels.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric or gas.  
CE approved




**OPTIONS**

- Opposite door opening
- Back panel with air filter
- M programmer display
- Maritime wooden packing DLM-22
- 400V III 60Hz DLM-11/14/18/22/28/35
- 230V III 50Hz DLM-22/28/35
- 230V III 60Hz DLM-22/28/35 E
- 230V III 60Hz DLM-11 to DLM-35 G/S
- 440/480V III 60Hz DLM-22/28/35
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DLM-22	
Capacity 1/18		Kg	24,4	
		lb	53,9	
Capacity 1/20		Kg	22,0	
		lb	48,5	
Ø Drum		mm	835	
		inch	32,87	
Drum length		mm	800	
		inch	31,5	
Drum volume		l	440	
		cu ft	15,54	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	1.030	
		inch	40,55	
Height from floor to bottom of door		mm	672	
		inch	26,46	
ELECTRIC HEATING				
Evaporation capacity		L/h	17	
		US gallon/h	4,5	
Hourly output		Kg/h	34	
		lb/h	75	
Installed heating power		kW	24	
Installed electrical power		kW	24,97	
Drum motor power		kW	0,37	
GAS HEATING				
Evaporation capacity (gas model)		L/h	22,30	
		US gallon/h	5,283	
Hourly output (gas model)		Kg/h	40	
		lb/h	88,2	
Installed gas heating power		kcal/h	26655	
		Btu/h	105775,6	
Installed gas heating power		kW	31	
Installed electrical power		kW	0,97	
Instant propane gas consumption (G31)		Kg/h	2,66	
		lb/h	5,86	
Instant natural gas consumption (G20)		m <sup>3</sup> /h	3,28	
		cfm	1,93	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,55	
Nominal air flow rate		m <sup>3</sup> /h	1.200	
		cfm	706,29	
Ø Fume exhaust		mm	200	
		inch	7,87	
HEAT EMISSION				
Maximum total heat emission		kW	2,4	
		Btu/h	8193,9	
Max. front heat emission		kW	1,68	
		Btu/h	5735,8	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	4 x 25 / 80A	3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	5 x 10 / 40A	3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	890 / 970	
		inch	35,04 / 38,19	

Net / gross depth	mm	1.255 / 1.345
	inch	49,41 / 52,95
Net / gross height	mm	1.812 / 1.940
	inch	71,34 / 76,38
Net / gross weight	Kg	210 / 230
	lb	462,97 / 507,06
<b>OTHERS</b>		
Sound level	dB	65

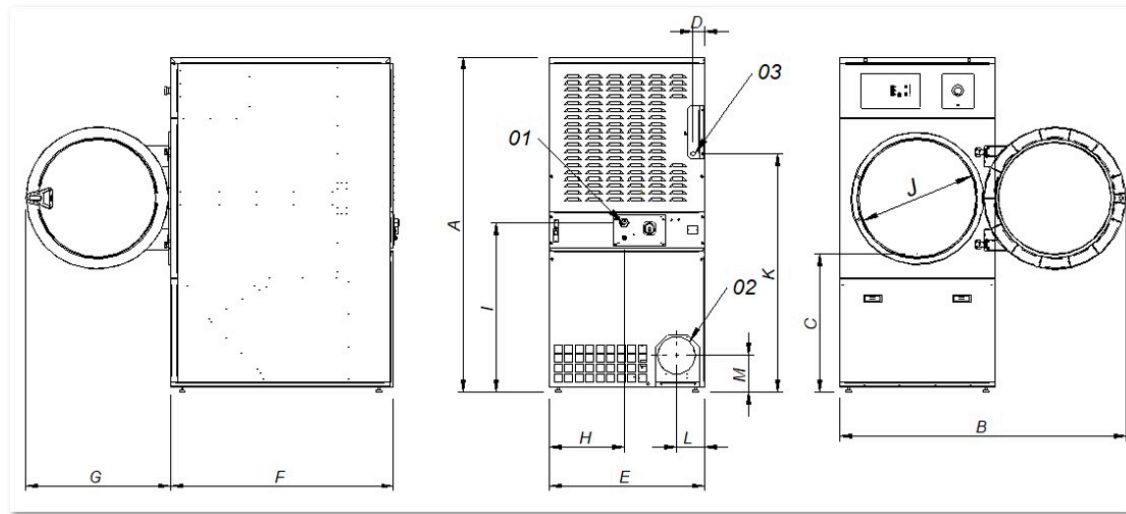

01 Power supply  
02 Fumes output Ø 200  
03 Gas inlet 1/2"

	A	B	C	D	E	F	G	H	I	J	K	L	M
DLM-18	1.694	1.447	689	68	785	1.125	735	380	870	575	1.226	133	180
DLM-22	1.812	1.552	743	112	890	1.255	735	107	920	575	1.344	238	180