



## ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.



## OUTSTANDING FEATURES

Reversing drum action as standard.  
Stainless steel drum as standard.  
Frequency inverter as standard.



## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.  
Big fluff filter.



## VERSATILITY

Make to order - Customisation  
OPL > Self-service - Standard OPL model easily trasformable to coin laundry uses.



## ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
Biggest door diameters.



## MAINTENANCE

Hinged control panel: easy and ergonomic access.  
Technical menu: statistics for technicians and maintenance with external console (with console option).



## OTHERS

Grey skinplate outer casing, stainless steel look.  
SOFT DRY - new drum with stamped holes.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric or gas except DTM2-22 XP only gas.  
CE approved



## OPTIONS

- Double doorglass (order 1 unit per column)
- Screen in M programmer (2 units)
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm)
- Stainless steel front and side panels DTM2-22 XP
- Front panel in stainless steel DTM2-22 XP
- Maritime wooden packing DTM2-22 XP
- 400V 3~ 50 Hz 11/14/18/22 XP
- 400V 3N 60 Hz 11/14/18/22 XP
- 230V 3~ 60 Hz 11/14/18/22 G XP
- 440/480V 3~ 60 Hz 11/14/18/22 XP (marine)
- Several payment systems for self-service

| CAPACITY & DRUM                          | UNIT.          | DTM2-22 XP  |                   |
|------------------------------------------|----------------|-------------|-------------------|
| Capacity 1/18                            | Kg             | 24,3 x 2    |                   |
|                                          | lb             | 53,5 x 2    |                   |
| Capacity 1/20                            | Kg             | 21,9 x 2    |                   |
|                                          | lb             | 48,3 x 2    |                   |
| Ø Drum                                   | mm             | 835         |                   |
|                                          | inch           | 32,9        |                   |
| Drum length                              | mm             | 800         |                   |
|                                          | inch           | 31,5        |                   |
| Drum volume                              | l              | 440         |                   |
|                                          | cu ft          | 15,54       |                   |
| Ø Door hole                              | mm             | 575         |                   |
|                                          | inch           | 22,6        |                   |
| Door center height                       | mm             | 574 / 1618  |                   |
|                                          | inch           | 22,60/63,70 |                   |
| Height from floor to bottom of door      | mm             | 214 / 1258  |                   |
|                                          | inch           | 8,46/49,53  |                   |
| ELECTRIC HEATING                         |                |             |                   |
| Evaporation capacity                     | L/h *          | -           |                   |
|                                          | US gallon/h *  | -           |                   |
| Hourly output                            | Kg/h **        | -           |                   |
|                                          | lb/h **        | -           |                   |
| Installed heating power                  | kW             | -           |                   |
| Installed electrical power               | kW             | -           |                   |
| Drum motor power                         | kW             | 0,37 x 2    |                   |
| GAS HEATING                              |                |             |                   |
| Evaporation capacity (gas model)         | L/h            | 22 x 2      |                   |
|                                          | US gallon/h    | 5,81 x 2    |                   |
| Hourly output (gas model)                | Kg/h           | 44 x 2      |                   |
|                                          | lb/h           | 97 x 2      |                   |
| Installed gas heating power              | kcal/h ***     | 26139 x 2   |                   |
|                                          | Btu/h ***      | 103798 x 2  |                   |
|                                          | kW ***         | 30,4 x 2    |                   |
| Installed electrical power               | kW             | 1,94        |                   |
| Consumption of propane gas average (G31) | Kg/h           | 2,08 x 2    |                   |
|                                          | lb/h           | 4,60 x 2    |                   |
| Instant natural gas consumption (G20)    | m³/h           | 3,22 x 2    |                   |
|                                          | cfm            | 1,89 x 2    |                   |
| Ø Gas inlet                              | BSPP ISO 228-1 | 3/4"        |                   |
| VENTILATION                              |                |             |                   |
| Fan motor power                          | kW             | 0,55 x 2    |                   |
| Nominal air flow rate                    | m³/h           | 900 x 2     |                   |
|                                          | cfm            | 529,72 x 2  |                   |
| Ø Fume exhaust                           | mm             | 250         |                   |
|                                          | inch           | 9,84        |                   |
| HEAT EMISSION                            |                |             |                   |
| Maximum total heat emission 10-8% (9-7%) | kW             | 5           |                   |
|                                          | Btu/h          | 16934       |                   |
| Max. front heat emission 7-5% (4-2%)     | kW             | 1,9         |                   |
|                                          | Btu/h          | 6350        |                   |
| CONNECTIONS                              |                | E           | G / S             |
| Tension 230V - I + N + T                 | Nº x mm² / A   | -           | 3 x 2,5 / 20      |
| Tension 230V - III + T                   | Nº x mm² / A   | -           | 3 x 2,5 / 20 (5*) |
| Tension 400V - III + N + T               | Nº x mm² / A   |             | 3 x 2,5 / 20 (6*) |
| NET DIMENSIONS / D. WITH PACKING         |                |             |                   |
| Net / gross width                        | mm             | 870 / 950   |                   |
|                                          | inch           | 34,3 / 37,4 |                   |

|                                   |      |               |
|-----------------------------------|------|---------------|
| Net / gross depth                 | mm   | 1312 / 1395   |
|                                   | inch | 51,7 / 54,9   |
| Net / gross height                | mm   | 2118 / 2250   |
|                                   | inch | 83,4 / 88,6   |
| Net / gross weight                | Kg   | 373,5 / 388,5 |
|                                   | lb   | 823 / 856     |
| <b>OTHERS</b>                     |      |               |
| Max. sound level (at 1m in front) | dB   | 69            |


\* Drying conditions: full load (1/20) of towels, drying temperature 90°C.

\*\* Kg dry linen per hour. Drying conditions: full load (1/20) of towels, drying temperature 90°C.

\*\*\* Calculation of thermal power from PCI.

(5\*) Connect 2 phases and earth.

(6\*) Connect phase, neutral and earth.

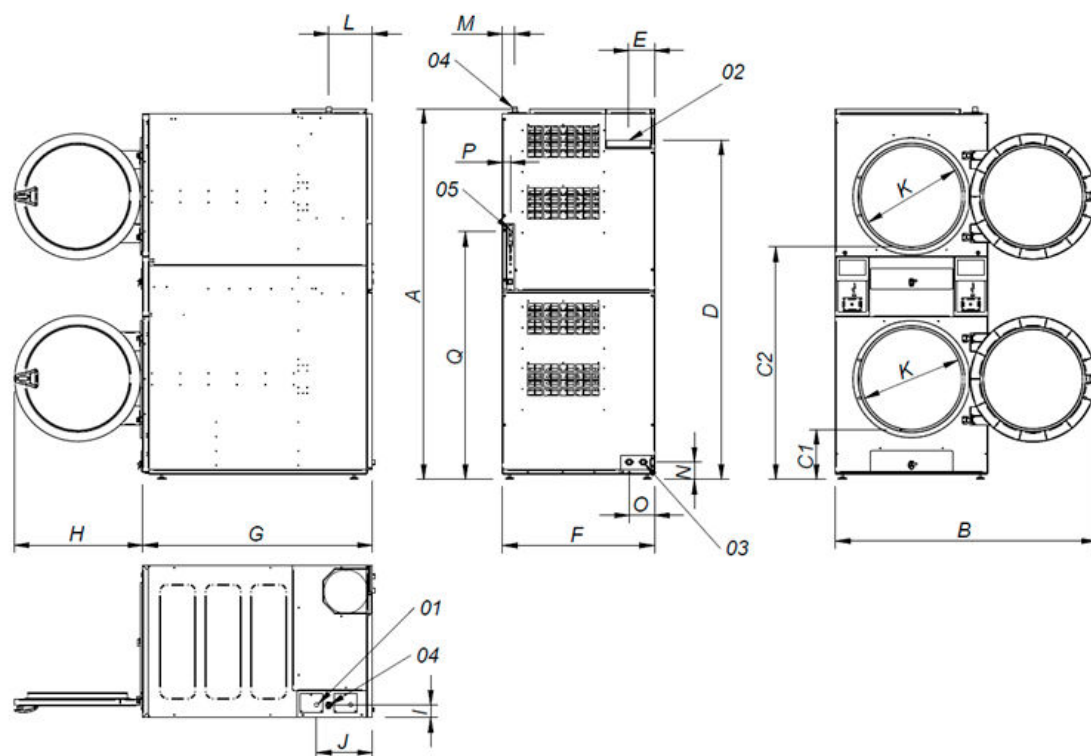

- 01. Power supply
- 02. Fumes output Ø250
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 3/4"
- 05. Ethernet connection (only touch control)

|            |    | A    | B    | C1  | C2   | D    | E   | F   | G    | H   | I  | J   | K   | L   | M  | N   | O   | P  | Q    |
|------------|----|------|------|-----|------|------|-----|-----|------|-----|----|-----|-----|-----|----|-----|-----|----|------|
| DTM2-22 XP | mm | 2118 | 1490 | 286 | 1330 | 1940 | 149 | 870 | 1312 | 735 | 73 | 320 | 575 | 250 | 70 | 100 | 145 | 45 | 1416 |