



## TOUCH II

User friendly and totally programmable 7" TOUCH II  
37 available languages, 5 preset programs.  
USB connection. Free Software online for programming, telemetry, data analysis.  
IoT - **DOMUSCONNECT** standard.  
Reversing roll as standard.



## EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.  
Automatic shutdown at 80°C (adjustable parameter).  
Fumes circulation circuit from the bottom reducing energy consumption.

**Model with radiant gas burners:** +25% productive.

**EFFICIENT IRON:** automatic regulation of ironing speed according to residual moisture as standard.

**OPTIMAL FEEDING:** high production system, ironing speed up to 15 m/min as standard.



## ROBUSTNESS

Roll driving by speed inverter: smooth operation preventing the wear of belts and mechanical elements.

Panels in skinplate and stainless steel.

Nomex quality ironing belts: high temperatures resistant.

Nickel plate roll as option: Nickel-plated cylinder, anticorrosive, more durable.



## ERGONOMICS

Acoustic comfort: <65 dba.

Appropriate height of feeding: 1.120 mm.

Compact dimensions.



## MAINTENANCE

Easy access to all components on both sides of the machine.

Complete technical menu: statistics, autotest, data recovery for technician and maintenance.

Remote communication: faster intervention.



## OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.

Front feeding and return.


Built-in COOL DOWN system.

Polished steel roll Ø 650 mm.

Roll length: 2.000, 2.600 and 3.300 mm.

Electric, radiant gas and steam heating.

CE standard

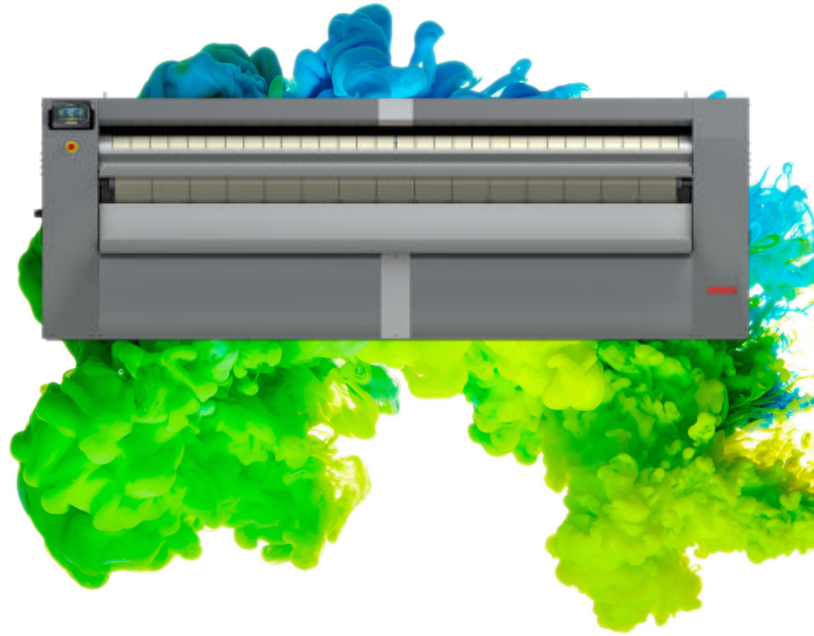

## OPTIONS


- Nickel plated roll CM-2065
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder for CM- 2065 (front exit)
- Rear exit for CM-2065 (only with folder)
- Antistatic belts for CM-2065 ironers without folder
- Antistatic belts + bar for CM-2065 ironers with folder
- Maritime wooden packing for CM-2065
- Cross folder CPL-CROSS CM-2065
- 230V III 50/60Hz electric CM-2065 E
- 230V III 60Hz gas CM-2065 G
- 440V III 50/60Hz electric CM-2065 E
- 120V I 60Hz + N gas CM-2065 (Gas US)

GENERAL DATA	UNIT.	CM-2065 TOUCH II	
Electric theoretical production*	Kg/h	90	
	Lb/h	198	
Radiant gas theoretical production*	Kg/h	104	
	Lb/h	229	
Evaporation power	l/h	47	
	USgallon/h	12,4	
Roll Ø	mm	650	
	inch	25,59	
Working length	mm	2.000	
	inch	78,74	
Height floor-feeding belts	mm	1.120	
	inch	44,09	
Working speed	mt/min	0,5 - 15	
	ft/min	1,6 - 49	
Electronic control	-	YES	
No. Programs	Nº	5	
Surface contact with linen	º	310	
Length folder + rear exit	-	OPT.	
Electric theoretical production* with folder	Kg/h	63	
	Lb/h	139	
Radiant gas theoretical production* with folder	Kg/h	72	
	Lb/h	159	
Evaporation power with folder	l/h	32	
	USgallon/h	8,6	
Working speed with folder	mt/min	2 - 10	
	ft/min	6,5 - 32	
<b>POWER</b>			
Electric heating	Kw	42	
Total electric power (elec. mod.)	Kw	43,05	
Gas heating	Kw	52	
Total electric power (gas mod.)	Kw	1,05	
Steam heating	Kw	60	
Total electric power (steam mod.)	Kw	1,05	
Roll motor power	Kw	0,55	
Fan motor power	Kw	0,25 x2	
Additional electric power with folder option	Kw	0,56	
Additional electric power with folder + rear exit option	Kw	0,74	
<b>CONNECTIONS</b>		<b>E</b>	<b>G / S</b>
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 10A
	nº x AWG/A	-	3 x 13 / 10A
Tension 230V III + T	nº x mm²/A	4 x 25 / 125A	4 x 2,5 / 10A
	nº x AWG/A	4 x 3 / 125A	4 x 13 / 10A
Tension 400V III + N + T	nº x mm²/A	5 x 16 / 80A	5 x 2,5 / 10A
	nº x AWG/A	5 x 5 / 80A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
<b>OVERALL DIMENSIONS / PACKING DIMENSIONS</b>			
Net / gross width	mm	2.845 / 3.145	
	inch	112 / 123,8	
Net / gross depth	mm	1.070 / 1.153	
	inch	42,1 / 45,4	
Net / gross depth with rear exit	mm	1.166 (1.488**) / 1.153	
	inch	45,9 (58,6**) / 45,4	
Net / gross height	mm	1.420 / 1.672	
	inch	55,9 / 65,8	

Net / gross weight	Kg	1.189 / 1.231
	Lb	2.621 / 2.714
Net / gross weight with folder	Kg	1.399 / 1.441
	Lb	3.084 / 3.177
Net / gross volume	m <sup>3</sup>	4,32 / 6,06
	ft <sup>3</sup>	153 / 214
Net / gross volume with folder	m <sup>3</sup>	4,86 (6,01**) / 6,06
	ft <sup>3</sup>	171 (212**) / 214
<b>OTHERS</b>		
Nº Fume outlet	Nº	2
Ø Extraction	mm	153
	inch	6
Airflow	m <sup>3</sup> /h	1.200
	cfm	706
Sound level	dB	65

\* Theoretical production 45% moisture

\*\* With open rear exit

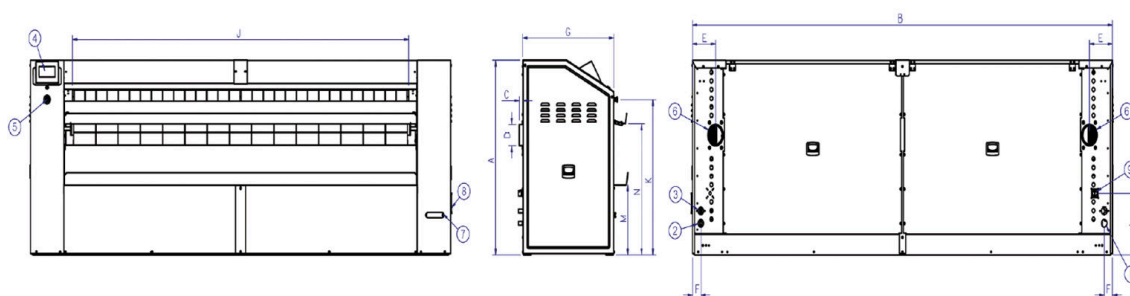

1. Electrical connection
2. Gas or steam inlet
3. Steam outlet
4. Control panel
5. Emergency stop
6. Steam outlet
7. Crank contactor
8. Crank
9. Main switch

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CM-2065	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
CM-2665	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
CM-3365	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952