



TOUCH II

User friendly and totally programmable 7" TOUCH II
37 available languages, 5 preset programs.
USB connection. Free Software online for programming, telemetry, data analysis.
IoT - **DOMUSCONNECT** standard.
Reversing roll as standard.



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.
Automatic shutdown at 80°C (adjustable parameter).
Fumes circulation circuit from the bottom reducing energy consumption.

Model with radiant gas burners: +25% productive.

EFFICIENT IRON: automatic regulation of ironing speed according to residual moisture as standard.

OPTIMAL FEEDING: high production system, ironing speed up to 15 m/min as standard.



ROBUSTNESS

Roll driving by speed inverter: smooth operation preventing the wear of belts and mechanical elements.

Panels in skinplate and stainless steel.

Nomex quality ironing belts: high temperatures resistant.

Nickel plate roll as option: Nickel-plated cylinder, anticorrosive, more durable.



ERGONOMICS

Acoustic comfort: <65 dba.

Appropriate height of feeding: 1.120 mm.

Compact dimensions.



MAINTENANCE

Easy access to all components on both sides of the machine.

Complete technical menu: statistics, autotest, data recovery for technician and maintenance.

Remote communication: faster intervention.



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.

Front feeding and return.


Built-in COOL DOWN system.

Polished steel roll Ø 650 mm.

Roll length: 2.000, 2.600 and 3.300 mm.

Electric, radiant gas and steam heating.

CE standard

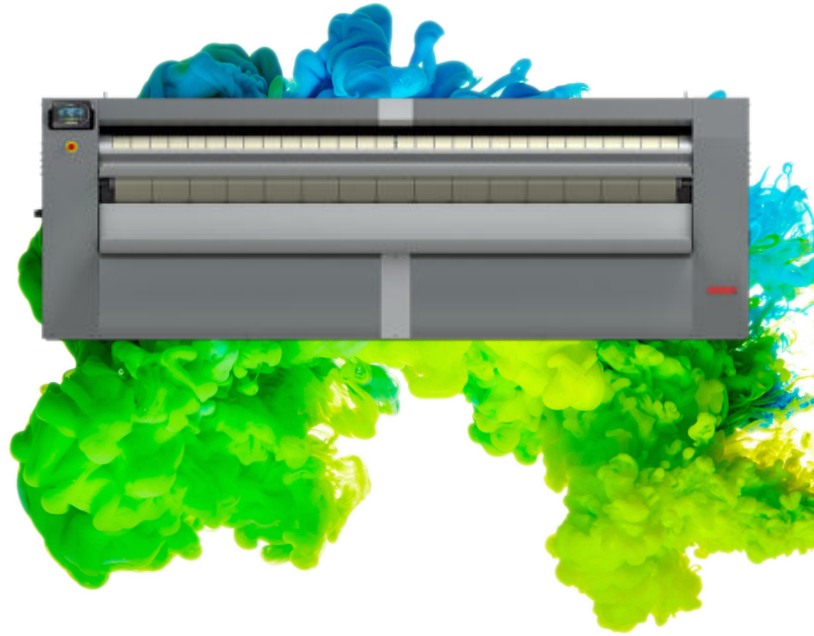

OPTIONS


- Nickel plated roll CM-3365
- Gas LPG option (Propan)
- Gas NG option (Natural Gas)
- Lengthfolder for CM- 3365 (front exit)
- Rear exit for CM-3365 (only with folder)
- Antistatic belts for CM-3365 ironers without folder
- Antistatic belts + bar for CM-3365 ironers with folder
- Maritime wooden packing for CM-3365
- Cross folder CPL-CROSS CM-3365
- 230V III 50/60Hz electric CM-3365 E
- 230V III 60Hz gas CM-3365 G
- 440V III 50/60Hz electric CM-3365 E
- 120V I 60Hz + N gas CM-3365 (Gas US)

GENERAL DATA	UNIT.	CM-3365 TOUCH II	
Electric theoretical production*	Kg/h	160	
	Lb/h	353	
Radiant gas theoretical production*	Kg/h	184	
	Lb/h	406	
Evaporation power	l/h	83	
	USgallon/h	21,9	
Roll Ø	mm	650	
	inch	25,59	
Working length	mm	3.300	
	inch	129,92	
Height floor-feeding belts	mm	1.120	
	inch	44,09	
Working speed	mt/min	0,5 - 15	
	ft/min	1,6 - 49	
Electronic control	-	YES	
No. Programs	Nº	5	
Surface contact with linen	º	310	
Length folder + rear exit	-	OPT.	
Electric theoretical production* with folder	Kg/h	112	
	Lb/h	247	
Radiant gas theoretical production* with folder	Kg/h	128	
	Lb/h	282	
Evaporation power with folder	l/h	58	
	USgallon/h	15,2	
Working speed with folder	mt/min	2 - 10	
	ft/min	6,5 - 32	
POWER			
Electric heating	Kw	72	
Total electric power (elec. mod.)	Kw	73,05	
Gas heating	Kw	78	
Total electric power (gas mod.)	Kw	1,05	
Steam heating	Kw	97	
Total electric power (steam mod.)	Kw	1,05	
Roll motor power	Kw	0,55	
Fan motor power	Kw	0,25 x2	
Additional electric power with folder option	Kw	0,56	
Additional electric power with folder + rear exit option	Kw	0,74	
CONNECTIONS		E	G / S
Tension 230V I + N + T	nº x mm²/A	-	3 x 2,5 / 10A
	nº x AWG/A	-	3 x 13 / 10A
Tension 230V III + T	nº x mm²/A	-	4 x 2,5 / 10A
	nº x AWG/A	-	4 x 13 / 10A
Tension 400V III + N + T	nº x mm²/A	5 x 25 / 125A	5 x 2,5 / 10A
	nº x AWG/A	5 x 3 / 125A	5 x 13 / 10A
Ø Gas inlet	BSP	1/2"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net / gross width	mm	4.145 / 4.445	
	inch	163,2 / 175	
Net / gross depth	mm	1.070 / 1.153	
	inch	42,1 / 45,4	
Net / gross depth with rear exit	mm	1.166 (1.488**) / 1.153	
	inch	45,9 (58,6**) / 45,4	
Net / gross height	mm	1.420 / 1.672	
	inch	55,9 / 65,8	

Net / gross weight	Kg	1.765 / 1.815
	Lb	3.891 / 4.001
Net / gross weight with folder	Kg	2.075 / 2.125
	Lb	4.575 / 4.685
Net / gross volume	m ³	6,30 / 8,57
	ft ³	222 / 303
Net / gross volume with folder	m ³	7,54 (9,32**) / 8,57
	ft ³	266 (329**) / 303
OTHERS		
Nº Fume outlet	Nº	2
Ø Extraction	mm	153
	inch	6
Airflow	m ³ /h	1.200
	cfm	706
Sound level	dB	65

* Theoretical production 45% moisture

** With open rear exit

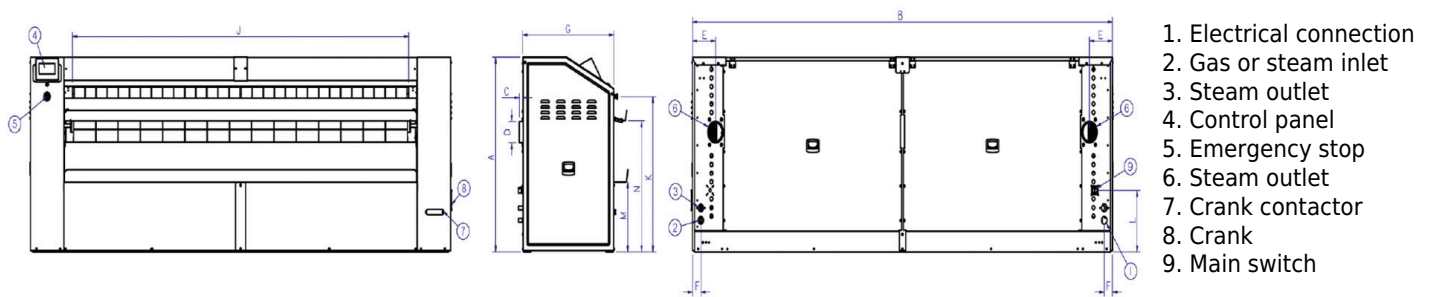

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CM-2065	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
CM-2665	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
CM-3365	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952