



## ELECTRONIC CONTROL

Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.  
Digital speed and temperature display.



## EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure.  
Automatic shutdown at 80°C (adjustable parameter).  
Fumes circulation circuit from the bottom reducing energy consumption.



## ROBUSTNESS

Roll driving by inverter.  
Nomex quality feeding and ironing belts: high temperatures resistant.  
Skinplate and stainless steel panels: long lasting.  
Coiled felt for greater lifespan.



## ERGONOMICS

Acoustic comfort: <65 dba.  
Appropriate height of feeding: 990 mm.  
Compact design: fits in many spaces.  
Electronic control with Auto mode: easy to use, optimized ironing speed.




## MAINTENANCE

Easy access to all components on both sides of the machine.  
Basic connections : electrical connection and air extraction.



## OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation.  
Front feeding and return.  
Built-in cool down system.  
Polished steel roll Ø 200mm.  
Roll length: 1.400, 1.600 and 2.000mm.  
Electric heating.  
CE standard

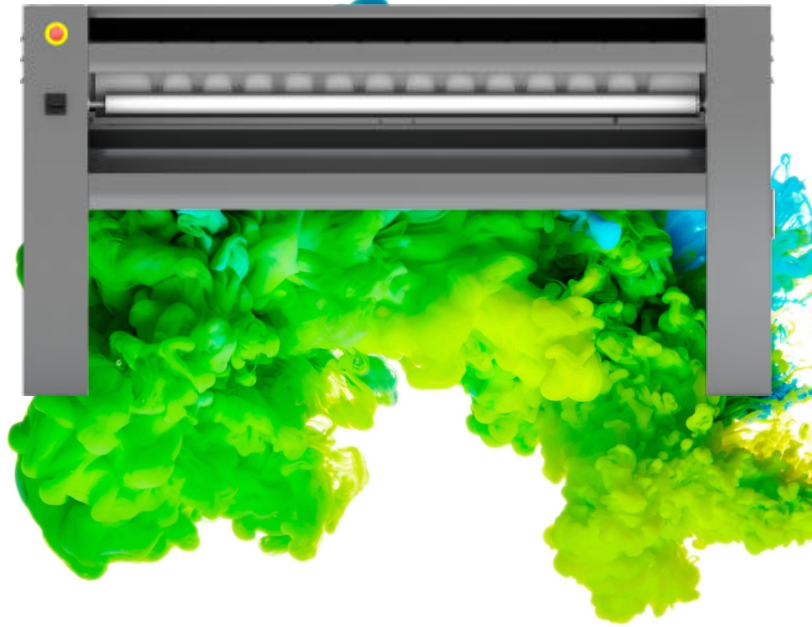


## OPTIONS

- 440V 3~ 50/60Hz No N (maritime)
- Maritime wooden packing CM-2020

GENERAL DETAILS	UNIT.	CM-2020 M	
Theoretical production Electric heating*	Kg/h	22	
	lb/h	49	
Roll Ø	mm	200	
	inch	7,87	
Working width	mm	2000	
	inch	78,7	
Height floor-feeding belts	mm	990	
	inch	39,0	
Working speed	m/min	1.5-6	
	ft/min	4.9-19.6	
Electronic control	-	Sí	
No. Programs	Nº	2	
Length folder	Nº	NO	
Large surface contact with linen	º	270	
POWER			
Electric heating power	Kw	18	
Total electric power	Kw	18,37	
Roll motor power	Kw	0,28	
Fan motor power	Kw	0,09	
CONNECTIONS		E	G
Tension 230V 1N + T	Nº x mm² / A	N/A	N/A
	nº x AWG/A	N/A	N/A
Tension 230V 3~ + T	Nº x mm² / A	4 x 10 / 50A	N/A
	nº x AWG/A	4 x 7 / 50A	N/A
Tension 400V 3~N + T	Nº x mm² / A	5 x 6 / 32A	N/A
	nº x AWG/A	5 x 9 / 32A	N/A
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	2.478 / 2.780	
	inch	97,6 / 109,4	
Net depth / gross depth**	mm	444** (666) / 770	
	inch	17.5* (26.2) / 30,3	
Net height / gross height	mm	1.110 / 1.400	
	inch	43,7 / 55,1	
Net weight / gross weight	kg	237 / 275	
	lbs	522 / 606	
Net volume / Gross volume	m³	1,22 / 3,00	
	f³	43,23 / 105,83	
OTHERS			
No. Fume outlet	Nº	1	
Ø Fume outlet	mm	83	
	inch	3,27	
Air Flow	m³/h	300	
	cfm	177	
Sound level	dB	55	
Evaporation power	l/h	9,9	
	USgallon/h	2,6	

\* 45% moisture

\*\* Rear fan disassembly

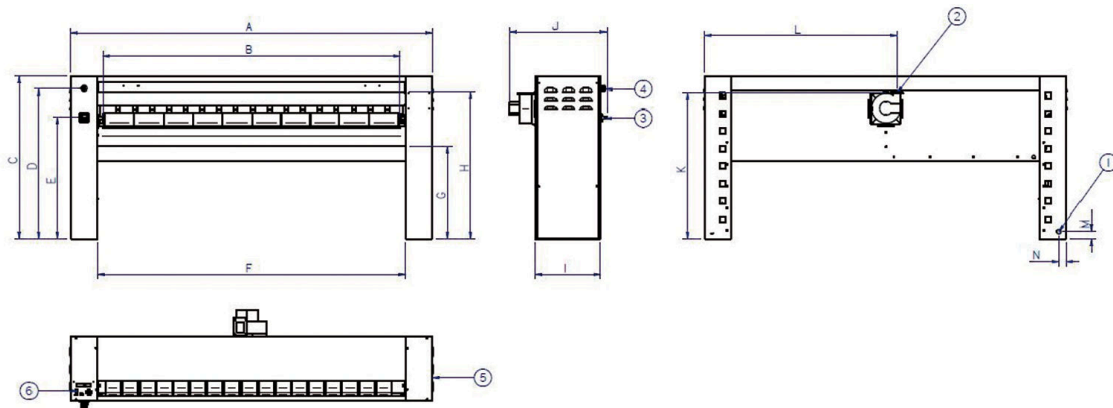

1. Electrical connection
2. Vapour extraction
3. Main switch
4. Emergency stop
5. Crank handle
6. Electrical control

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
CM-1420 M	1.878	1.470	1.110	1.028	830	1.510	631	1.006	444	666	995	1.015	50	50
CM-1620 M	2.128	1.720	1.110	1.028	830	1.760	631	1.006	444	666	995	1.141	50	50
CM-2020 M	2.478	2.070	1.110	1.028	830	2.110	631	1.006	444	666	995	1.316	50	50