

ELECTRONIC PROGRAMMER

M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.
Big fluff filter.

VERSATILITY

Make to order - Customisation
OPL > Self-service - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
Biggest door diameters.

MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS

Grey skinplate outer casing, stainless steel look.
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric or gas, except DTM2-22 only gas.
CE approved




OPTIONS

- Natural gas heated tumble dryer
- Double doorglass (order 1 unit per column)
- Screen in M programmer (2 units)
- Fluff filter with grid 0,3 mm (standard in STACK is 0,6 mm)
- Stainless steel front and side panels DTM2-14
- Maritime wooden packing DTM2-14
- Front panel in stainless steel DTM2-11/14/18
- 400V III 50Hz 11/14/18kg
- 400V III 60Hz 11/14/18/22kg
- 230V III 60Hz 11/14/18kg G
- 230V III 60Hz 11/14/18kg E
- 440V/480V III 60Hz 11/14/18/22kg (maritime)
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	DTM2-14	
Capacity 1/18		Kg	15 x2	
		lb	33,1 x2	
Capacity 1/20		Kg	13,5 x2	
		lb	29,8 x2	
Ø Drum		mm	750	
		inch	29,53	
Drum length		mm	746	
		inch	24,02	
Drum volume		l	270	
		cu ft	9,53	
Ø Door hole		mm	574	
		inch	22,60	
Door center height		mm	547 / 1.522	
		inch	21,54 / 59,92	
Height from floor to bottom of door		mm	189 / 1.164	
		inch	7,32 / 45,83	
ELECTRIC HEATING				
Evaporation capacity		L/h	17,2 x2	
		US gallon/h	4,54 x2	
Hourly output		Kg/h	34,4 x2	
		lb/h	75,8 x2	
Installed heating power		kW	12 x2	
Installed electrical power		kW	25,34	
Drum motor power		kW	0,37 x2	
GAS HEATING				
Evaporation capacity (gas model)		L/h	16,9 x2	
		US gallon/h	4,465 x2	
Hourly output (gas model)		Kg/h	33,8 x2	
		lb/h	74,5 x2	
Installed gas heating power		kcal/h	10327 x2	
		Btu/h	40945,7 x2	
Installed gas heating power		kW	12 x2	
Installed electrical power		kW	1,34	
Instant propane gas consumption (G31)		Kg/h	1,03 x2	
		lb/h	2,27 x2	
Instant natural gas consumption (G20)		m ³ /h	1,27 x2	
		cfm	0,75 x2	
Ø Gas inlet		BSPP ISO 228-1	1/2"	
VENTILATION				
Fan motor power		kW	0,25 x2	
Nominal air flow rate		m ³ /h	500 x2	
		cfm	294,28 x2	
Ø Fume exhaust		mm	200 x2	
		inch	7,78 x2	
HEAT EMISSION				
Maximum total heat emission		kW	2,4	
		Btu/h	8193,9	
Max. front heat emission		kW	1,68	
		Btu/h	5735,8	
CONNECTIONS			E	G / S
Tension 230V - I + N + T		Nº x mm ² / A	-	3 x 1,5 / 16A
Tension 230V - III + T		Nº x mm ² / A	4 x 25 / 80A	3 x 1,5 / 16A (1*)
Tension 400V - III + N + T		Nº x mm ² / A	5 x 10 / 40A	3 x 1,5 / 16A (2*)
NET DIMENSIONS / D. WITH PACKING				
Net / gross width		mm	785 / 865	
		inch	30,91 / 34,06	

Net / gross depth	mm	1.106 / 1.189
	inch	43,54 / 46,81
Net / gross height	mm	1.980 / 2.126
	inch	77,95 / 83,70
Net / gross weight	Kg	275 / 293
	lb	606,27 / 645,95
OTHERS		
Sound level	dB	64

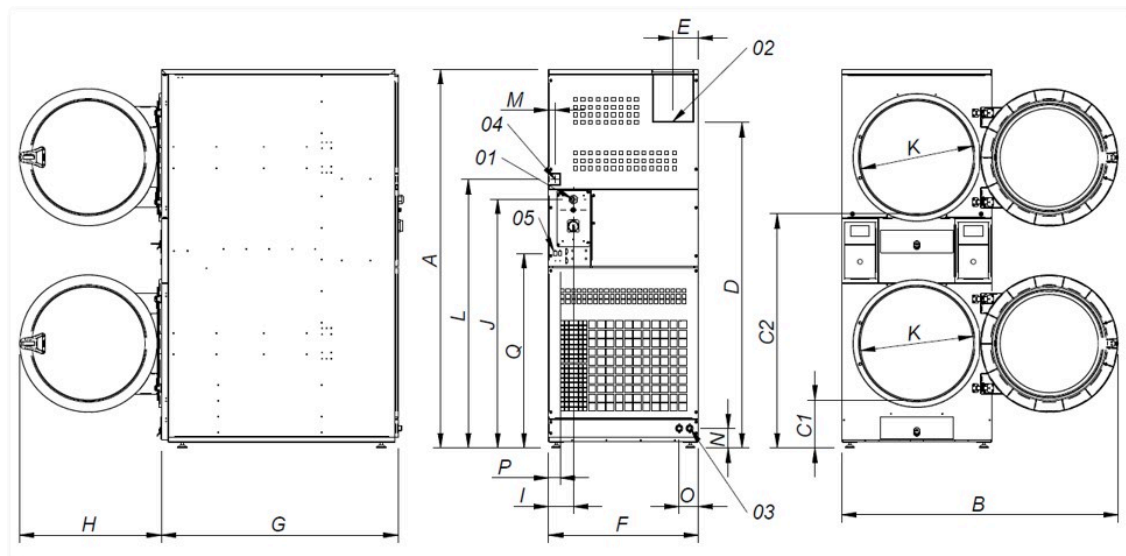

- 01 Power supply
- 02 Fumes output Ø 200
- 03 2 sprinkler valves 3/4"
- 04 Gas inlet 1/2"
- 05 Ethernet connection (only TOUCH control)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
DTM2-11	1.980	1.447	259	1.234	1.680	135	785	972	735	130	1.275	575	1.406	35	103	100	60	1.018
DTM2-14	1.980	1.447	259	1.234	1.680	135	785	1.106	735	130	1.275	575	1.406	35	103	100	60	1.018
DTM2-18	1.980	1.447	259	1.234	1.680	135	785	1.242	735	130	1.275	575	1.406	35	103	100	60	1.018