



TOUCH II

User friendly and totally programmable Touch II with 7" coloured touch screen.

USB Connection. Online platform free of charge for programming, telemetry, data analysis, etc. thanks to the IoT. Videos on displays (ads, instructions, etc.) 37 languages.



OUTSTANDING FEATURES

Reversing drum action as standard.

Stainless steel drum as standard.

Frequency inverter as standard.



EFFICIENCY

DOUBLE FLOW - Mixed axial-radial airflow.

EFFICIENT DRY: Smart humidity sensor.

Big fluff filter.

Double door glass.

Low energy consumption.



VERSATILITY

Make to order - customisation.

Wet Cleaning.

OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses.

No need of exhaust to the exterior.



CONNECTIVITY

IoT **DOMUSCONNECT**

Management of laundries: OPL and COIN.

Remote payment.



ERGONOMICS

Drawer as fluff filter, made of stainless steel.

Biggest door diameters.

Opening sense of door adjustable on site.



MAINTENANCE

Hinged panel: easy and ergonomic access.

Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance.



OTHERS

Grey skinplate outer casing, stainless steel look.

SOFT DRY - new drum with stamped holes.

COOL DOWN - anti-wrinkle at the end of the cycle.

FULL SCREEN FILTER: new filter drawer with wide surface.

CE approved.



OPTIONS


- Free license IoT - DOMUSCONNECT
- Natural gas heated tumble dryer
- Opposite door opening
- Tropicalized model
- Stainless steel front and side panels DTT-23 HP
- Front panel in stainless steel DTT-23 HP
- Maritime wooden packing DTT-23 HP
- Several payment systems for self-service

| TECHNICAL DATA | UNIT. | DTT-23 HP ECO-ENERGY |
|---|--------------------------|----------------------|
| Capacity 1/18 | Kg | 24 |
| Capacity 1/20 | Kg | 22 |
| Capacity 1/30 | Kg | 15 |
| Hourly Output* | Kg/h | 22,9 |
| Evaporation capacity* | l/h | 11,5 |
| DRUM | | |
| Ø Drum | mm | 835 |
| Drum lenght | mm | 800 |
| Drum volume | l | 440 |
| Ø Loading door | mm | 574 |
| POWER | | |
| Drum motor power | kW | 0,37 |
| Fan motor power | kW | 0,55 |
| Electric heating power ALL RANGES | kW | 3,8 + 4*** |
| Total electric power (elec. model) | kW | 8,77 |
| Electric consumption | ** kWh/l | 1,05 |
| Nominal airflow | m ³ /h | 1.200 |
| CONNEXIONS | | |
| Tension 400V - III + N + T (50 Hz) | Nº x mm ² / A | 5 x 4 / 20 |
| Heat pump inlet (cooling) | BSP | 1/2" |
| Heat pump outlet (cooling) | BSP | 1/2" |
| Drain | BSP | 3/4" |
| DIMENSIONS / DIMENSIONS WITH PACKAGING | | |
| Net width / Gross width | mm | 890 / 970 |
| Net depth / Gross depth | mm | 1.590 / 1.720 |
| Net height / Gross height | mm | 1.812 / 1.940 |
| Net weight / Gross weight | Kg | 380 / 395 |
| OTHERS | | |
| Noise level | dB | 64 |

* It may vary depending on the type of heating, filter cleanliness or extraction type

** kWh per litre of evaporated water

*** Compressor + resistances

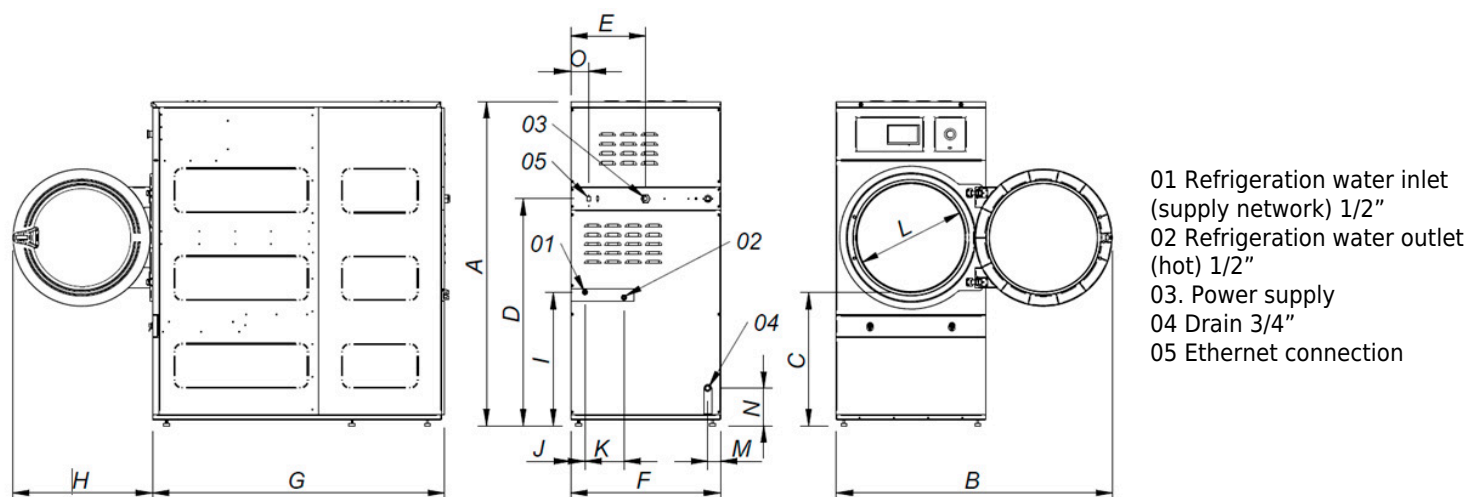

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O |
|----------------------|-------|------|-----|------|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|----|
| DTT-11 HP ECO-ENERGY | 1.694 | 1447 | 689 | 1190 | 392 | 785 | 1255 | 735 | 700 | 75 | 205 | 575 | 67 | 197 | 95 |
| DTT-18 HP ECO-ENERGY | 1.694 | 1447 | 689 | 1190 | 392 | 785 | 1525 | 735 | 700 | 75 | 205 | 575 | 67 | 197 | 95 |
| DTT-23 HP ECO-ENERGY | 1.812 | 1552 | 743 | 1190 | 445 | 890 | 1595 | 735 | 700 | 127 | 205 | 575 | 119 | 250 | 95 |