

TOUCH II

- **TOUCH II:** easy-to-use microprocessor, fully programmable with 7" touchscreen.
- Multilingual interface.
- Unlimited programmes: in addition to presets, create as many as your business needs.
- USB port: configure, update, and analyse machines without an internet connection.

EFFICIENCY

- **EFFICIENT IRON:** automatically adjusts ironing speed based on residual moisture, saving energy.
- **OPTIMAL FEEDING:** automatic ironing speed adjustment (optional).
- Excellent heat transfer thanks to the roller's material and thickness.
- Auto stop at 80 °C: extends lifespan of ironing belts.
- Gas circuit at the bottom, reducing energy consumption.
- Accurate temperature control via microprocessor: low energy use.
- Models with radiant gas burner: up to 25% more output - saving time and energy.

ROBUSTNESS

- Roller with inverter.
- Panels in skinplate.
- Ironing belts in Nomex: resistant to high temperatures.
- Nickel-plated cylinder - corrosion-resistant and longer lasting (optional).

ERGONOMICS


- Acoustic comfort: max 65 dB.
- Easy to clean, more hygienic.
- Optimal feeding height: 1,120 mm.
- LED indicator 3 ironing zones for easier operation (optional).

MAINTENANCE

- Easy access to all components on both sides of the machine.
- Connections: electrical and flue gas.
- Comprehensive technical menu: statistics, self-test, data retrieval for technicians and maintenance.
- Remote communication: rapid intervention.

VERSATILITY

- Radiant gas model: flexibility for higher output and better adaptation to high-ceiling spaces.
- Key options:
 - **SRE:** Standard rear outlet without folder (new).
 - **LF:** Front outlet with integrated folder.
 - **LFRE:** Front and rear outlet with integrated folder.
 - **CPL-CROSS:** External transverse folder.

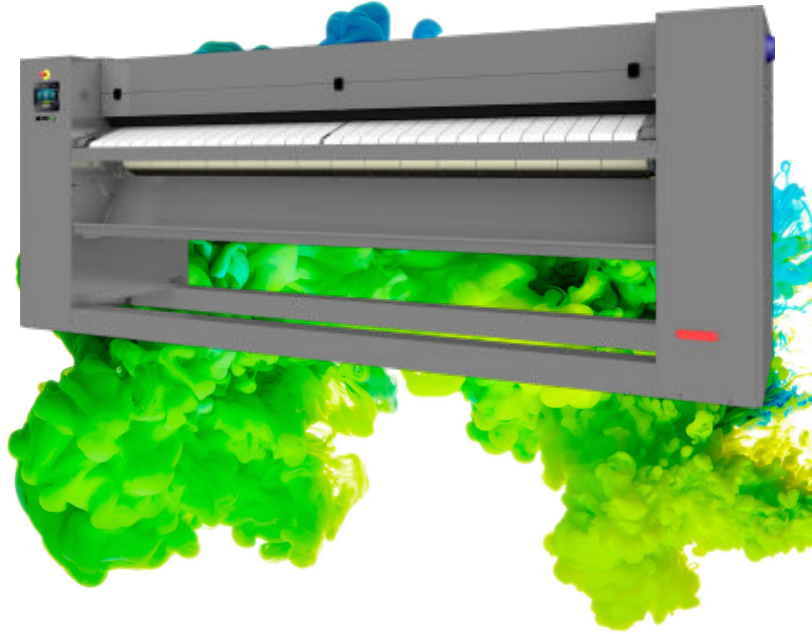


OPTIONS

- Feeding tray CF-3350
- Leveling feet kit
- 3-zone LED ironing indicator
- **EFFICIENT IRON :** humidity control
- **OPTIMAL FEEDING -** high production HPS system
- Nickel Plated roll CF-3350 E/G (not in Steam)
- Gas LPG option (Propan) for radiant gas model
- Gas NG option (Natural Gas) for radiant gas model
- Built-in lengthfolder CF-3350 (front exit)
- Built-in lengthfolder + rear and front exit CF-3350
- Rear exit without folder CF-3350
- Cross folder CPL-CROSS CF-3350
- No drop tray (laundry recovery) CF-3350
- Antistatic belts for CF-3350 without folder
- Antistatic ironing belts + bar CF-3350 for folder
- Maritime wooden packing CF-3350
- 230V 3~ 50/60Hz CF-3350 E
- 230V 3~ 60Hz CF-3350 G
- 440V 3~ 50/60Hz CF-3350 E (marine)
- 120V 1~ + N 60Hz CF-3350 G (Gas US)

GENERAL DETAILS	UNIT.	CF-3350 TOUCH II	
Theoretical output Electric, steam and atmo. gas heating* standard mod. front or rear exit	Kg/h	115	
	lb/h	254	
Theoretical output Electric, steam and atmo. gas heating* mod. Folder front exit	Kg/h	81	
	lb/h	177	
Theoretical output Electric, steam and atmo. Gas heating* mod. Folder front and rear exit	Kg/h	75	
	lb/h	165	
Theoretical production Radiant gas heating* mod standard front or rear exit	Kg/h	138	
	lb/l	304	
Theoretical production Radiant gas heating* mod folder front exit	Kg/h	97	
	lb/l	213	
Theoretical production Radiant gas heating* mod folder front and rear exit	Kg/h	90	
	lb/l	198	
Roll Ø	mm	500	
	inch	19,69	
Working width	mm	3.300	
	inch	129,92	
Height floor-feeding belts	mm	1.170	
	inch	46,06	
Working speed standard mod.	m/min	0,5 - 8	
	ft/min	1,6 - 26	
Working speed mod. with folder	m/min	2 - 8	
	ft/min	6,5 - 26	
Electronic control	-	TOUCH II	
No. Programs	-	5	
Lenght folder	-	OPT.	
Rear exit	-	OPT.	
Large surface contact with linen	-	305°	
POWER			
Roll motor power	Kw	0,41	
Fan motor power	Kw	0,5	
Electric mod.: heating power	Kw	54	
Electric mod: Total electric power	Kw	54,91	
Gas mod.: heating power	Kw	69	
Gas mod.: total electric power	Kw	0,91	
Steam mod.: heating power	Kw	81	
Steam mod.: total electric power	Kw	0,91	
Steam consumption	Kg/h	85	
Additional electric power standard mod. Rear exit	Kw	0,28	
Additional electric power mod with folder front exit	Kw	0,56	
Additional electric power mod with folder front and rear exit	Kw	0,66	
CONNECTIONS		E	G/S
Tension 230V - I + N + T	Nº x mm² / A	N/A	3 x 2,5 / 10A
	nº x AWG/A	N/A	3 x 13 / 10A
Tension 230V - III + T	Nº x mm² / A	4 x 35 160A	4 x 2,5 / 10A
	nº x AWG/A	4 x 2 160A	4 x 13 / 10A
Tension 400V - III + N + T	Nº x mm² / A	5 x 25 / 100A	5 x 2,5 / 10A
	nº x AWG/A	5 x 3 / 100A	5 x 13 / 10A
Ø Gas inlet	BSP	1"	
Ø Steam inlet	BSP	3/4"	
Ø Condensed (Steam models)	BSP	1/2"	
OVERALL DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	4410 / 4590	
	inch	173,6 / 180,7	
Net depth (with rear exit open) / gross depth	mm	1175 (1507) / 1360	
	inch	46,3 (59,3) / 53,5	
Net height / gross height	mm	1780 / 1940	
	inch	70,1 / 76,4	

Net weight / gross weight standard mod.	kg	1630 / 1730
	lbs	3594 / 3814
Net weight / gross weight standard mod. with rear exit	kg	1680 / 1780
	lbs	3704 / 3924
Net weight / gross weight mod. Folder front exit	kg	1760 / 1860
	lbs	3880 / 4101
Net weight / gross weight mod. Folder front and rear exit	kg	1840 / 1940
	lbs	4057 / 4277
Net volume (with rear exit) / Gross volume	m ³	9,22 (11,32) / 12,11
	f ³	326 (399,9) 428
OTHERS		
No. Fume outlet	Nº	2
Ø Fume outlet	mm	153
	inch	6,0
Air Flow	m ³ /h	1.200
	cfm	706
Sound level	dB	65
Evaporation power standard mod.	l/h	62
	USgallon/h	16,4
Evaporation power mod. Folder front exit	l/h	43
	USgallon/h	11,5
Evaporation power mod. Folder front and rear exit	l/h	40
	USgallon/h	10,7

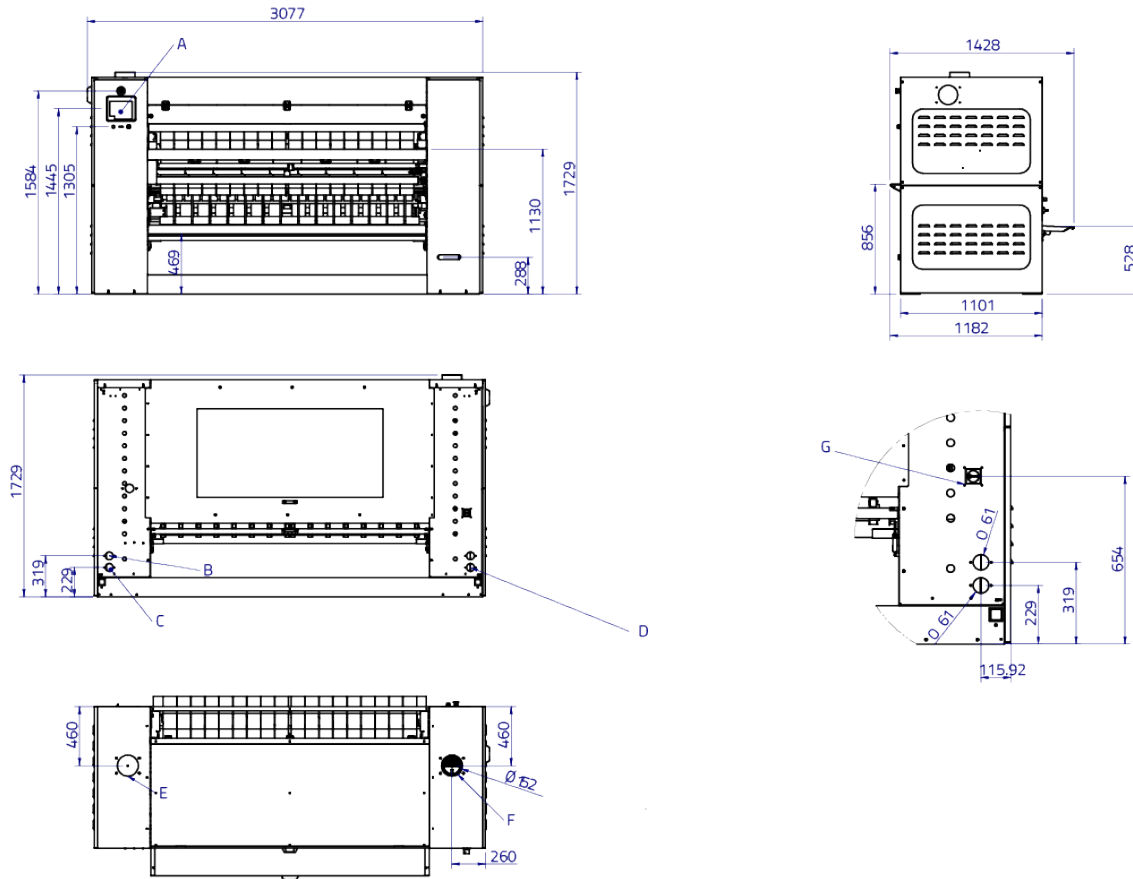

- A. Touch-screen control tablet
- B. Steam outlet ø1/2" male
- C. Gas inlet ø22 or steam ø3/4" male
- D. Electrical inlet
- E. NO EXHAUST
- F. (Exhaust) ø152 external
- G. Isolator