

ECOTANK tanks are the ideal solution for optimising water consumption in your laundry.

Perfect for businesses with limited space and smaller machines.

 **OUTSTANDING FEATURES**

80 and 150 litre tanks to save a large amount of water in small spaces.

In column: each washer or barrier can have 1, 2 or 3 tanks in column.

Resistant: Made of high density polyethylene and external reinforcement with skinplate panel structure, stainless steel aesthetics.

Interior with rounded corners design to prevent dirt accumulation and facilitate cleaning.

 **EFFICIENCY**

We saves water: thanks to the reuse of water at different stages of the washing and rinsing process.

We saves energy: by reducing the demand for conventional pumping and pressure systems, processes that require a considerable amount of energy.

We saves chemicals: by optimising the use of water in different phases of the wash, ECOTANKS reduce the need for chemicals to treat the water, taking advantage of its purity in each cycle.

 **EASY MAINTENANCE**

Plug and play: Easy to connect and install to washing machines with TOUCH II control.

2 water level sensors in each ECOTANK.

Self-cleaning tanks with pre-set programmes (with TOUCH II equipped washers).

Removable tanks for easy cleaning and maintenance.

 **OTHERS**

Grey skinplate panels.

High density polyethylene tanks.

2 water level sensors in each tank.

MACHINES THAT CAN BE CONNECTED TO ECOTANK

80l. tanks for:

- 11 to 18kg washers
- 16kg barriers


150l. tanks for:

- 22 to 28kg washers
- 22kg barriers

**OPTIONS**

- Kit ready for ECOTANK conn. 3/4" for barriers ASM-16
- Kit ready for ECOTANK conn. 3/4" for barriers ASM-22
- Kit ready for ECOTANK conn. 3/4" for washers DLS/DHS-11/14/18/22/28

| WATER RECOVERY TANK | | UNIT. | WREC-150 T3 |
|-------------------------------------|--|----------------|-----------------|
| Tanks capacity | | l | 150x3 |
| Front-load washing machine capacity | | Kg | 27, 35 |
| Front-load washing machine barrier | | Kg | 27, 35 |
| Outdoor furniture | | - | skinplate |
| CONNECTIONS | | | |
| Tension | | V | 230V I |
| Drain Ø | | inch | 3/4" |
| DIMENSIONS / PACKING DIMENSIONS | | | |
| Net width / Gross width | | mm | 551 / 570 |
| Net depth / Gross depth | | mm | 1.272,6 / 1.350 |
| Net height / Gross height | | mm | 1.437,8 / 1.850 |
| Net weight / Gross weight | | Kg | 80 / 100 |
| Volume | | m ³ | 1,424 |

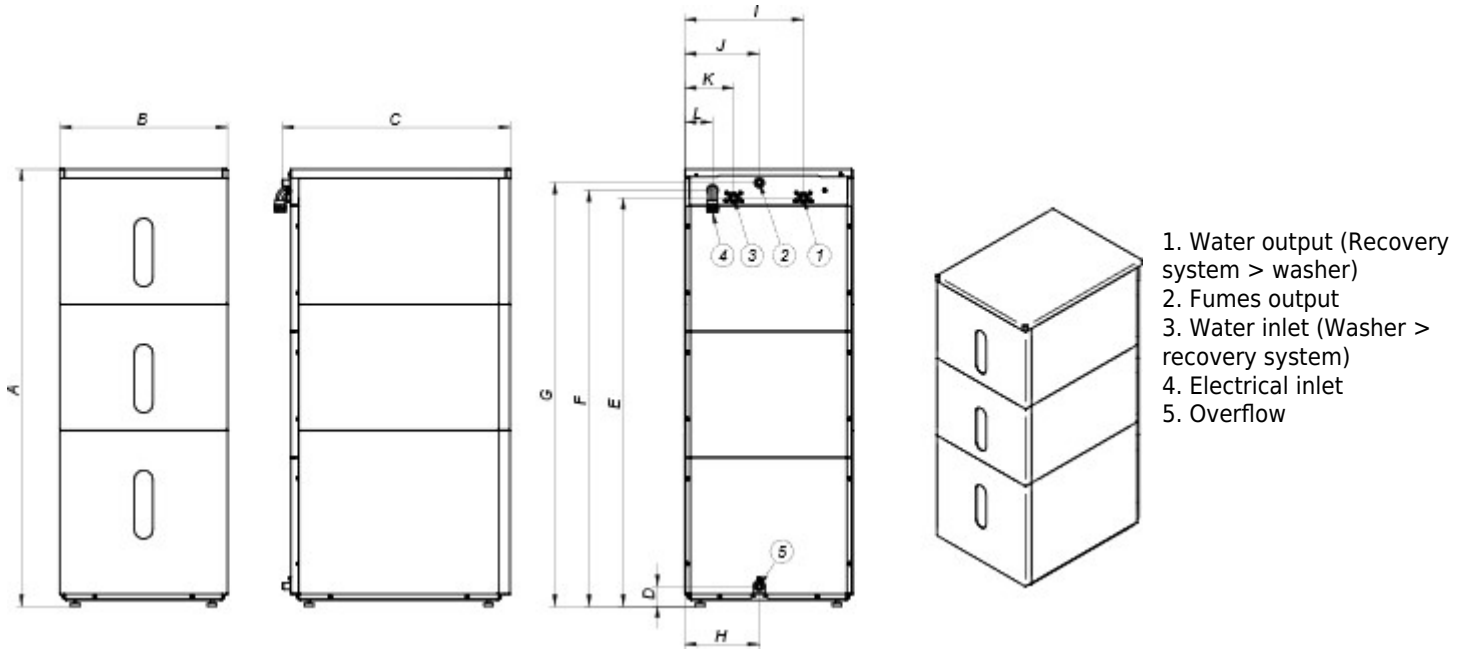

| | A | B | C | D | E | F | G | H | I | J | K | L |
|-------------|--------|-----|--------|------|--------|--------|--------|-----|-----|-----|-----|----|
| WREC-150 T3 | 1437,8 | 551 | 1272,6 | 65,5 | 1343,5 | 1368,5 | 1393,5 | 245 | 390 | 245 | 161 | 91 |