

## TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.  
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
Videos show on display: ads, instructions, (useful for coin laundry).  
37 languages.

## OUTSTANDING FEATURES

Reversing drum action as standard.  
Stainless steel drum as standard.  
Frequency inverter as standard.

## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.  
Big fluff filter.

## VERSATILITY

Make to order - customisation.  
Wet Cleaning.  
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry uses (DTT-11 to DTT-35).

## CONNECTIVITY

IoT - **DOMUSCONNECT** standard.  
Management of laundries: OPL and self-service.  
Remote payment (coin laundry).

## ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
Biggest door diameters.  
Opening sense of door adjustable on site.

## MAINTENANCE

Control panel: easy access.  
Technical menu: statistics for technicians.  
Easy access to parts for reparability.

## OTHERS

Grey skinplate outer casing, stainless steel look.  
**NEW:** Geared motor drive on models DTT-45 to DTT-80  
SOFT DRY - new drum with stamped holes.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric, gas and steam.  
CE approved




## OPTIONS

- License IoT - DOMUSCONNECT
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double doorglass DTT-11/14/18/22
- Fire extinguisher SFEX DTT-22/28
- Opposite door opening DTT-11-35
- Tropicalized model
- Dosing-spraying
- Back panel with air filter DTT-11 to DTT-35
- Fluff filter with grid 0,6 mm (standard is 0,3 mm)
- Fluff filter with grid 1,2 mm (standard is 0,3 mm)
- Front and side panels in AISI 304 stainless steel DTT-22
- Front panel in AISI 304 stainless steel DTT-22
- Steam battery in stainless steel DTT-22
- Low pressure steam battery DTT-22
- Maritime wooden packing DTT-22
- 400V 3N 60 Hz DTT-11-35
- 230V 3~ 50 Hz DTT-22/28/35 E
- 230V 3~ 60 Hz DTT-22/28/35 E
- 230V 3~ 60 Hz DTT-11-35 G/S
- 440/480V 3~ 60 Hz DTT-22/28/35 (marine)
- Several payment systems for self-service

| CAPACITY & DRUM                              | UNIT.                    | DTT-22     |
|--|--------------------------|------------|
| Capacity 1/18                                | Kg                       | 24,4       |
|  | lb                       | 53,9       |
| Capacity 1/20                                | Kg                       | 22,0       |
|  | lb                       | 48,5       |
| Ø Drum                                       | mm                       | 835        |
|  | inch                     | 32,87      |
| Drum length                                  | mm                       | 800        |
|  | inch                     | 31,5       |
| Drum volume                                  | l                        | 440        |
|  | cu ft                    | 15,54      |
| Ø Door hole                                  | mm                       | 574        |
|  | inch                     | 22,60      |
| Door center height                           | mm                       | 1.030      |
|  | inch                     | 40,55      |
| Height from floor to bottom of door          | mm                       | 672        |
|  | inch                     | 26,46      |
| ELECTRIC HEATING                             |                          |            |
| Evaporation capacity                         | L/h                      | 17         |
|  | US gallon/h              | 4,5        |
| Hourly output                                | Kg/h                     | 34         |
|  | lb/h                     | 75         |
| Installed heating power                      | kW                       | 24         |
| Installed electrical power                   | kW                       | 24,97      |
| GAS HEATING                                  |                          |            |
| Evaporation capacity (gas model)             | L/h                      | 20         |
|  | US gallon/h              | 5,283      |
| Hourly output (gas model)                    | Kg/h                     | 40         |
|  | lb/h                     | 88,2       |
| Installed gas heating power                  | kcal/h                   | 26655      |
|  | Btu/h                    | 105776     |
| Installed gas heating power                  | kW                       | 31         |
| Installed electrical power                   | kW                       | 0,97       |
| Instant propane gas consumption (G31)        | Kg/h                     | 2,66       |
|  | lb/h                     | 5,86       |
| Instant natural gas consumption (G20)        | m <sup>3</sup> /h        | 3,28       |
|  | cfm                      | 1,93       |
| Ø Gas inlet                                  | BSPP ISO 228-1           | 1/2"       |
| STEAM HEATING                                |                          |            |
| Installed steam heating power                | kW                       | 49,20      |
|  | Btu/h                    | 167877     |
| Installed electrical power                   | kW                       | 0,97       |
| Steam consumption (8 barG) - Standard        | kg/h                     | 87         |
| Steam consumption (116 psiG)                 | lb/h                     | 104,8      |
| Steam pressure                               | barG                     | 6 - 9      |
|  | psiG                     | 87 - 130,5 |
| Standard steam inlet - outlet                | BSPT- ISO7.1             | 1"         |
| Standard steam inlet - outlet                | NPT ANSI B1.20.1 Tapered | 1"         |
| Steam consumption (5 barG) - Low Pressure    | kg/h                     | -          |
| Steam consumption (72,5 psiG) - Low Pressure | lb/h                     | -          |
| Steam pressure (low pressure)                | barG                     | 3 - 6      |
|  | psiG                     | 43,5 - 93  |
| Low pressure steam inlet - outlet            | BSPT- ISO7.1             | 1"         |
| THERMAL OIL HEATING                          |                          |            |
| Installed heating power                      | kW                       | -          |
| Installed electrical power                   | kW                       | -          |
| Fluid consumption (T max 175°C)              | m <sup>3</sup> /h        | -          |
| Thermal oil connection                       | BSP                      | -          |

| POWER AND VENTILATION                        |  |                          |               |   |               |
|--|--|--------------------------|---------------|---|---------------|
| Drum motor power                             |  | kW                       | 0,37          |   |               |
| Fan motor power                              |  | kW                       | 0,55          |   |               |
| Nominal air flow rate                        |  | m <sup>3</sup> /h        | 1.200         |   |               |
|  |  | cfm                      | 706           |   |               |
| Ø Fume exhaust                               |  | mm                       | 200           |   |               |
|  |  | inch                     | 7,87          |   |               |
| HEAT EMISSION                                |  |                          |               |   |               |
| Maximum total heat emission                  |  | kW                       | 2,4           |   |               |
|  |  | Btu/h                    | 8194          |   |               |
| Max. front heat emission                     |  | kW                       | 1,7           |   |               |
|  |  | Btu/h                    | 5736          |   |               |
| CONNECTIONS                                  |  |                          |               |   |               |
| Tension 230V - I + N + T                     |  | Nº x mm <sup>2</sup> / A | -             | E | G / S         |
| Tension 230V - III + T                       |  | Nº x mm <sup>2</sup> / A | 4 x 25 / 80A  |   | 3 x 1,5 / 16A |
| Tension 400V - III + N + T                   |  | Nº x mm <sup>2</sup> / A | 5 x 10 / 40A  |   | 3 x 1,5 / 16A |
| NET DIMENSIONS / D. WITH PACKING             |  |                          |               |   |               |
| Net / gross width                            |  | mm                       | 890 / 970     |   |               |
|  |  | inch                     | 35 / 38,2     |   |               |
| Net / gross depth                            |  | mm                       | 1.255 / 1.345 |   |               |
|  |  | inch                     | 49,4 / 53     |   |               |
| Net height / gross height (without heating*) |  | mm                       | 1.812 / 1.940 |   |               |
|  |  | inch                     | 71,3 / 76,4   |   |               |
| Net / gross weight                           |  | Kg                       | 210 / 230     |   |               |
|  |  | lb                       | 463 / 507     |   |               |
| OTHERS                                       |  |                          |               |   |               |
| Sound level                                  |  | dB                       | 65            |   |               |

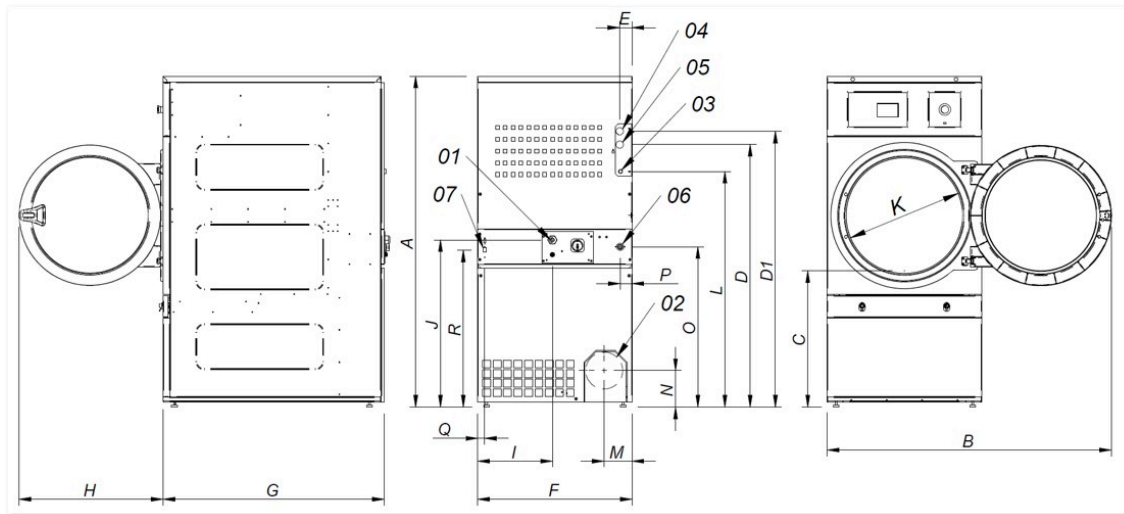

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (DTT-11-14-18)
- 04 Steam inlet 1" (DTT-22)
- 05 Condensate outlet 3/4" (DTT-11-14-18)
- 05 Condensate 1" (DTT-22)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

|        | A     | B     | C   | D     | D1    | E   | E1 | F   | G     | H   | I   | J   | K   | L     | M   | N   | O   | P  | Q  | R   |
|--------|-------|-------|-----|-------|-------|-----|----|-----|-------|-----|-----|-----|-----|-------|-----|-----|-----|----|----|-----|
| DTT-18 | 1.694 | 1.447 | 689 | 1.354 | 1.422 | 68  | 68 | 785 | 1.125 | 735 | 380 | 870 | 575 | 1.226 | 133 | 180 | 830 | 65 | 35 | 805 |
| DTT-22 | 1.812 | 1.552 | 743 | 1.430 | 1.532 | 112 | 55 | 890 | 1.255 | 735 | 107 | 920 | 575 | 1.344 | 238 | 180 | 885 | 65 | 37 | 860 |