

### VERSATILITY

OPL <> COIN: Standard models can be programmed as OPL or coin laundry version, central pay, etc.  
 SINGLE <> STACKED: Models can be stacked on top of a washer or on another dryer.  
 Control panels can be assembled between both drums for better ergonomics.  
 Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.  
 New gas heated models.

### OUTSTANDING FEATURES

M PROGRAMMER: selection of time and temperature, user friendly and versatile (OPL or coin laundry version).  
 Reduced drying times (less than 45 minutes).  
 Electric heating only 4,5 kW.

### EFFICIENCY

Optimised airflow.  
 Wide fluff filter as drawer.  
 Efficient design.

### ROBUSTNESS

White lacquered in HPDL model.  
 Robust aluminium big door.  
 Drawer as fluff filter (not in the door but as a specific drawer).  
 Industrial fan and powerful airflow.  
 Sturdy construction of the dryer structure and panels.

### OTHERS

Galvanized drum.  
 Models with electric or gas heating.  
 FULL SCREEN FILTER: drawer fluff filter, not in the door.  
 Models with electric or gas heating.  
 HPDL model available in two versions: three-phase model or single-phase model (non-convertible).



### OPTIONS

- Several payment systems for self-service
- 400V 3 / 230 I / 3 60 Hz No HPI
- 440-480V 3~ 60 Hz (marine)


CAPACITY & DRUM	UNIT.	HPDL-10 M E MONO
Capacity 1/18	Kg	11,1
	lb	24,5
Capacity 1/20	Kg	10
	lb	22
Ø Drum	mm	590
	inch	23,2
Drum length	mm	690
	inch	27,2
Drum volume	l	200
	cu ft	7,06
Ø Door hole	mm	480
	inch	18,9
Door center height	mm	554
	inch	21,8
Height from floor to bottom of door	mm	250
	inch	9,84
ELECTRIC HEATING		
Evaporation capacity	L/h	6,35
	US gallon/h	1,68
Hourly output	Kg/h	12,5
	lb/h	27,56
Installed heating power	kW	4,5 (1)
Installed electrical power	kW	4,92 (1)
Drum motor power	kW	0,37 (2)
GAS HEATING		
VENTILATION		
Fan motor power	kW	0,37(2)
Nominal air flow rate	m <sup>3</sup> /h	300
	cfm	177
Ø Fume exhaust	mm	100
	inch	3,94
HEAT EMISSION		
Maximum total heat emission	kW	0,5
	Btu/h	1536
Max. front heat emission	kW	0,3
	Btu/h	1075
CONNECTIONS		
Tension 230V - I + N + T	Nº x mm <sup>2</sup> / A	3 x 10 / 40A
Tension 230V - III + T	Nº x mm <sup>2</sup> / A	4 x 4 / 25A
Tension 400V - III + N + T	Nº x mm <sup>2</sup> / A	5 x 2,5 / 16A
NET DIMENSIONS / D. WITH PACKING		
Net / gross width	mm	680 / 710
	inch	26,8 / 28
Net / gross depth	mm	775 / 832
	inch	30,5 / 32,8
Net / gross height	mm	1.056 / 1.141
	inch	41,6 / 44,9
Net / gross weight	Kg	93 / 111
	lb	204 / 245
OTHERS		
Sound level	dB	62

(1) Configurable by means of a terminal system.

(2) It is a single motor for drum and fan.

(3) Connecting 2 phases and ground

(4) Connecting phase, neutral and ground

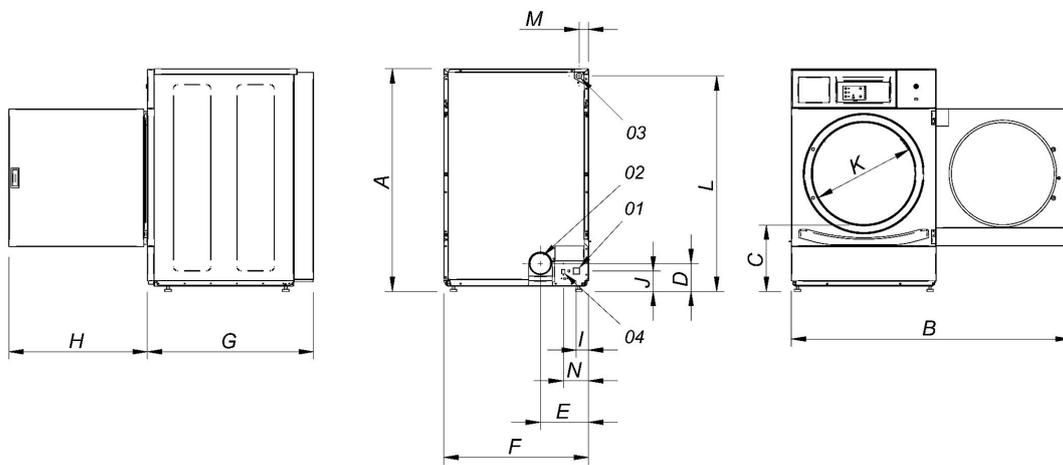

- 01 Power supply
- 02 Fumes output Ø 100
- 03 Gas inlet 1/2"
- 04 Ethernet connection (only TOUCH control)

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
HPDL-10 M E MONO	1.056	1.227	320	140	226	680	775	615	57	91	480	1.015	50	118