

VERSATILITY

OPL <> COIN: Standard models can be programmed as OPL or coin laundry version, central pay, etc.
 SINGLE <> STACKED: Models can be stacked on top of a washer or on another dryer.
 Control panels can be assembled between both drums for better ergonomics.
 Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.
 New gas heated models.

OUTSTANDING FEATURES

M PROGRAMMER: selection of time and temperature, user friendly and versatile (OPL or coin laundry version).
 Reduced drying times (less than 45 minutes).
 Electric heating only 4,5 kW.

EFFICIENCY

Optimised airflow.
 Wide fluff filter as drawer.
 Efficient design.

ROBUSTNESS

White lacquered in HPDL model.
 Robust aluminium big door.
 Drawer as fluff filter (not in the door but as a specific drawer).
 Industrial fan and powerful airflow.
 Sturdy construction of the dryer structure and panels.

OTHERS


Galvanized drum.
 Models with electric or gas heating.
 FULL SCREEN FILTER: drawer fluff filter, not in the door.
 Models with electric or gas heating.
 HPDL model available in two versions: three-phase model or single-phase model (non-convertible).



OPTIONS

- Natural gas heated tumble dryer
- Fire suppression system SFEX (only TOUCH II models)
- Plinth for better ergonomics HPW-HPD
- Plinth for better ergonomics in stainless steel for HPW-HPD
- Drum stainless steel AISI 304
- Outer casing stainless steel
- Reverse door opening
- Control panel mounted below (stacked dryer)
- Order HPL in complete container + compact packing (CHECK PRICE)
- 400V III /230 I/III 60Hz
- 440-480V III no N 50/60Hz (maritime)
- Several payment systems for self-service

CAPACITY & DRUM		UNIT.	HPDL-10 M E MONO
Capacity 1/18		Kg	11,1
		lb	24,5
Capacity 1/20		Kg	10
		lb	22
Ø Drum		mm	590
		inch	23,23
Drum length		mm	690
		inch	27,17
Drum volume		l	200
		cu ft	7,06
Ø Door hole		mm	480
		inch	18,90
Door center height		mm	554
		inch	21,81
Height from floor to bottom of door		mm	250
		inch	9,84
ELECTRIC HEATING			
Evaporation capacity		L/h	6,35
		US gallon/h	1,68
Hourly output		Kg/h	12,5
		lb/h	27,6
Installed heating power		kW	4,5 (1)
Installed electrical power		kW	4,92 (1)
Drum motor power		kW	0,37 (2)
VENTILATION			
Fan motor power		kW	0,37(2)
Nominal air flow rate		m ³ /h	300
		cfm	176,57
Ø Fume exhaust		mm	100
		inch	3,94
HEAT EMISSION			
Maximum total heat emission		kW	0,45
		Btu/h	1536,4
Max. front heat emission		kW	0,32
		Btu/h	1075,5
CONNECTIONS			
			E
Tension 230V - I + N + T		Nº x mm ² / A	3 x 10 / 40A
Tension 230V - III + T		Nº x mm ² / A	4 x 4 / 25A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 2,5 / 16A
NET DIMENSIONS / D. WITH PACKING			
Net / gross width		mm	680 / 710
		inch	26,77 / 27,95
Net / gross depth		mm	775 / 832
		inch	30,51 / 32,76
Net / gross height		mm	1.056 / 1.141
		inch	41,57 / 44,92
Net / gross weight		Kg	92,6 / 104,1
		lb	204,15 / 229,50
OTHERS			
Sound level		dB	62

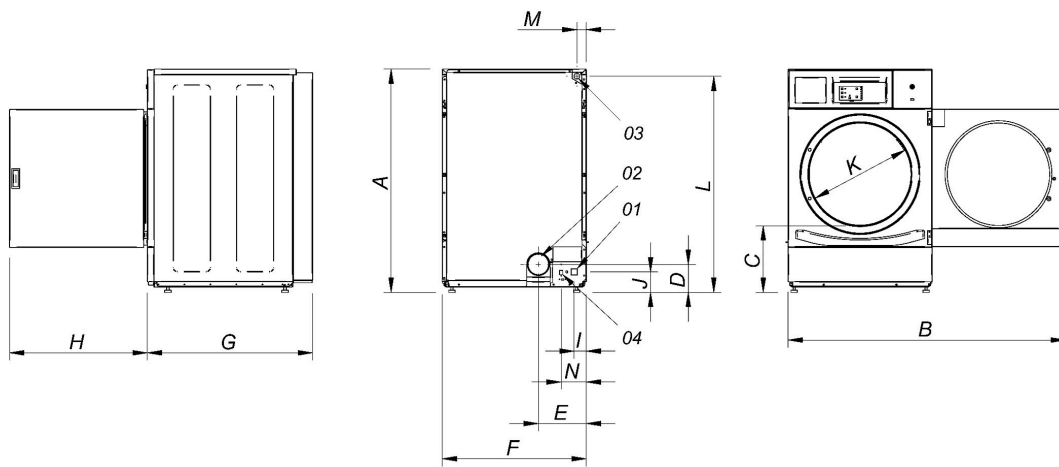

- 01 Power supply
- 02 Fumes output Ø 100
- 03 Gas inlet 1/2"
- 04 Ethernet connection (only TOUCH control)

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
HPDL-10 M E MONO	1.056	1.227	320	140	226	680	775	615	57	91	480	1.015	50	118