



ELECTRONIC CONTROL

Selection between 4 temperatures.
Preset ironing speeds, not adjustable.
No display.



EFFICIENCY

Acoustic comfort: 50-60 dB max.
Minimum space requirement: space saving, suitable for small spaces.
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels.



ROBUSTNESS

Nomex quality coating: resistant to high temperatures (option, standard on ECO-ENERGY).
Panels in grey Skinplate and stainless steel.
Wooden feeding board.
Industrial components, more durable.



OUTSTANDING FEATURES

Large roll contact area with the linen.
Roll lifting control by pedal or automatic roll lifting control by foot cell detection.

Two available models:

- **Standard**: roll with cotton polyester coating.
- **Nomex**: roll with Nomex coating.




MAINTENANCE

Easy installation: requires only an electrical connection.
Easy access on both sides for maintenance.
Quick and easy dismantling of bearings.



OTHERS


Front feed and return.
Roll ø 180 mm.
Working widths: 1.000mm and 1.200mm.
Electric heating.
CE certification

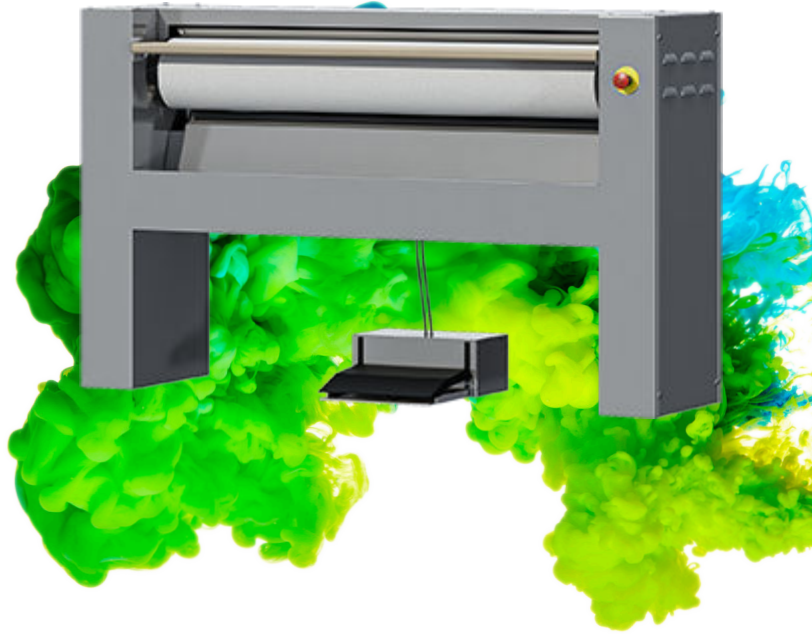

OPTIONS

- Speed control (except ECO-ENERGY)
- 230V 1 + N 50Hz (except 250mm and ECO-ENERGY)
- 230V 1 + N 60Hz (except 250mm and ECO-ENERGY)
- 230V 3 + N + T 50Hz (250mm)

GENERAL DETAILS		UNIT.	PR-1218 NOMEX
Theoretical production: 20-25 humidity		Kg/h	20
		Lb/h	44,09
Roll Ø		mm	180
		inch	7,09
Working width		mm	1.200
		inch	47,24
Working speed		m/min	2.02
		ft/mn	6,62
Electronic control		-	YES
Chest motion		-	Manual
POWER			
Heating power		Kw	4
Roll motor power		Kw	0,03
Total electric power		Kw	4,03
CONNEXIONS			
Tension 230 V I + N + T		nº x mm²/A	3 x 4 / 20A
		nº x AWG/A	3 x 11 / 20A
Tension 230 V III + T		nº x mm²/A	-
		nº x AWG/A	-
Tension 400 V III + N + T		nº x mm²/A	-
		nº x AWG/A	-
DIMENSIONS			
Net / gross width		mm	1.570 / 1.690
		inch	62 / 67
Net / gross depth		mm	438 / 540
		inch	17,24 / 21,26
Net / gross height		mm	952 / 1.130
		inch	37,48 / 44,49
Net / gross weight		Kg	90 / 110
		Lb	198,42 / 242,51
Net / gross volume		m³	0,65 / 1,03
		ft³	22,95 / 36,37
OTHERS			
No. Fume outlet		Nº	-
Ø Fume outlet		mm	-
		inch	-
Air flow		m³/h	-
		cfm	-
Noise Level		dB	55

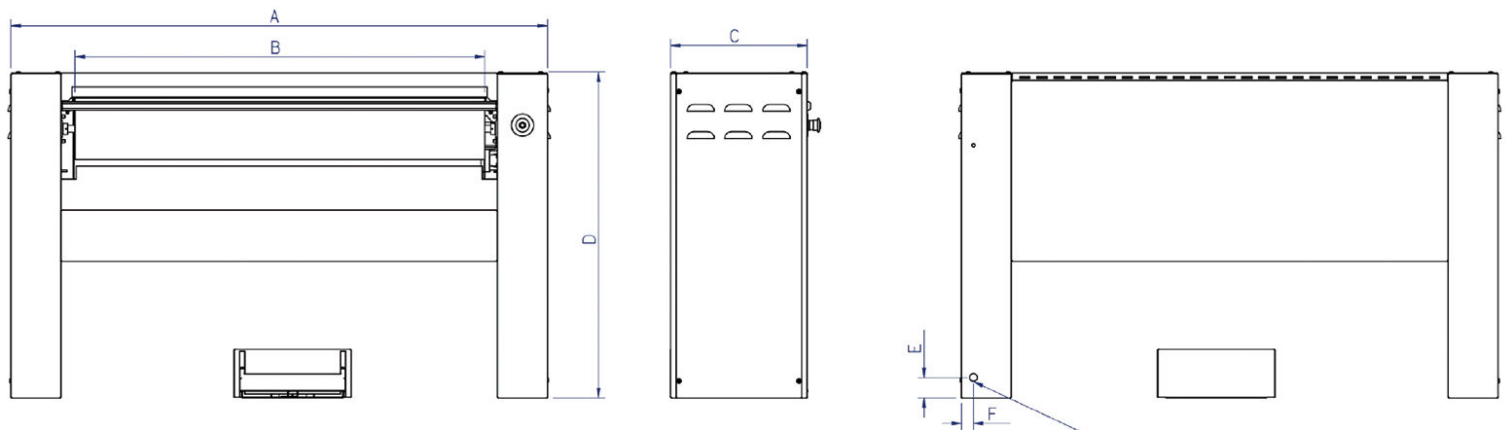

1. Electrical connection

	A	B	C	D	E	F
PR-1018 NOMEX	1.694	1.447	689	1.354	68	785
PR-1218 NOMEX	1.694	1.447	689	1.354	68	785