

TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.
USB Connection.
Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
Videos shown on display: ads, instructions (useful for coin laundry).
37 languages.

OUTSTANDING FEATURES

Reversing drum action as standard.
Stainless steel drum as standard.
Frequency inverter as standard.

EFFICIENCY

EFFICIENT DRY - Intelligent humidity control, with new drum inlet temperature control.
AIR RE-CYCLE - Efficient air recirculation system.
THERMAL INSULATION - Complete air-flow circuit and double door glass.
FULL FLOW - Optimized system with mixed airflow.
Big fluff filter.

VERSATILITY

Make to order - customisation.
Wet Cleaning.

CONNECTIVITY

Standard IoT **DOMUSCONNECT**.
Management for laundries: OPL and self-service.

ERGONOMICS

Drawer as fluff filter, stainless steel mesh.
Biggest door diameters.
Opening sense of door adjustable on site.

MAINTENANCE

Control panel: easy and access.
Technical menu: statistics for technicians.

OTHERS

Grey skinplate outer casing, stainless steel look.
NEW: Geared motor drive on models DTT-45 to DTT-80
SFEX - Integrated Fire Extinguishing System.
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: electric, gas and steam.
CE approved




OPTIONS

- License IoT - DOMUSCONNECT
- Natural gas heated tumble dryer
- Opposite door opening DTT-11 to DTT-35
- Tropicalized model
- Back panel with air filter DTT-11 to 35
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Front and side panels in AISI 304 stainless steel DTT-14/18
- Front panel in AISI 304 stainless steel DTT-11/14/18
- Steam battery in stainless steel DTT-11/14/18
- Low pressure steam battery DTT-11/14/18
- Reduced power (12kw instead of 18kw) for electric heated 14kg and 18kg models.
- Maritime wooden packing DTT-14/18
- 400V 3N 60 Hz DTT-11-35
- 230V 3~ 50 Hz DTT-11/14/18 E
- 230V 3~ 60 Hz DTT-11/14/18 E
- 230V 3~ 60 Hz DTT-11 - DTT-35 G/S
- 440/480V 3~ 60 Hz DTT-11/14/18 (marine)

CAPACITY & DRUM	UNIT.	DTT-14 ECO-ENERGY
Capacity 1/18	Kg	15
	lb	33,1
Capacity 1/20	Kg	13,5
	lb	29,8
Ø Drum	mm	750
	inch	29,53
Drum length	mm	610
	inch	24,02
Drum volume	l	270
	cu ft	9,53
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	976
	inch	38,4
Height from floor to bottom of door	mm	618
	inch	24,33
ELECTRIC HEATING		
Evaporation capacity	L/h	14,5
	US gallon/h	3,83
Hourly output	Kg/h	29
	lb/h	63,93
Installed heating power	kW	18
Installed electrical power	kW	18,97
GAS HEATING		
Evaporation capacity (gas model)	L/h	15,6
	US gallon/h	4,121
Hourly output (gas model)	Kg/h	31,2
	lb/h	68,78
Installed gas heating power	kcal/h	17627
	Btu/h	699996
Installed gas heating power	kW	20,5
Installed electrical power	kW	0,97
Instant propane gas consumption (G31)	Kg/h	1,76
	lb/h	3,88
Instant natural gas consumption (G20)	m ³ /h	2,17
	cfm	1,28
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	30
	Btu/h	102364
Installed electrical power	kW	0,97
Steam consumption (8 barG) - Standard	kg/h	53
Steam consumption (116 psiG)	lb/h	63,8
Steam pressure	barG	6 - 9
	psiG	87 - 130,5
Standard steam inlet - outlet	BSPT- ISO7.1	3/4"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	3/4"
Steam consumption (5 barG) - Low Pressure	kg/h	57
Steam consumption (72,5 psiG) - Low Pressure	lb/h	68,7
Steam pressure (low pressure)	barG	3 - 6
	psiG	43,5 - 90
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m ³ /h	-
Thermal oil connection	BSP	-

POWER AND VENTILATION					
Drum motor power		kW	0,37		
Fan motor power		kW	0,55		
Nominal air flow rate		m ³ /h	1.200		
		cfm	706		
Ø Fume exhaust		mm	200		
		inch	7,87		
HEAT EMISSION					
Maximum total heat emission		kW	1,4		
		Btu/h	4916		
Max. front heat emission		kW	0,9		
		Btu/h	3073		
CONNECTIONS					
Tension 230V - I + N + T		Nº x mm ² / A	-	E	G / S
Tension 230V - III + T		Nº x mm ² / A	4 x 16 / 63A		3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm ² / A	5 x 10 / 32A		3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING					
Net / gross width		mm	785 / 865		
		inch	30,9 / 34,1		
Net / gross depth		mm	989 / 1.074		
		inch	38,9 / 42,3		
Net height / gross height (without heating*)		mm	1.694 / 1.840		
		inch	66,7 / 72,4		
Net / gross weight		Kg	180 / 190		
		lb	397 / 419		
OTHERS					
Sound level		dB			64

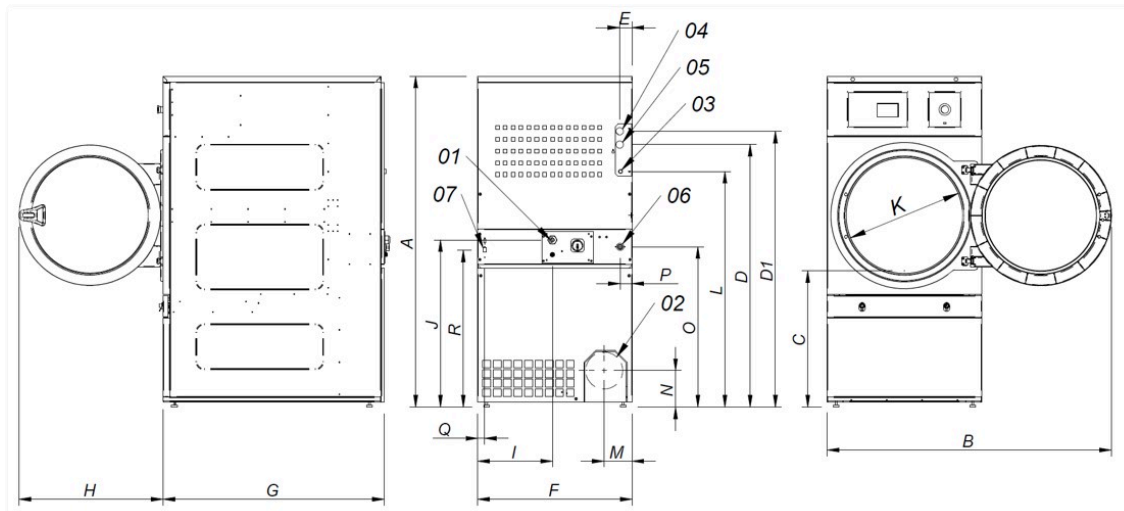

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (DTT-11-14-18)
- 04 Steam inlet 1" (DTT-22)
- 05 Condensate outlet 3/4" (DTT-11-14-18)
- 05 Condensate 1" (DTT-22)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
DTT-11 ECO-ENERGY	1.694	1.447	689	1.354	1.422	68	68	785	855	735	380	870	575	1.226	133	180	830	65	35	805
DTT-14 ECO-ENERGY	1.694	1.447	689	1.354	1.422	68	68	785	989	735	380	870	575	1.226	133	180	830	65	35	805