

## TOUCH II

User friendly and totally programmable microprocessor with 7" touch screen.  
USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.  
Videos show on display: ads, instructions, (useful for coin laundry).  
37 languages.

## OUTSTANDING FEATURES

Reversing drum action as standard.  
Stainless steel drum as standard.  
Frequency inverter as standard.

## EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow.  
Big fluff filter.

## VERSATILITY

Make to order - customisation.  
Wet Cleaning.  
OPL > Coin laundry - Standard OPL model easily trasformable to coin laundry uses (DTT-11 to DTT-35).

## CONNECTIVITY

IoT - **DOMUSCONNECT** standard.  
Management of laundries: OPL and self-service.  
Remote payment (coin laundry).

## ERGONOMICS

Drawer as fluff filter, stainless steel mesh.  
Biggest door diameters.  
Opening sense of door adjustable on site.

## MAINTENANCE

Control panel: easy access.  
Technical menu: statistics for technicians.  
Easy access to parts for reparability.

## OTHERS

Grey skinplate outer casing, stainless steel look.  
**NEW:** Geared motor drive on models DTT-45 to DTT-80  
SOFT DRY - new drum with stamped holes.  
COOL DOWN - anti-wrinkle at the end of the cycle.  
Heating options: electric, gas and steam.  
CE approved




## OPTIONS

- License IoT - DOMUSCONNECT
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double doorglass DTT-11/14/18/22
- Fire extinguisher SFEX DTT-22/28
- Opposite door opening DTT-11-35
- Tropicalized model
- Back panel with air filter DTT-11 to DTT-35
- Fluff filter with grid 0,6 mm (standard is 0,3 mm)
- Fluff filter with grid 1,2 mm (standard is 0,3 mm)
- Front and side panels in AISI 304 stainless steel DTT-22
- Front panel in AISI 304 stainless steel DTT-22
- Steam battery in stainless steel DTT-22
- Low pressure steam battery DTT-22
- Maritime wooden packing DTT-22
- 400V 3N 60 Hz DTT-11-35
- 230V 3~ 50 Hz DTT-22/28/35 E
- 230V 3~ 60 Hz DTT-22/28/35 E
- 230V 3~ 60 Hz DTT-11-35 G/S
- 440/480V 3~ 60 Hz DTT-22/28/35 (marine)
- Several payment systems for self-service

CAPACITY & DRUM	UNIT.	DTT-22
Capacity 1/18	Kg	24,4
	lb	53,9
Capacity 1/20	Kg	22,0
	lb	48,5
Ø Drum	mm	835
	inch	32,87
Drum length	mm	800
	inch	31,5
Drum volume	l	440
	cu ft	15,54
Ø Door hole	mm	574
	inch	22,60
Door center height	mm	1.030
	inch	40,55
Height from floor to bottom of door	mm	672
	inch	26,46
ELECTRIC HEATING		
Evaporation capacity	L/h	17
	US gallon/h	4,5
Hourly output	Kg/h	34
	lb/h	75
Installed heating power	kW	24
Installed electrical power	kW	24,97
GAS HEATING		
Evaporation capacity (gas model)	L/h	20
	US gallon/h	5,283
Hourly output (gas model)	Kg/h	40
	lb/h	88,2
Installed gas heating power	kcal/h	26655
	Btu/h	105776
Installed gas heating power	kW	31
Installed electrical power	kW	0,97
Instant propane gas consumption (G31)	Kg/h	2,66
	lb/h	5,86
Instant natural gas consumption (G20)	m <sup>3</sup> /h	3,28
	cfm	1,93
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	49,20
	Btu/h	167877
Installed electrical power	kW	0,97
Steam consumption (8 barG) - Standard	kg/h	87
Steam consumption (116 psiG)	lb/h	104,8
Steam pressure	barG	6 - 9
	psiG	87 - 130,5
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	-
Steam consumption (72,5 psiG) - Low Pressure	lb/h	-
Steam pressure (low pressure)	barG	3 - 6
	psiG	43,5 - 93
Low pressure steam inlet - outlet	BSPT- ISO7.1	1"
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m <sup>3</sup> /h	-
Thermal oil connection	BSP	-

POWER AND VENTILATION					
Drum motor power		kW	0,37		
Fan motor power		kW	0,55		
Nominal air flow rate		m <sup>3</sup> /h	1.200		
		cfm	706		
Ø Fume exhaust		mm	200		
		inch	7,87		
HEAT EMISSION					
Maximum total heat emission		kW	2,4		
		Btu/h	8194		
Max. front heat emission		kW	1,7		
		Btu/h	5736		
CONNECTIONS					
Tension 230V - I + N + T		Nº x mm <sup>2</sup> / A	-	E	G / S
Tension 230V - III + T		Nº x mm <sup>2</sup> / A	4 x 25 / 80A		3 x 1,5 / 16A
Tension 400V - III + N + T		Nº x mm <sup>2</sup> / A	5 x 10 / 40A		3 x 1,5 / 16A
NET DIMENSIONS / D. WITH PACKING					
Net / gross width		mm	890 / 970		
		inch	35 / 38,2		
Net / gross depth		mm	1.255 / 1.345		
		inch	49,4 / 53		
Net height / gross height (without heating*)		mm	1.812 / 1.940		
		inch	71,3 / 76,4		
Net / gross weight		Kg	210 / 230		
		lb	463 / 507		
OTHERS					
Sound level		dB	65		

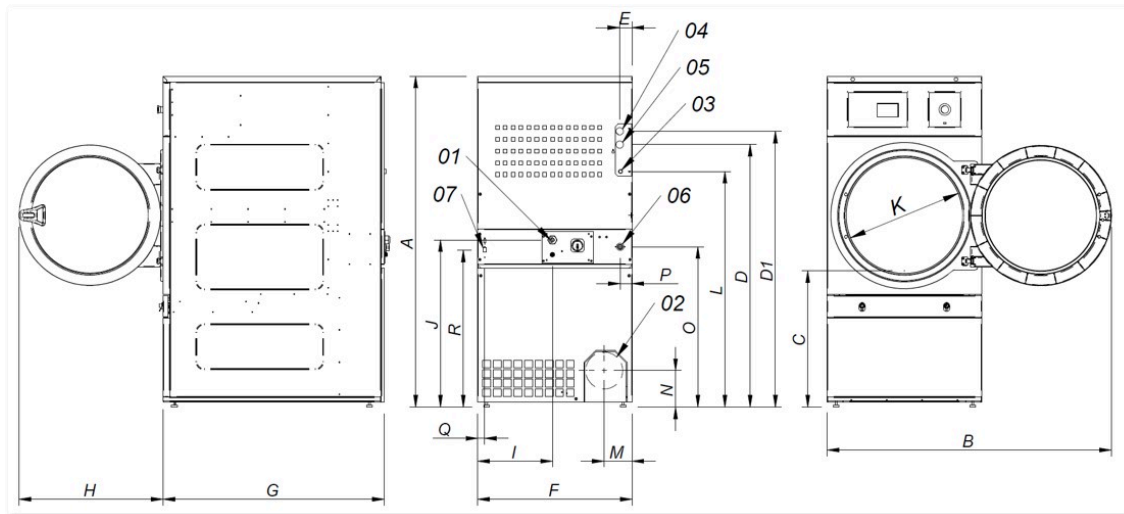

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 3/4" (DTT-11-14-18)
- 04 Steam inlet 1" (DTT-22)
- 05 Condensate outlet 3/4" (DTT-11-14-18)
- 05 Condensate 1" (DTT-22)
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
DTT-18	1.694	1.447	689	1.354	1.422	68	68	785	1.125	735	380	870	575	1.226	133	180	830	65	35	805
DTT-22	1.812	1.552	743	1.430	1.532	112	55	890	1.255	735	107	920	575	1.344	238	180	885	65	37	860